
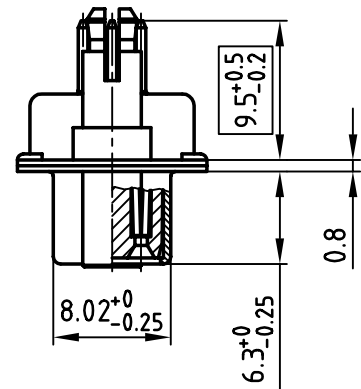
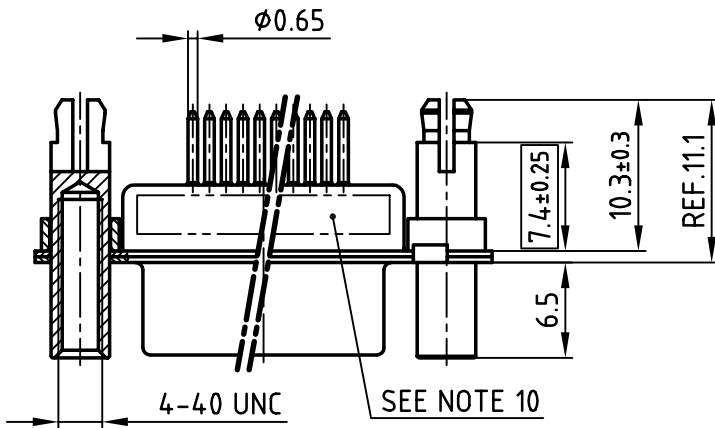


used for: D-SUB HD FILTER

POS.	A ^{-0.76}	B ^{-0.25}	C ^{+0.12} _{-0.13}	Part NO.
15	31.19	16.46	25.00	242A20770X
26	39.52	24.79	33.30 ^{+0.15} _{-0.1}	242A20780X

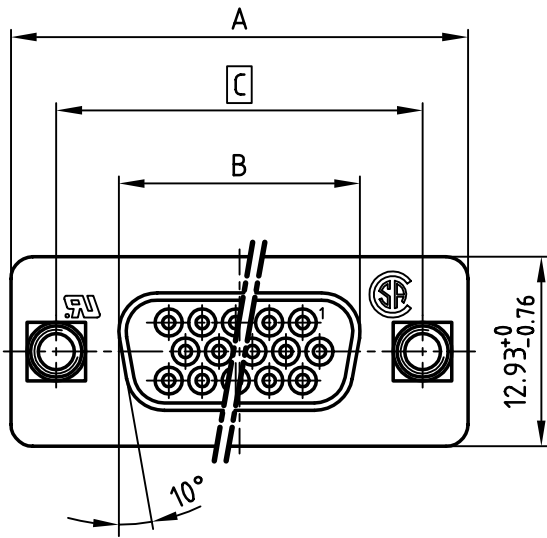

NOTES:

- METALSHELLS: STEEL; min. 320µ" TIN
- INSULATORS: PBT GF UL 94 V-0, BLACK
- CONTACTS: COPPER ALLOY
PLATING: min. 8µ" HARD GOLD OVER min. 50µ" NICKEL
- THREADED LOCK: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
PCB-HOLE: $\phi 3.1 \pm 0.1$; PCB THICKNESS 1.6mm
- COLLAR: COPPER ALLOY; min. 200µ" TIN over 80µ" NICKEL
- CAPACITANCE: 370pF $\pm 20\%$
- DIELECTRIC WITHSTANDING VOLTAGE: 300 VDC
- P.C.B. HOLE DRILLINGS SEE SHEET 2
- MAXIMUM TORQUE VALUE FOR THREAD: 6" LBS
- CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW
- = CRITICAL DIMENSION


APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND


tolerance			
2002	date	name	
drawn	06.09,	Parei	
appd.	06.09.	Mickenbecker	
norm	DIN 41652		
d-old			
rev.	description	date	name

scale:	2:1
material:	SEE NOTES
title:	
D-SUB HD FILTER FEMALE 15+26pos. SOLDER PIN STRAIGHT with threaded lock and spacer clip	
dwg no:	AutoCAD 2000
24K1A315	
part no:	SEE TABLE
DIN-A	
4	
sh:1/2	

used for: D-SUB HD FILTER

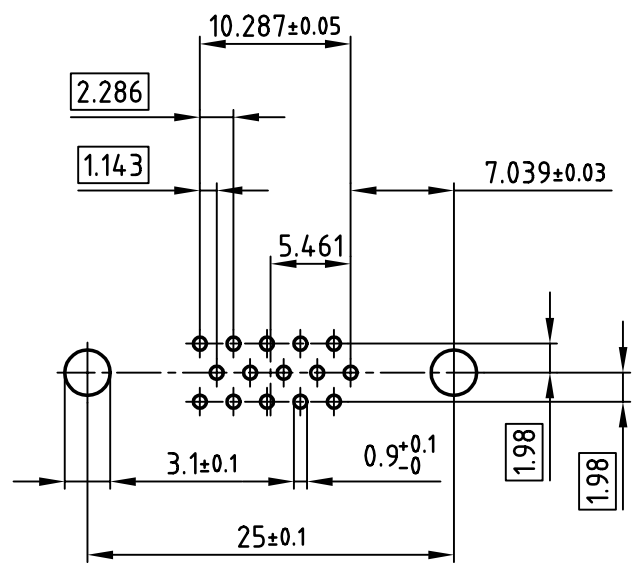

15pos.

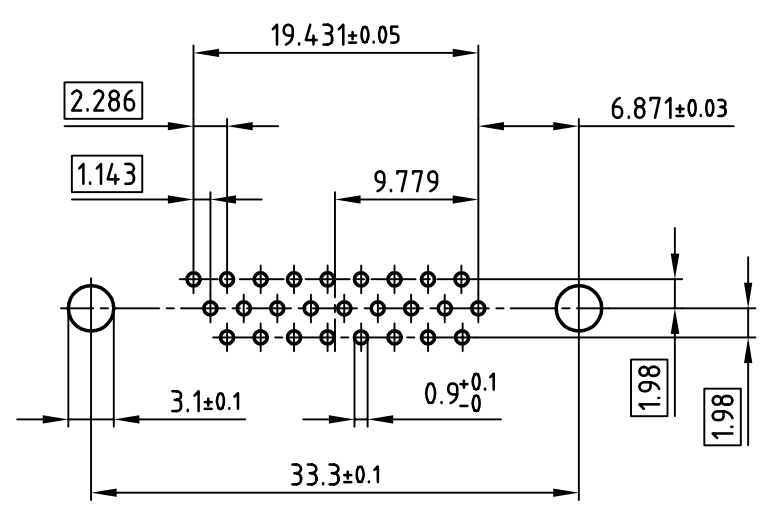

26pos.

APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	
CUSTOMER APPROVAL DATE:	
NAME:	TITLE:
COMPANY NAME:	
APPROVAL # FREIGABE # DEBLOCAGE # AUTORIZACION # APPROVAL	

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
 OWNERSHIP AND COPYRIGHT OF CONEC GmbH
 DO NOT ALTER CAD DRAWING BY HAND

tolerance				scale: 2:1
				material: SEE SHEET 1
2002	date	name		P.C.B. HOLE DRILLINGS D-SUB HD FILTER FEMALE 15+26pos. with threaded lock and spacer clip
drawn	06.09,	Parei		
appd.	06.09.	Mickenbecker		
norm	DIN 41652			
d-old				
rev.	description	date	name	dwg no: AutoCAD 2000 24K1A315 part no: SEE SHEET 1



DIN-A
4
sh:2/2