


適合ターミナル  
ACCEPT TERMINAL  
5194\*,5225\*

注記  
NOTES

1. 各部の反りは0.5最大。  
WARPING : 0.5 MAX.
2. サークットNO.はNO."1"のみ表示。  
CIRCUIT NO.: 1 ONLY.
3. ELV及びRoHS適合品。  
ELV AND RoHS COMPLIANT.

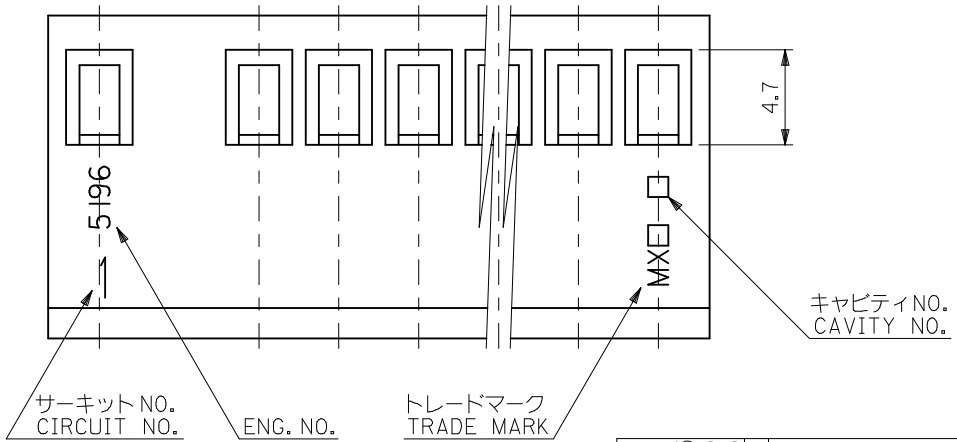

52.62	47.52	09-50-1123	5196-12	12
48.66	43.56	↑ -1113	↑ -11	11
44.7	39.6	-1103	-10	10
40.74	35.64	-1093	-09	9
36.78	31.68	-1083	-08	8
32.82	27.72	-1073	-07	7
28.86	23.76	-1063	-06	6
24.9	19.8	-1053	-05	5
20.94	15.84	-1043	-04	4
16.98	11.88	↓ -1033	↓ -03	3
13.02	7.92	09-50-1023	5196-02	2
B		A	EDP. NO.	ENG. NO.

REVISED EC NO: J2009-2074 DRWN: CARIZONO 2009/04/15 CHKD: T. HIRUYAMA 2009/04/16 APPR: NUKITA 2009/04/16	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 4:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		
	10 UNDER	±0.2	DRAWN BY M. FUJIKURA		DATE 1992/09/07		TITLE SPOX 7.92/3.96 REC HSG				
	10 OVER 30 UNDER	±0.25	CHECKED BY H. HIRAMOTO		DATE 1992/09/08		MOLEX INCORPORATED DOCUMENT NO. SD-5196-001 SHEET NO. 1 OF 1				
	30 OVER	±0.3	APPROVED BY M. FUKUSHIMA		DATE 1992/09/08						
ANGULAR ±3 °		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

材料 MATERIAL  
 ナイロン66, UL94V-2  
 色: オフホワイト  
 NYLON66, UL94V-2  
 COLOR: OFFWHITE