

## Housing - HC-B 16-SMLD-67/M2M25 - 1586882

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Box mounting base, with single locking latch, height 67 mm, with screw connection, 2x M25, with protective cover

Figure shows product variant without screw connection

### Product Features



### Key commercial data

Packing unit	1 pc
Custom tariff number	85389099
Country of origin	Germany

### Technical data

#### Dimensions

Height	67 mm
Width	57 mm
Length	117 mm
Wrench size, union nut	25 mm
External cable diameter	9 mm ... 18 mm (Cable 1)
	9 mm ... 18 mm (Cable 2)

#### Ambient conditions

Degree of protection of housing (IP)	IP65
Ambient temperature (operation)	-40 °C ... 125 °C

#### General

Note	For contact inserts HC-B16, BB32, BBB40, D40, DD72, HS6, M, K
Type	B16

## Housing - HC-B 16-SMLD-67/M2M25 - 1586882

### Technical data

#### General

Housing type	Box mounting bases
Locking type	With single locking latch
No. of cable outlets	2
Cable exit	Lateral
Screw connection	with
Type of the screw connection	2x M25
Protective cover	Yes
Housing material	Aluminum die-cast
Housing surface material	Powder-coated, gray
Seal material	NBR
Cable gland material	Nickel-plated brass
Cable seal material	NBR
Material lock	Stainless steel, handle: PA
Material grip body interlock	PA
Material, protective cover	Polyamide

### Classifications

#### eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27143424
eCl@ss 5.1	27143424
eCl@ss 6.0	27143424
eCl@ss 7.0	27440209
eCl@ss 8.0	27440202

#### ETIM

ETIM 3.0	EC000437
ETIM 4.0	EC000437
ETIM 5.0	EC000437

#### UNSPSC

UNSPSC 6.01	31261502
UNSPSC 7.0901	31261502
UNSPSC 11	31261502
UNSPSC 12.01	31261502
UNSPSC 13.2	31261502

# Housing - HC-B 16-SMLD-67/M2M25 - 1586882

## Approvals

Approvals

---

Approvals

EAC

---

Ex Approvals

---

Approvals submitted


---

## Approval details

EAC
-----

## Drawings

Dimensional drawing

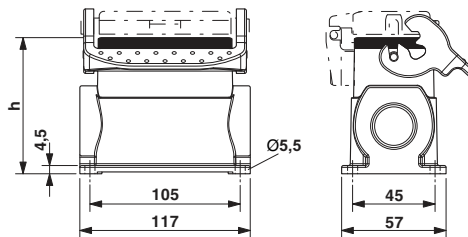

Dimensional drawing; h = 67 mm

---