

Accessories - IC-DFR 5 - 1852053

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Accessories, Number of positions: 5, Pitch: 5.08 mm, Color: green, This assembly frame can only be used in combination with IC 2,5/...-STGF-5,08

Why buy this product

- Feed-through assembly frame for inverted COMBICON plug IC 2,5/-STGF-5,08
- Vibration-resistant screw connection for both plugs provided by screw flanges
- Up to a panel thickness of 1.5 mm, the frame can be screwed before the IC plug is mounted
- Snap-locking of the IC plug into the frame
- Frame in plate cutout can be used and screwed on.
- Fitting the MSTB 2,5/...-STF-5,08 plug from outside



Key commercial data

| | |
|------------------------|---|
| Packing unit | 1 |
| Minimum order quantity | 50 |
| Catalog page | Page 322 (CC-2011) |
| GTIN |  4 017918 108939 |
| Custom tariff number | 39269097 |
| Country of origin | POLAND |

Technical data

Dimensions / positions

| | |
|---------------------|----------|
| Pitch | 5.08 mm |
| Dimension a | 20.32 mm |
| Number of positions | 5 |

Technical data

| | |
|---|---------------------|
| Range of articles | IC-DFR |
| Insulating material group | I |
| Nominal cross section | 2.5 mm ² |
| Insulating material | PA |
| Inflammability class according to UL 94 | V0 |

Accessories - IC-DFR 5 - 1852053

Classifications

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC000879 |
| ETIM 4.0 | EC000879 |
| ETIM 5.0 | EC000879 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 11 | 39121409 |
| UNSPSC 12.01 | 39121409 |
| UNSPSC 13.2 | 39121409 |
| UNSPSC 6.01 | 30211810 |
| UNSPSC 7.0901 | 39121409 |

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260704 |
| eCl@ss 7.0 | 27440402 |

Accessories

Accessories

Assembly

Screw set - DFK-MSTB-SS - 0708263



Screw set, for securing the header to the device wall, consists of an M3 x 10 screw, with a spring washer and a nut

Printed-circuit board connector - IC 2,5/ 2-STGF-5,08 - 1825501




Plug component, Nominal current: 12 A, Rated voltage (III/2): 320 V, Number of positions: 2, Pitch: 5.08 mm, Connection method: Screw connection, Color: green, Contact surface: Tin


Drawings

Accessories - IC-DFR 5 - 1852053

Drilling diagram

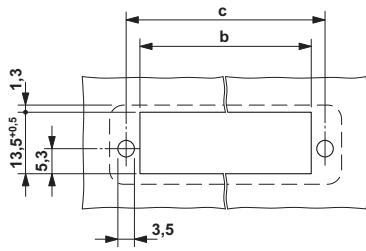

Dimensioned drawing

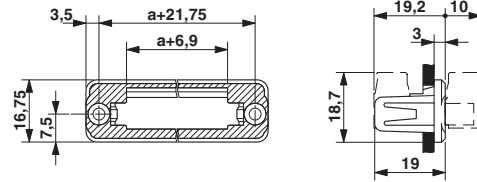

Dimension b: $10.84 \text{ mm} + (\text{no. of pos.} \times 5.08 \text{ mm})$
Dimension c: $\text{Dim. b} + 5.83 \text{ mm}$