

1

2

3

4

5

6

7

A

B

C

D

E

F

A


B

C

D




E

F

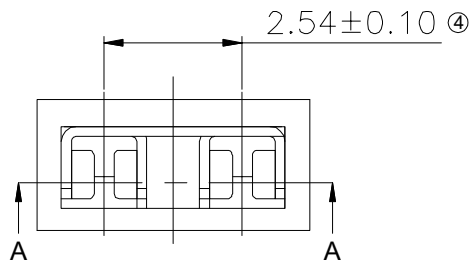

NOTES:

1. Insulator: PBT+30% G.F, UL94V-0, Black
- ④ 2. Contact : Phosphor Bronze, Au or Sn over Ni
3. Current Rating: 3.0AMP
4. Dielectric Withstanding Voltage: 1000V AC/ minute
- ④ 5. Insulation Resistance: 500MΩ Min.
- ④ 6. Contact Resistance: 20mΩ Max.
7. Operating Temperature: -40°C ~ +105°C
- ③ AKSNT/x BLACK
 - Contact Area Plating: ③
 - G: Gold Flash
 - Z: Tinned

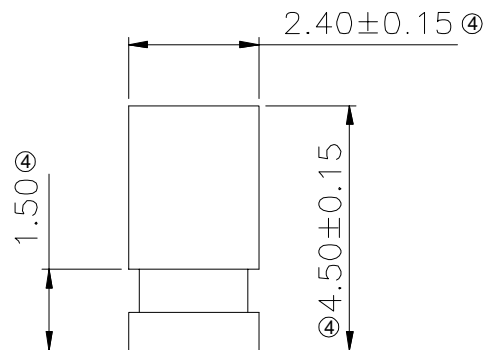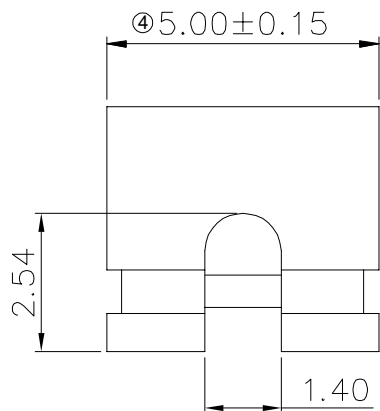

SECTION A-A

G

H

G

H

RoHS compliant
Unit:mm

Scale	Free				Date	Name	Customer-No.		
TOLERANCE					Drawn	03.03.2004	Hellwig		
X.	±0.35								
X.X	±0.25	④	Update the dimension and tolerance	02.03.2022	Peter	Approved	02.03.2022	Peter	ASSMANN WSW-No. AKSNT/G BLACK AKSNT/Z BLACK
X.XX	±0.20	③	Update	07.06.2013	Winnie				
X.XXX	±0.15	②	Update	27.07.2009	Rale				Drawing-No.
DIM	TOL	①	Drawn	03.03.2004	Hellwig				ASS 1004 CO
Angle	TOL	Id.	Modification	Date	Name	Replace	SHEET	1 / 1	

1

2

3

4

5

6

7