


PN2697



Pressure sensor with display

PN-001BREN14-MFRKG/US/ IV

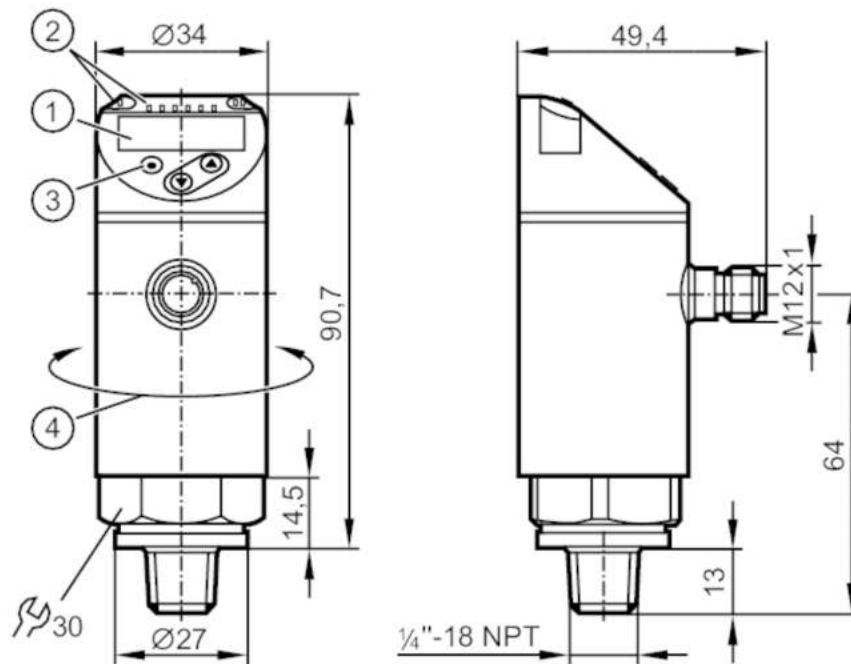

- 1 alphanumeric display 4-digit red/green
- 2 LEDs Display unit / switching status
- 3 programming button
- 4 upper part of the housing can be rotated 345°



Product characteristics

| | | | | | |
|------------------------------|-------------------------------------------------------------|-----------------|------------------|---------------------|--------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analogue outputs: 1 | | | | |
| Measuring range | -0.05...1 bar | -50...1000 mbar | -0.72...14.5 psi | -20.1...401.5 inH2O | -5...100 kPa |
| Process connection | threaded connection 1/4" NPT external thread | | | | |

Application

| | | | | | |
|------------------------------------------|--------------------------------------------|------------|----------|----------|--|
| Special feature | Gold-plated contacts | | | | |
| Measuring element | ceramic-capacitive pressure measuring cell | | | | |
| Application | for industrial applications | | | | |
| Media | liquids and gases | | | | |
| Medium temperature [°C] | -25...80 | | | | |
| Min. bursting pressure | 30000 mbar | 450 psi | 3000 kPa | | |
| Pressure rating | 10000 mbar | 145 psi | 1000 kPa | | |
| Vacuum resistance [mbar] | -1000 | | | | |
| Type of pressure | relative pressure | | | | |
| MAWP (for applications according to CRN) | 10 bar | 10000 mbar | 145 psi | 1000 kPa | |

Electrical data

| | | | | | |
|---------------------------------|----------------------------|--|--|--|--|
| Operating voltage [V] | 18...30 DC; (to SELV/PELV) | | | | |
| Current consumption [mA] | < 35 | | | | |
| Min. insulation resistance [MΩ] | 100; (500 V DC) | | | | |

PN2697



Pressure sensor with display

PN-001BREN14-MFRKG/US/ IV

| | |
|-----------------------------|-----|
| Protection class | III |
| Reverse polarity protection | yes |
| Power-on delay time [s] | 0.3 |
| Integrated watchdog | yes |

Inputs / outputs

| | |
|------------------------------|-------------------------------------------------------------|
| Number of inputs and outputs | Number of digital outputs: 2; Number of analogue outputs: 1 |
|------------------------------|-------------------------------------------------------------|

Outputs

| | |
|------------------------------------------------------|------------------------------------------------------------|
| Total number of outputs | 2 |
| Output signal | switching signal; analogue signal; IO-Link; (configurable) |
| Electrical design | PNP/NPN |
| Number of digital outputs | 2 |
| Output function | normally open / normally closed; (parameterisable) |
| Max. voltage drop switching output DC [V] | 2 |
| Permanent current rating of switching output DC [mA] | 250 |
| Switching frequency DC [Hz] | < 500 |
| Number of analogue outputs | 1 |
| Analogue current output [mA] | 4...20; (scalable 1:5) |
| Max. load [Ω] | 500 |
| Analogue voltage output [V] | 0...10; (scalable 1:5) |
| Min. load resistance [Ω] | 2000 |
| Short-circuit protection | yes |
| Type of short-circuit protection | pulsed |
| Overload protection | yes |

Measuring/setting range

| | | | | | |
|----------------------|-----------------|------------------|--------------------|---------------------|--------------|
| Measuring range | -0.05...1 bar | -50...1000 mbar | -0.72...14.5 psi | -20.1...401.5 inH2O | -5...100 kPa |
| Analogue start point | -50...800 mbar | -0.72...11.6 psi | -20...321 inH2O | -5...80 kPa | |
| Analogue end point | 150...1000 mbar | 2.18...14.5 psi | 60.5...401.5 inH2O | 15...100 kPa | |

Factory setting / CMPT = 2

| | | | | |
|-----------------------------------|-----------------|------------------|---------------------|-----------------|
| Set point SP | -44...1000 mbar | -0.64...14.5 psi | -17.5...401.5 inH2O | -4.4...100 kPa |
| Reset point rP | -48...996 mbar | -0.7...14.44 psi | -19...400 inH2O | -4.4...99.6 kPa |
| Min. difference between SP and rP | 6 mbar | 0.06 psi | 2 inH2O | 0.6 kPa |
| In steps of | 2 mbar | 0.02 psi | 0.5 inH2O | 0.2 kPa |

Status_B High Resolution / CMPT = 3

| | | | | |
|-----------------------------------|-----------------|-------------------|---------------------|-----------------|
| Set point SP | -44...1000 mbar | -0.63...14.5 psi | -17.5...401.5 inH2O | -4.4...100 kPa |
| Reset point rP | -48...996 mbar | -0.69...14.44 psi | -19.2...399.8 inH2O | -4.8...99.6 kPa |
| Min. difference between SP and rP | 5 mbar | 0.06 psi | 1.7 inH2O | 0.5 kPa |
| In steps of | 1 mbar | 0.01 psi | 0.1 inH2O | 0.1 kPa |

Accuracy / deviations

| | |
|---------------------------------------|--------------------------|
| Switch point accuracy [% of the span] | < ± 0,4; (Turn down 1:1) |
|---------------------------------------|--------------------------|



Pressure sensor with display

PN-001BREN14-MFRKG/US/ IV

| | | |
|------------------------------------|------------------------|----------------------------------------------------------------------------------------------------------|
| Repeatability | [% of the span] | < ± 0,1; (with temperature fluctuations < 10 K; Turn down 1:1) |
| Characteristics deviation | [% of the span] | < ± 0,25 (BFSL) / < ± 0,5 (LS); (Turn down 1:1; BFSL = Best Fit Straight Line; LS = limit value setting) |
| Hysteresis deviation | [% of the span] | < ± 0,1; (Turn down 1:1) |
| Long-term stability | [% of the span] | < ± 0,05; (Turn down 1:1; per 6 months) |
| Temperature coefficient zero point | [% of the span / 10 K] | < ± 0,2; (-0...80 °C) |
| Temperature coefficient span | [% of the span / 10 K] | < ± 0,2; (-0...80 °C) |
| Notes on the accuracy / deviation | | switch point accuracy, linearity error under DNV GL: < ± 1%: < ± 1% |

Response times

| | | |
|-------------------------------------|------|--------|
| Response time | [ms] | < 1.5 |
| Delay time programmable dS, dr | [s] | 0...50 |
| Damping process value dAP | [s] | 0...4 |
| Damping for the analogue output dAA | [s] | 0...4 |
| Max. response time analogue output | [ms] | 3 |

Software / programming

| | |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Parameter setting options | hysteresis / window; normally open / normally closed; switch-on/ switch-off delay; Damping; Display unit; current/voltage output |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------|

Interfaces

| | | | | | | | |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------|----------|----------------------------|-----|-------------------------------------|-----|
| Communication interface | IO-Link | | | | | | |
| Transmission type | COM2 (38,4 kBaud) | | | | | | |
| IO-Link revision | 1.1 | | | | | | |
| SDCI standard | IEC 61131-9 | | | | | | |
| SIO mode | yes | | | | | | |
| Required master port type | A; (when pin 2 not connected: B) | | | | | | |
| Supported DeviceIDs | <table border="1"> <tr> <td>Type of operation</td> <td>DeviceID</td> </tr> <tr> <td>Factory setting / CMPT = 2</td> <td>475</td> </tr> <tr> <td>Status_B High Resolution / CMPT = 3</td> <td>991</td> </tr> </table> | Type of operation | DeviceID | Factory setting / CMPT = 2 | 475 | Status_B High Resolution / CMPT = 3 | 991 |
| Type of operation | DeviceID | | | | | | |
| Factory setting / CMPT = 2 | 475 | | | | | | |
| Status_B High Resolution / CMPT = 3 | 991 | | | | | | |
| Note | For further information please see the IO-Link PDF file under "Downloads" | | | | | | |

Factory setting / CMPT = 2

| | | | | | | | |
|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------------|----------|----|------------------------------|---|
| Profiles | Smart Sensor: Process Data Variable; Device Identification, Device Diagnosis | | | | | | |
| Min. process cycle time | [ms] 2.3 | | | | | | |
| IO-Link resolution pressure | [mbar] 1 | | | | | | |
| IO-Link process data (cyclical) | <table border="1"> <tr> <td>function</td> <td>bit length</td> </tr> <tr> <td>pressure</td> <td>14</td> </tr> <tr> <td>binary switching information</td> <td>2</td> </tr> </table> | function | bit length | pressure | 14 | binary switching information | 2 |
| function | bit length | | | | | | |
| pressure | 14 | | | | | | |
| binary switching information | 2 | | | | | | |
| IO-Link functions (acyclical) | application specific tag | | | | | | |

PN2697



Pressure sensor with display

PN-001BREN14-MFRKG/US/ IV

| | | |
|------------------------------------------------------|--------------------------------------------------------------------------------------------|-----------------------------------------------------|
| Status_B High Resolution / CMPT = 3 | | |
| Profiles | Smart Sensor ED2: Digital Measuring Sensor (0x000A), Identification and Diagnosis (0x4000) | |
| Min. process cycle time [ms] | 3 | |
| IO-Link resolution pressure [mbar] | 0.5 | |
| IO-Link process data (cyclical) | function | bit length |
| | pressure | 16 |
| | device status | 4 |
| | binary switching information | 2 |
| IO-Link functions (acyclical) | application specific tag | |
| Operating conditions | | |
| Ambient temperature [°C] | -25...80 | |
| Storage temperature [°C] | -40...100 | |
| Protection | IP 65; IP 67 | |
| Tests / approvals | | |
| EMC | DIN EN 61000-6-2 | |
| | DIN EN 61000-6-3 | |
| Shock resistance | DIN EN 60068-2-27 | 50 g (11 ms) |
| Vibration resistance | DIN EN 60068-2-6 | 20 g (10...2000 Hz) |
| MTTF [years] | 138 | |
| UL approval | UL Approval no. | J012 |
| Pressure Equipment Directive | Sound engineering practice; can be used for group 2 fluids; group 1 fluids on request | |
| Mechanical data | | |
| Weight [g] | 244.5 | |
| Materials | stainless steel (1.4404 / 316L); PBT+PC-GF30; PBT-GF20; PC | |
| Materials (wetted parts) | stainless steel (1.4404 / 316L); Al ₂ O ₃ (96%; ceramics); FKM | |
| Min. pressure cycles | 100 million | |
| Tightening torque [Nm] | > 50; (depends on lubrication, seal and pressure rating) | |
| Process connection | threaded connection 1/4" NPT external thread | |
| Restrictor element integrated | no (can be retrofitted) | |
| Displays / operating elements | | |
| Display | Display unit | 4 x LED, green (mbar, kPa, psi, inH ₂ O) |
| | switching status | 2 x LED, yellow |
| | measured values | alphanumeric display, red/green 4-digit |
| Remarks | | |
| Pack quantity | 1 pcs. | |
| Electrical connection | | |
| Connector: 1 x M12; coding: A; Contacts: gold-plated | | |
| | | |


PN2697



Pressure sensor with display

PN-001BREN14-MFRKG/US/ IV

Connection

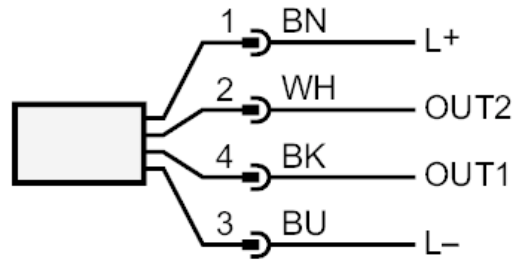

| | |
|------|------------------|
| OUT1 | switching output |
| | IO-Link |
| OUT2 | switching output |
| | analogue output |
| | Core colours : |
| BK = | black |
| BN = | brown |
| BU = | blue |
| WH = | white |