

## Protective covers - HC-B 10-SD-MQT/FS-AL - 1584541

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Protective cover B10, with double locking latch, protective cover material: Al, height: 16.9 mm, seal: yes, With lanyard, Diameter of retaining cord eyelet: 30 mm



RoHS

### Key Commercial Data

|                                      |   |
|--------------------------------------|---|
| Packing unit                         | 1 STK   |
| GTIN                                 | <br>4 046356 144131 |
| GTIN                                 | 4046356144131   |
| Weight per Piece (excluding packing) | 104.850 g   |
| Custom tariff number                 | 85389099  |
| Country of origin                    | Germany   |

### Technical data

#### Dimensions

|                                   |         |
|-----------------------------------|---------|
| Length                            | 73 mm   |
| Width                             | 43 mm   |
| Height                            | 16.9 mm |
| Diameter of retaining cord eyelet | 30 mm   |

#### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Degree of protection            | IP66              |
| Ambient temperature (operation) | -40 °C ... 125 °C |

#### General

|      |   |
|------|---|
| Size | B10   |
| Type | for sleeve housing without double locking latch |

# Protective covers - HC-B 10-SD-MQT/FS-AL - 1584541


## Technical data

### General

|                        |  |
|------------------------|--|
| Material               | Aluminum, die-cast   |
| Seal material          | NBR  |
| Locking latch material | High-grade steel, handle: PA-GF  |
| Color                  | gray   |
| Seal present           | yes  |
| Assembly instructions  | Not for HC-B...EMC housings  |
| Connection             | The guide pins of the protective cover must be removed when using coding sockets, pins, and bolts. |

## Drawings

Dimensional drawing

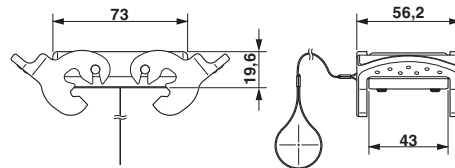

Dimensional drawing

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27141210 |
| eCl@ss 4.1 | 27141210 |
| eCl@ss 5.0 | 27149110 |
| eCl@ss 5.1 | 27149110 |
| eCl@ss 6.0 | 27261210 |
| eCl@ss 7.0 | 27440208 |
| eCl@ss 8.0 | 27440208 |
| eCl@ss 9.0 | 27440208 |

### ETIM

|          |          |
|----------|----------|
| ETIM 2.0 | EC000241 |
| ETIM 3.0 | EC002040 |
| ETIM 4.0 | EC002314 |
| ETIM 5.0 | EC002314 |
| ETIM 6.0 | EC002314 |

# Protective covers - HC-B 10-SD-MQT/FS-AL - 1584541

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30212113 |
| UNSPSC 7.0901 | 39121712 |
| UNSPSC 11     | 39121712 |
| UNSPSC 12.01  | 39121712 |
| UNSPSC 13.2   | 39121421 |

## Approvals

### Approvals

---

#### Approvals

EAC

---

#### Ex Approvals

---

### Approval details

|     |   |                          |
|-----|---|--------------------------|
| EAC |  | RU C-<br>DE.AI30.B.01102 |
|-----|---|--------------------------|

---