


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HQ	00		7	Notes and dimensions updated	06APR2004	DJI	MAH
			8	Revised to match cust. drawing	19AUG2004	DJL	MAH
			A	Release to production	12OCT2004	DJL	MAH
			B	Cust. part number revised	06DEC2004	DJL	MAH

NOTES:

- WWAN (MMCX CABLE)
 Frequency: 824 - 960 MHz and 1710 - 1990 MHz
 VSWR: < 4.0:1
 Total Gain: -5dbi average, 0 dbi peak including cable loss.
 - WLAN/BT (GSC and SSMT CABLE)
 frequency: 2400 - 2483.5 MHz
 VSWR: < 2.5:1
 Total Gain: -4dbi average, 0dbi peak including cable loss.
 - Ground flex assemblies: solder as shown.
 - A. Material:
 Primary side: 1mil Polyimide
 Internal Copper: 1oz. copper exposed surfaces to be tin plated.
 Secondary side: 1mil Polyimide.
 - B. Assembly:
 Primary side, internal copper and secondary side to be permanently laminated together
 - C. .4064mm (0.016 inch) radius allowed on 90 degree corners.
 - Temperature: -20°C (-4°F) to + 60 °C (+ 140°F).
 - Humidity: 0 - 100% relative humidity, including condensing.
 - Shock: 3000 G's.
 - Vibration: 6 GRMS random vibration.
 - ESD: IEC 61000 - 4 - 2 ESD level 4 air (15 KV), contact (8 KV).
 - Area indicated to be free of solder and epoxy.
 - Apply 3M DP - 190 A/B epoxy adhesive to strain relief WWAN - MMCX, BT/802, II-SSMT and GSC cable assemblies. Epoxy bead shall be .125±.025 inch in diameter and bridge from one side of the wire to the other and cover the top of the wire. To be applied at the following distance away from the end tip of center conductor along the axis of the cable:
 A. WWAN - MMCX Cable assembly: .330±.020 inch
 B. WLAN/BT SSMT Cable assembly: .270±.020 inch
 C. WLAN/BT GSC Cable assembly: .300±.020 inch
 - Dimension shown is to the tip of center conductor. Exposed cable shield and center conductor shall be soldered to its respective solder pads.
 - Silkscreen approximately where shown with 10-64160-03 and latest revision level.
 - Workmanship per Symbol standard SS-03800-57.
 - Package per STI general packing spec 50-04100-013.
- * See note 11.

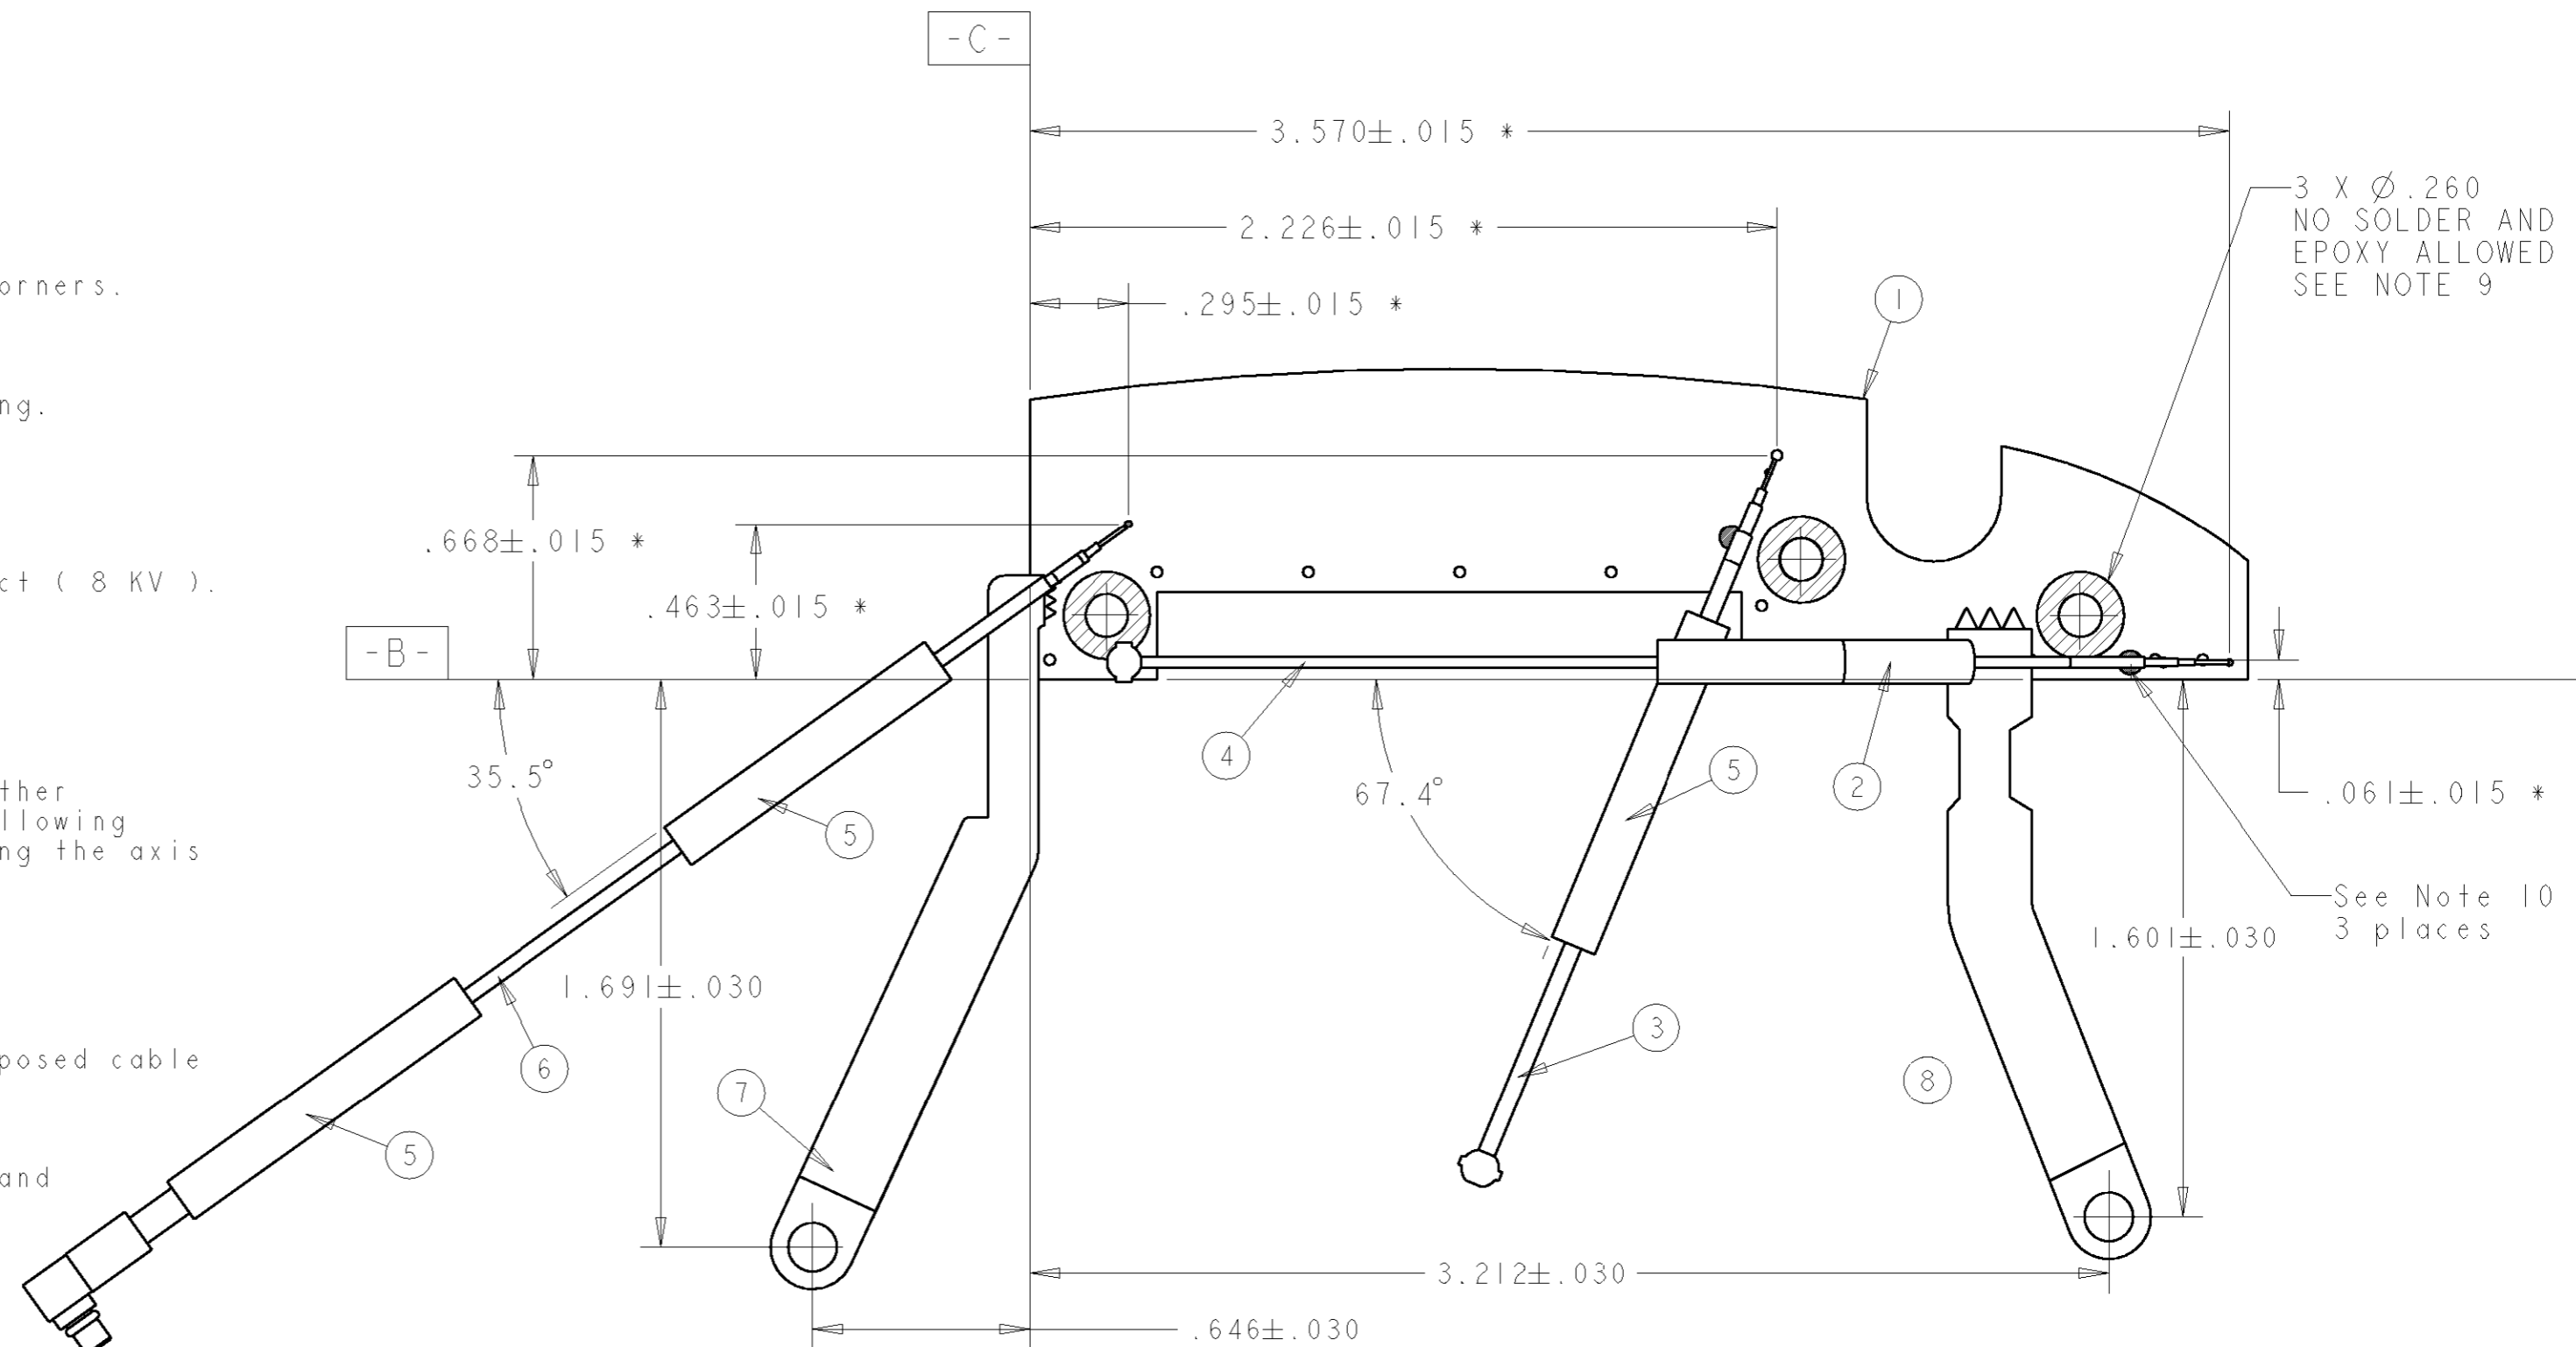


1513258-1
 SCALE 2:1

8	1513289-1	FLEX CIRCUIT 1	1
7	1513290-1	FLEX CIRCUIT 2	1
6	1713526-1	WWAN-MMCX (CABLE)	1
5	1513269	CAPCON-LST-050	2.26 inches
4	1513270-1	WLAN/BT GSC (CABLE)	1
3	1408494-1	WLAN/BT SSMT(CABLE)	1
2	1513268	CAPCON-LST-040	1.10 inches
1	1513258-2	PRINTED CIRCUIT BOARD	1
ITEM	PART NUMBER	PART DESCRIPTION	QTY.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN DJL	06DEC2004	Tyco Electronics Rochester, New York 14623	
DIMENSIONS: INCHES		CHK -	APVD -	NAME Symbol Aquarius Antenna Module	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.05 2 PLC ±.01 3 PLC ±.005 4 PLC ±.001 ANGLES ±°		PRODUCT SPEC -	APPLICATION SPEC -	SIZE A200779	DRAWING NO G-1513258
MATERIAL -		FINISH -	WEIGHT -	RESTRICTED TO -	CUSTOMER DRAWING
		SCALE 1:1	SHEET 1	OF 3	REV B

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HQ	00	-	-	SEE SHEET 1	-	-	-

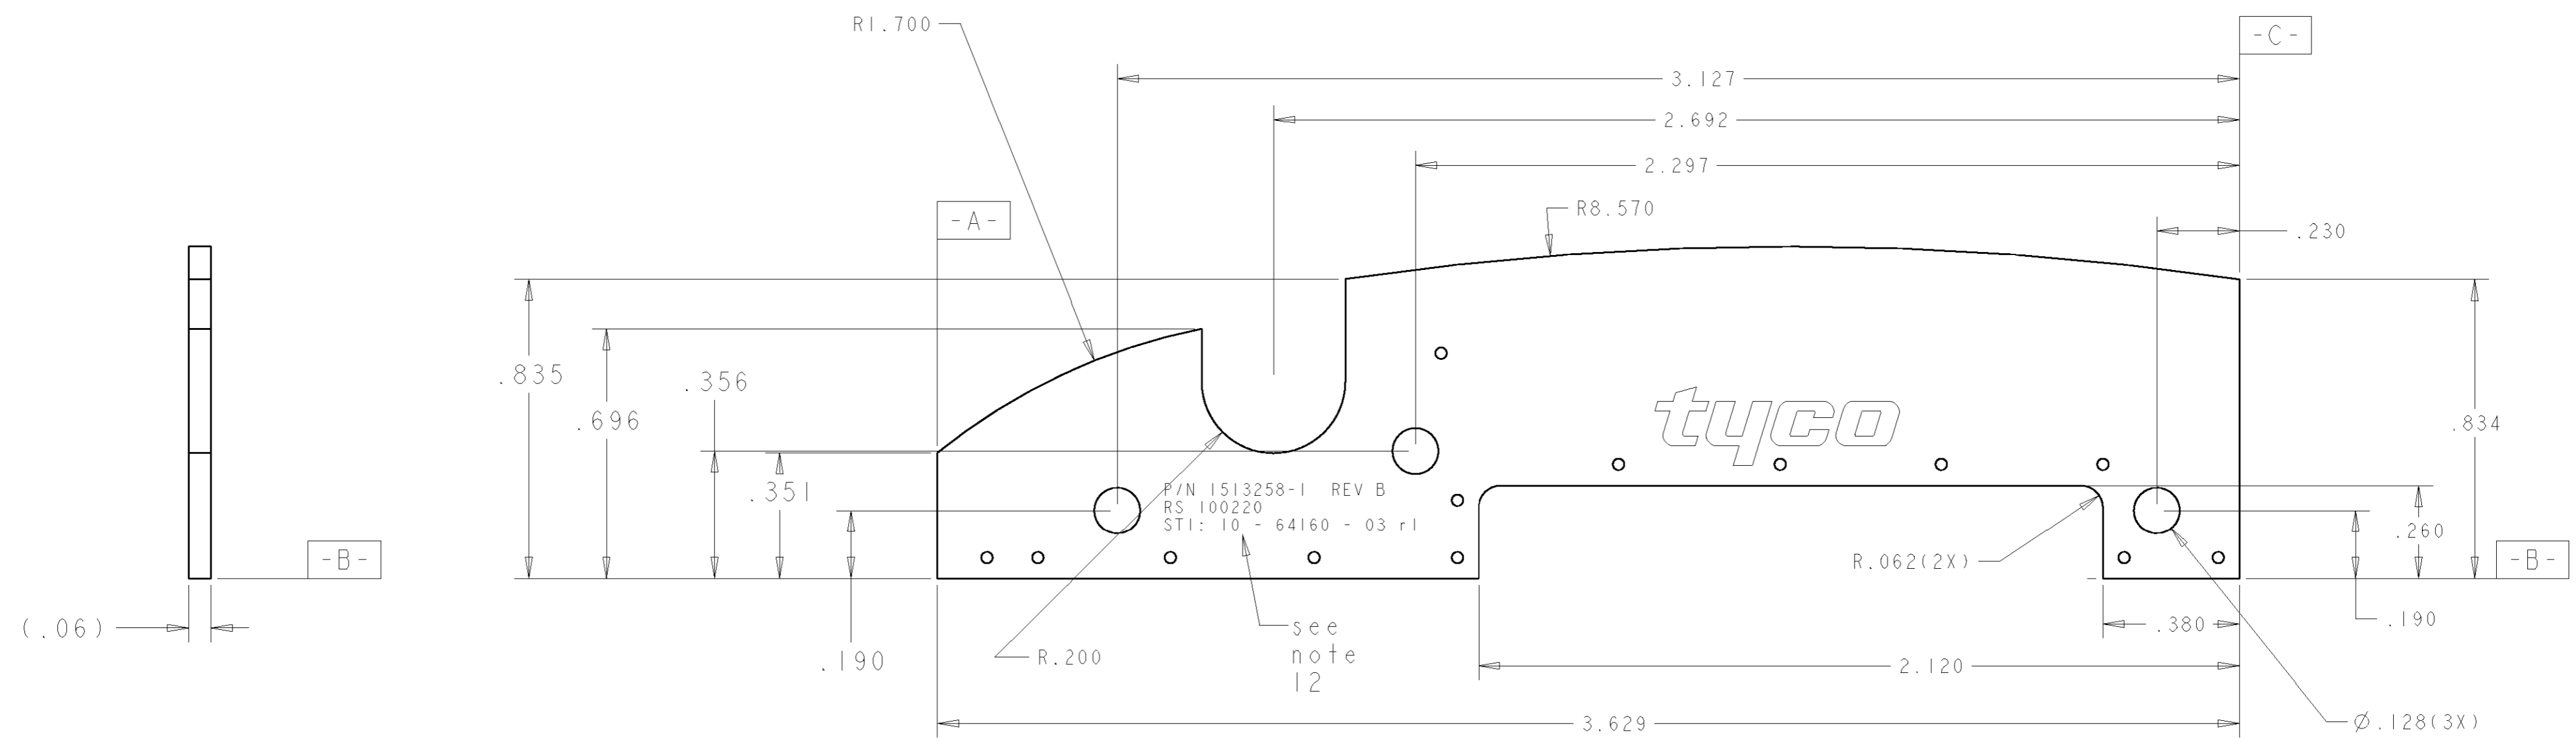


P/N 1513258-1 REV B
 RS 100220
 STI: 10 - 64160 - 03 r1



1513258-2
 SCALE 3:1

NOTES: UNLESS OTHERWISE SPECIFIED:

- FABRICATE TO MEET IPC - 6012, CLASS 2. INSPECT TO MEET IPC - A - 600, CLASS 2.
- PRIMARY SIDE (LAYER 1) SHOWN.
- MATERIAL: GETEK 8 PLY (7628) .059 THK. P/N ML200D, 1/2 OZ COPPER, BOTH SIDES. DIELECTRIC CONSTANT @ 1MHZ 4.2 ± 0.1.
- PLATING TO BE 1/2 OZ COPPER.
- FINISH:
 A: SOLDER MASK OVER BARE COPPER. (SMOBC).
 B: MASK BOTH SIDES OF PCB WITH LPI SOLDERMASK, SOLDERMASK COLOR: NATURAL GREEN.
 C: HASL.
- TOTAL BOARD THICKNESS INCLUDING PLATING, .062 ± .005mm.
- A: SILKSCREEN TO BE NON-WHITE EPOXY INK.
 B: SILKSCREEN VENDOR LOGO LAYER 2. DO NOT ETCH. MARKING MUST BE SILKSCREENED ONLY (LAYER 2) NO ADDED ETCH ALLOWED.
- TRACE WIDTH TO BE: EXACT DIMENSIONS AS ARTWORK. TOL. ± .001.
- LAYER TO LAYER REGISTRATION TO BE ± .005.
- DIMENSIONS ARE IN INCHES.
- REFER TO GERBER FILE: 100220_REVB_GERBERS.ZIP FOR PCB MANUFACTURE.

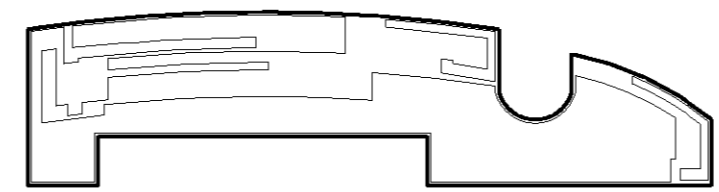

CIRCUIT LAYOUT FOR REFERENCE ONLY

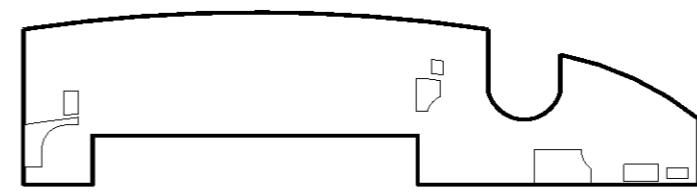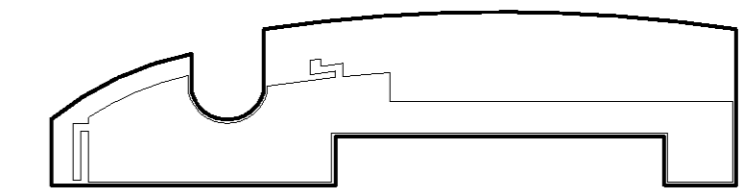


SOLDER MASK LAYOUT FOR REFERENCE ONLY


<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN D.JL	06DEC2004	tyco Tyco Electronics Electronics Rochester, New York 14623	
DIMENSIONS: INCHES		CHK -	-	NAME Symbol Aquarius Antenna Module	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.05 2 PLC ±.01 3 PLC ±.005 4 PLC ±.001 ANGLES ±° FINISH		APVD -	-	SIZE A200779	
MATERIAL -		PRODUCT SPEC -	-	DRAWING NO 1513258	
		APPLICATION SPEC -	-	RESTRICTED TO -	
		WEIGHT -	-	SCALE 1:1 SHEET 2 OF 3 REV B	
		CUSTOMER DRAWING			

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
HQ	00	-	-	SEE SHEET 1	-	-	-

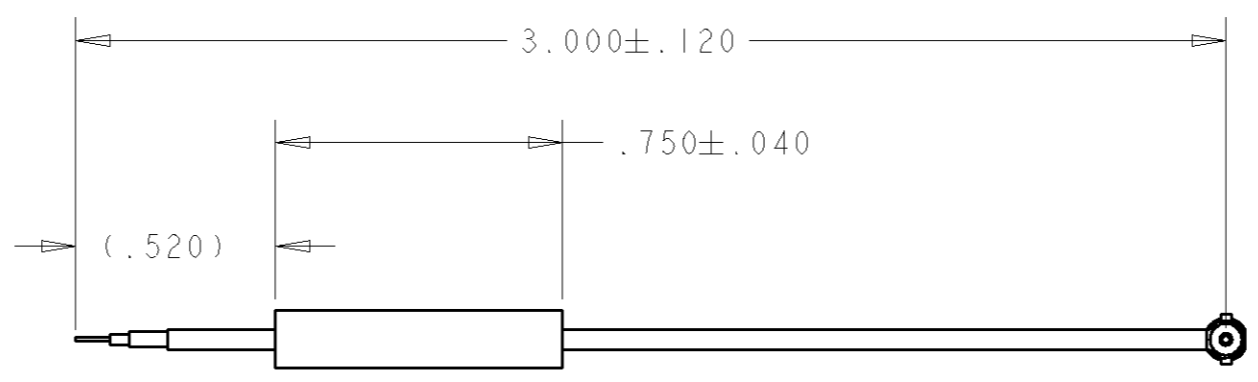

WLAN/BT SSMT CABLE ASSEMBLY
 SCALE 2:1

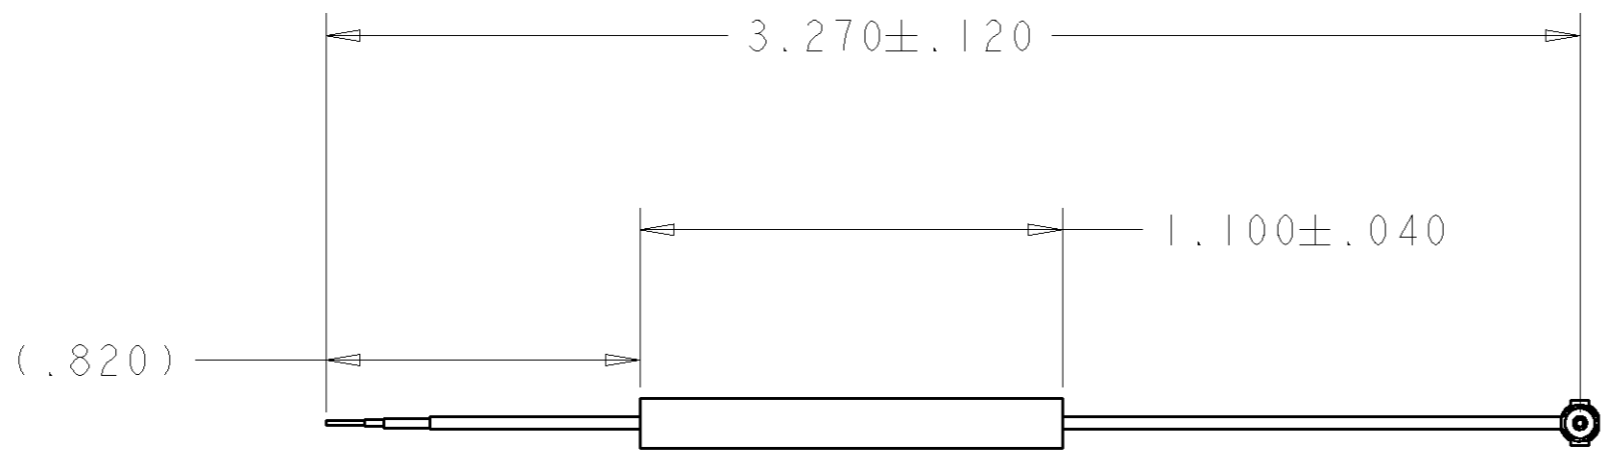

WLAN/BT GSC CABLE ASSEMBLY
 SCALE 2:1

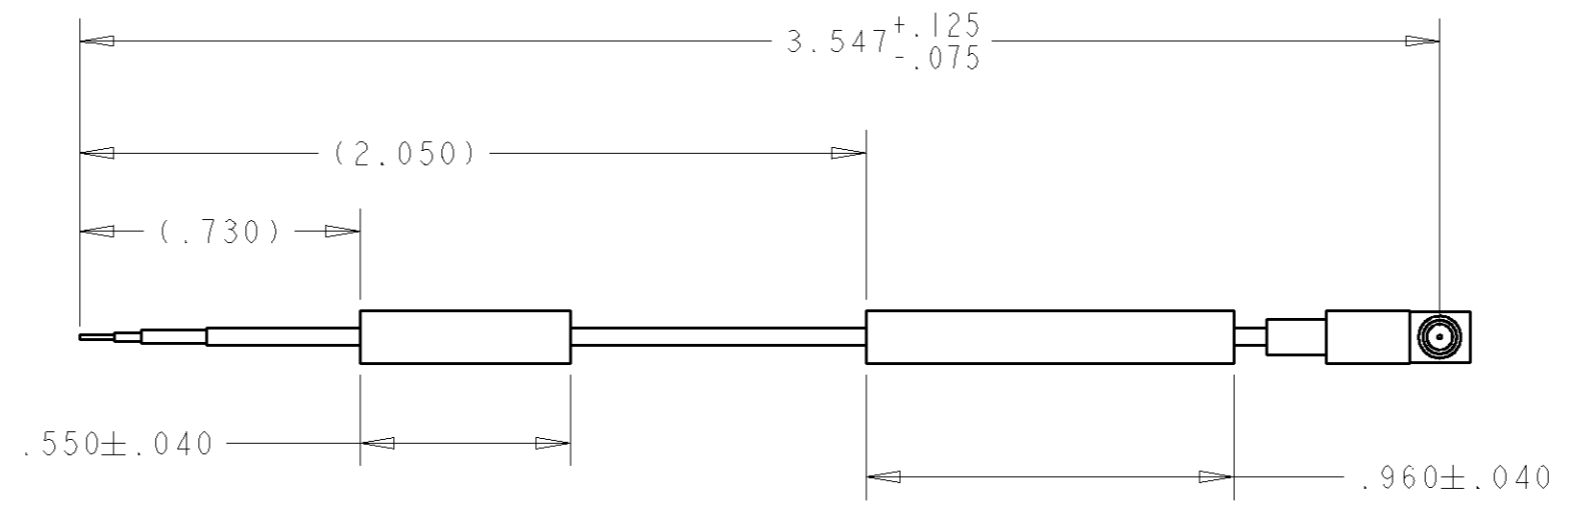

WWAN - MMCX CABLE ASSEMBLY
 SCALE 2:1

<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN 06DEC2004 CHK - APVD - PRODUCT SPEC - APPLICATION SPEC - WEIGHT - CUSTOMER DRAWING	tyco Electronics Tyco Electronics Rochester, New York 14623 NAME Symbol Aquarius Antenna Module SIZE CAGE CODE DRAWING NO RESTRICTED TO A200779 C-1513258 - SCALE 1:1 SHEET 3 OF 3 REV B
DIMENSIONS: INCHES 	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .1 1 PLC ± .05 2 PLC ± .01 3 PLC ± .005 4 PLC ± .001 ANGLES ±° FINISH	MATERIAL -	