## Style

M12 Plug, shielded 5 pin A-coding

Ratings Voltage: 60 V Current: 4 A

# **Operating Temperature Range**

-40~105 °C

### Materials

- 1 Insulator: Polyamide 66 (PA66), UL94 HB, black
  2 Pin: C5191 phosphor bronze, gold plated
  3 Shell: C3604 brass, nickel plated
  4 Nut: C3604 brass, nickel plated

- (5) O-ring: Nitrile rubber, black

## **Electrical Requirements**

Dielectric strength: 1 min @ 500 Vac Insulation resistance: 100 MΩ @ 500 Vdc Contact resistance:  $10 \text{ m}\Omega$  or less

## **Mechanical Requirements**


Life cycle: 500 mating cycles minimum

Environmental Requirements Salt spray test: 35 °C, relative humidity 90-95%, 5% NaCl mist for 48 hrs. Wash parts after test. Maintain mechanical requirements and a contact resistance of less than 10 m $\Omega$ . Waterproof: IP67

5

## **Assembly Info**

Wire gauge: 22 AWG max

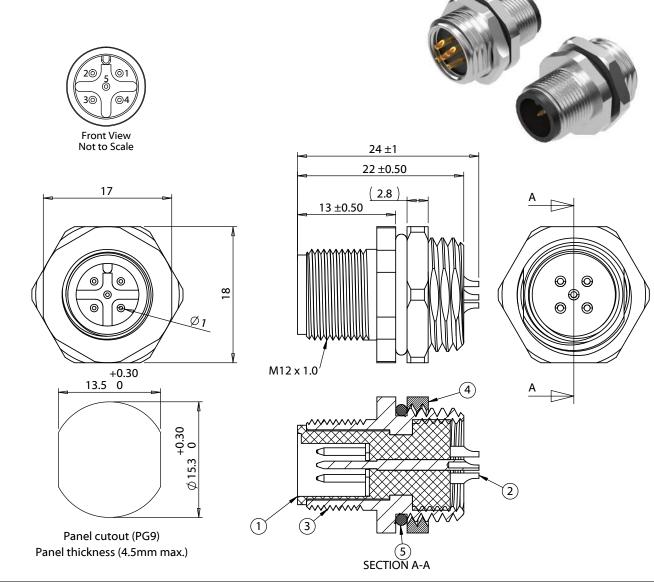

Revision:	Date:	Description:	Prepared:	Notes:				
А	10/1/2020	Initial release	Digitally signed by JC Date: 2020.10.23 14:45:31 -07:00'	RoHS compliant		Fľ	NSIL	ITY
			Verified: AG  Digitally signed by AG Date: 2020.1023 15:3038  Dimensions are in	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com			
			millimeters. Tolerances: X: ± 0.3 mm	Description: Connector, 5 pin M12 A-code plug, 12xL24mm, gold	Size:	e: Part number: 54-00189		
			X.X: ± 0.1 mm X.XX: ± 0.05 mm	plated, panel mount, solder cup, IP67	Scale:	2:1		Sheet 1 of 1