

Technical specification:


Rated voltage: IEC 61076-2-101	60 V
Current rating: IEC 61076-2-101	4A bei 40°C
Insulation resistance: IEC 60512	>=100 MΩ
Pollution degree: IEC 60664-1	3/2
Degree of protection: IEC 60529	IP 65, in mated condition
Temperature range: IEC 60664-1	-30°C ... +85°C
Mating cycles: IEC 60512-9a	>=100

Materials:

Contact:	CuZn
Contact plating:	Nickel, gold plated
Contact carrier:	PBT GF, UL 94
Sealing:	FPM
Body:	Thermoplastic Elastomer, RAL 9004

Installation specification:

Recommended torque:	0,6 Nm
---------------------	--------

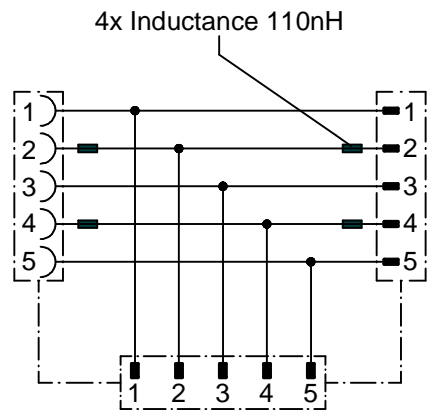

Part no:	Description:
43-11210	SAL - 12B - RS5 - RK5 - RS5

DO NOT ALTER CAD DRAWING BY HAND Directive 2002/95/EC RoHS compliant	Index: a 24.08.11 VF Ä3941 data sheet revised	dim. in mm	title: <h2 style="margin: 0;">Junction box, Profibus DP, M12x1</h2>								
	tolerance of cable:	<table border="1" style="font-size: 8px;"> <tr> <td>drawn</td> <td>30.10.07</td> <td>Mankopf</td> </tr> <tr> <td>appd.</td> <td>30.10.07</td> <td>Fromm</td> </tr> </table>	drawn	30.10.07	Mankopf	appd.	30.10.07	Fromm	dwg no: <h1 style="margin: 0;">43K1A563</h1>		
	drawn	30.10.07	Mankopf								
	appd.	30.10.07	Fromm								
general tolerance:	<table border="0" style="font-size: 8px;"> <tr> <td>0</td> <td>± 0,50mm</td> </tr> <tr> <td>0,0</td> <td>± 0,25mm</td> </tr> <tr> <td>0,00</td> <td>± 0,10mm</td> </tr> </table>	0	± 0,50mm	0,0	± 0,25mm	0,00	± 0,10mm	part no: <h2 style="margin: 0;">see table</h2>			
0	± 0,50mm										
0,0	± 0,25mm										
0,00	± 0,10mm										
THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH											