


# molex

**INSULATION DISPLACEMENT CABLE:**  
0.050" PITCH, 28 AWG, STRANDED EXTRUDED FEP

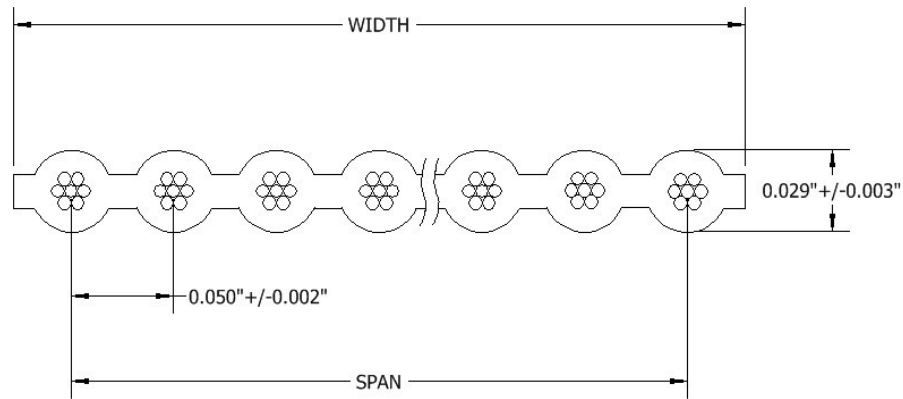

Cond. No.	Part Number	Span	Width
8	1000570393	0.350" ± 0.007"	0.400" ± 0.007"
10	1000570142	0.450" ± 0.007"	0.500" ± 0.007"
20	1000570163	0.950" ± 0.010"	1.000" ± 0.010"
26	1000570053	1.250" ± 0.010"	1.300" ± 0.010"
30	1000570181	1.450" ± 0.010"	1.500" ± 0.010"
34	1000570186	1.650" ± 0.010"	1.700" ± 0.010"

CHARACTERISTICS		
<b>Conductor</b>	28 AWG, 7/36, Silver Plated Copper	
<b>Insulation</b>	FEP	
<b>Color</b>	Red	
<b>Impedance (ohms)</b>	115 Unbalanced	165 Balanced
<b>Capacitance (pF/ft)</b>	10.5 Unbalanced	6.0 Balanced
<b>Inductance (uH/ft)</b>	0.14 Unbalanced	0.16 Balanced
<b>Insulation Resistance (Mohm)</b>	>500	
<b>Voltage Rating</b>	300V	
<b>Temperature Rating</b>	-55°C to 200°C	

**STANDARD PACKAGING**

100 ft./spool, 10 Ft. minimum length

**UL STYLE 20424**