




All rights strictly reserved. Reproduction or issue to third parties in any form or by any means, without written authority from the proprietor, is prohibited. Property of BERG ELECTRONICS. Copyright BERG ELECTRONICS by




Tous droits strictement reserves. Reproduction ou communication de des tiers int sans aucune forme ou par quelque moyen que ce soit sans autorisation écrite du propriétaire. propriété de c BERG ELECTRONICS. Droits de reproduction BERG ELECTRONICS by

PRODUCT NO	CONDUCTOR POS NO	CONDUCTOR ASSY POS NO	CONTACT PLATING	HOUSING COLOR
67968-001	6/4	2,3,4,5	15u" AU	GRAY
67968-001LF			15u" AU	GRAY
67968-002	6/6	1,2,3,4,5,6	15u" AU	GRAY
67968-002LF				


LEAD FREE PRODUCT NO.

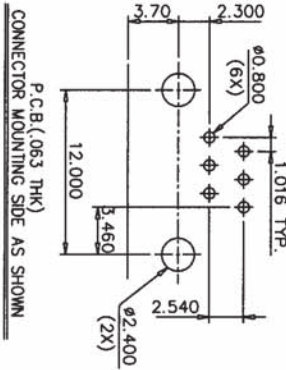

P.C.B.(.063 THK)
CONNECTOR MOUNTING SIDE AS SHOWN

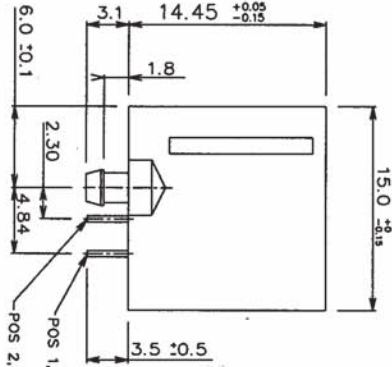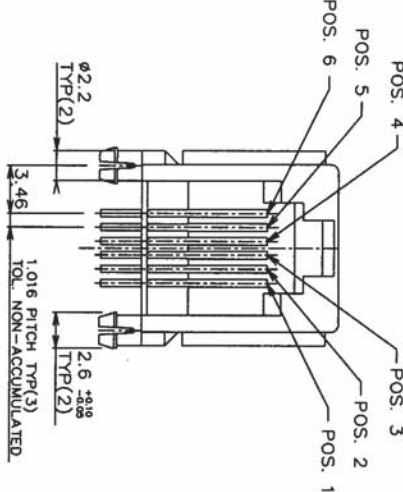

POS 1,3,5 CONDUCTOR (LONG)
POS 2,4,6 CONDUCTOR (SHORT)

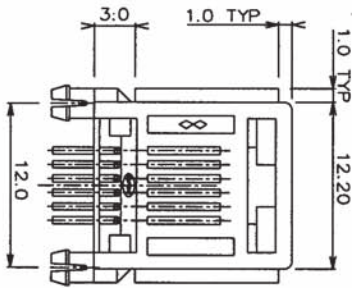

- NOTE:
- FOR VISUAL, MECHANICAL AND FUNCTIONAL REQUIREMENTS SEE PRODUCT SPEC. 110-015.
 - ZYTEL-FR50, UL 94 V-0.
 - GOLD WIRE MATL: PHOSPHOR BRONZE 0.46 DIA.
 - A. STANDARD PACKAGING METHOD(USE TRAY): SEE GS-14-351.
B. NON-STANDARD PACKAGING METHOD(USE TUBE): SEE GS-14-358.
THE PART NO. SHOULD BE SUFFIXED WITH "T" OR "TLF".
(E.G.67968-001T OR 67968-001TLF)
 - MATABLE PLUG: PLUG CONFORMED TO FCC TYPE 623.
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.6mm MINIMUM THICK CIRCUIT BOARD.
 - IF LF P/N PACKAGING MEETS GS-14-920 SPECIFICATION.

rev. ecn no	dr	date	lineor	tolerance unless otherwise specified	CUSTOMER COPY	projection	title	product family	mod jack	code
H		11/02/98		0.0 ± 0.25			LOW PROFILE 6POS PCB MOD JACK			TWN
J		07/15/98		0.00 ± 0.05						
K		07/22/98		±.2						
L		10/28/98								
M		07/25/99								
sheet revision M										
index sheet 1										

PDM: Rev:M STATUS:Released Printed: Mar 09, 2007