MICRO SWITCH
FREEPORT ILLINOIS, U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY
PUSHBUTTON SWITCH

CATALOG LISTING
701PB916

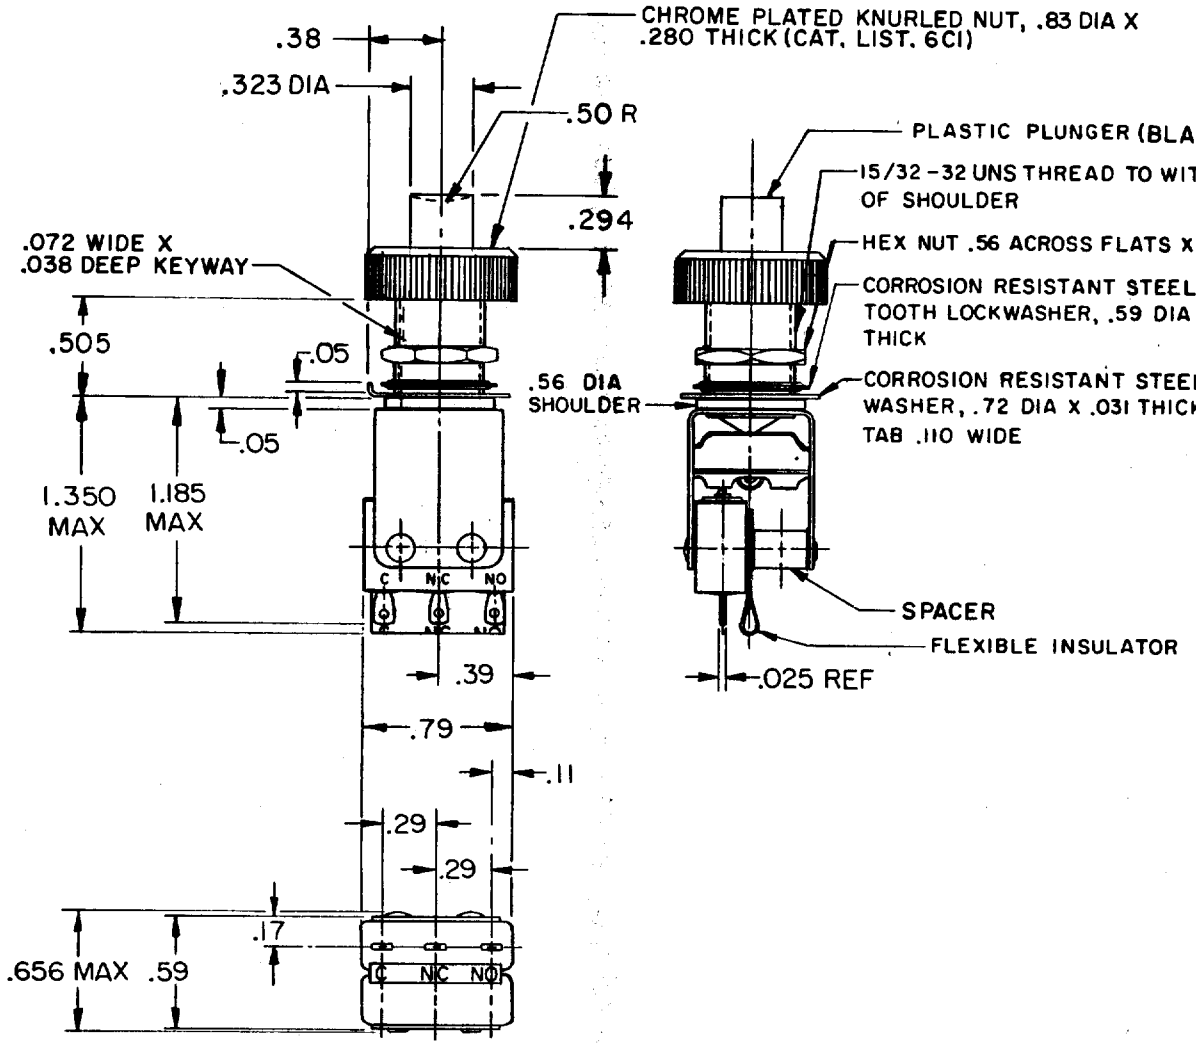

NOTE
1 - UNIT INCLUDES "HM TYPE" BASIC SWITCH
2 - TERMINALS ARE PLATED FOR SOLDERING
3 - GOLD PLATED CONTACTS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

OPERATING FORCE - - - - 30 OZ APPROX

TOTAL TRAVEL - - - - - - - .100 APPROX

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

28 VOLTS DC RATING
INDUCTIVE - - - - SEA LEVEL - - 1/4 AMP
70,000 FT - - 1/4 AMP
RESISTIVE - - - - SEA LEVEL - - - 1 AMP
70,000 FT - - - - 1 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

DESIGN UNITS — SI METRIC ☐ — US CUSTOMARY ■

WEIGHT .043 LB APPROX

DRAWN T M 23 MAR 83 — CHECK — CHECK — CHECK — CHECK

FO-52848-A

ISSUE 3 — DRAWING NUMBER M 701PB916 — RELEASE NO. PR-12026 — REPLACES

REVISIONS

A	PR 12026	
T	M	M
23	MAR	83