

6

5

4




3

2

1

MATERIAL NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300500503	ENS3335M010	3' 3" +2.19"/-0" [1M +55.6/-0 mm]
1300500437	ENS3335M050	16' 4" +6.50"/-0" [5M +165.1/-0 mm]

AUX VIEW
SCALE 1:4

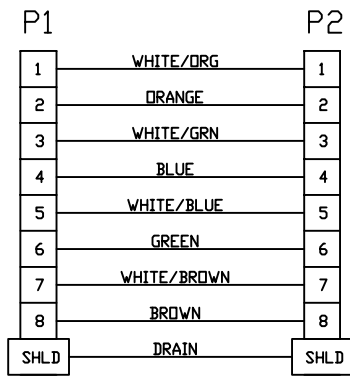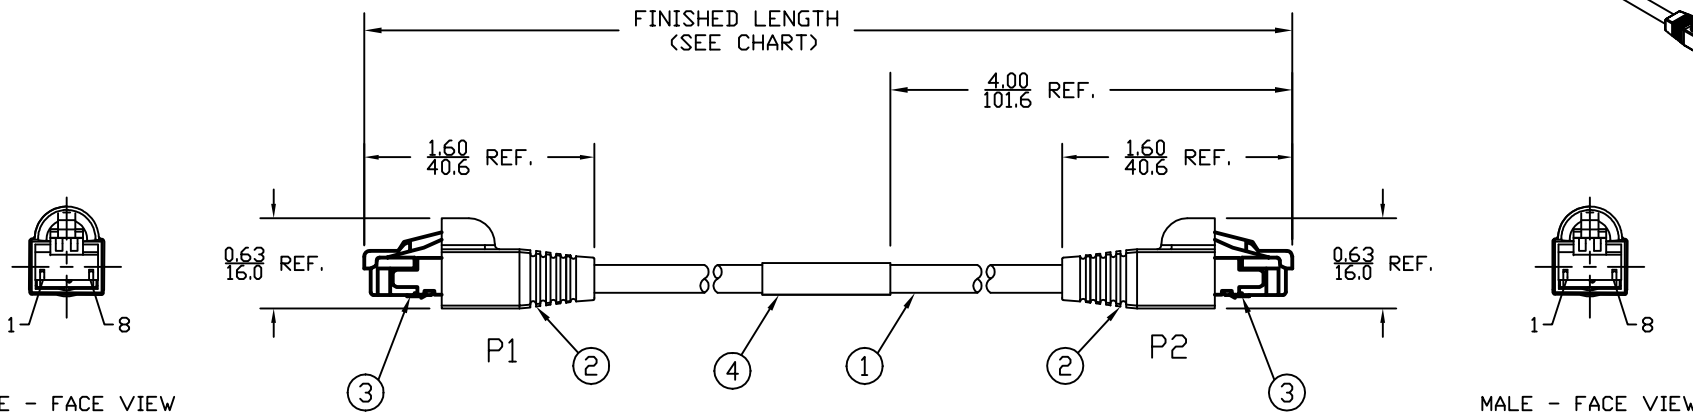

WIRING DIAGRAM

- NOTES:
- 1) MATERIAL: SEE TABLE
 - 2) FINISHES: SEE TABLE
 - 3) CABLE: #24/8 SHIELDED TWISTED PAIR, PUR
 - 4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A
 - 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO +75°C
 - 6) WRAP LABEL IS MARKED WITH P/N & DATE CODE.
 - 7) ASSEMBLY IS RoHS COMPLIANT.

ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
4	1	LABEL	PLASTIC FILM	BLACK/YELLOW
3	2	RJ45 PLUG	POLYCARBONATE	CLEAR
2	2	BOOT	PVC	BLACK
1	1	ETHERNET CABLE-CAT5E	PUR JACKET	BLACK

SD RELEASE EC NO: WNA2010-0016 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/08/10	7/23/09 DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION																							
		$\nabla=0$ $\nabla C=0$	<table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>±----</td> <td>±----</td> </tr> <tr> <td>3 PLACES</td> <td>±----</td> <td>±.005</td> </tr> <tr> <td>2 PLACES</td> <td>±----</td> <td>±.010</td> </tr> <tr> <td>1 PLACE</td> <td>±----</td> <td>±.020</td> </tr> </tbody> </table>		mm	INCH	4 PLACES	±----	±----	3 PLACES	±----	±.005	2 PLACES	±----	±.010	1 PLACE	±----	±.020	<table border="1"> <thead> <tr> <th>IN/MM</th> <th>DATE</th> </tr> </thead> <tbody> <tr> <td>VOU</td> <td>2009/07/15</td> </tr> <tr> <td>BWOODMAN</td> <td>2009/07/31</td> </tr> </tbody> </table>	IN/MM	DATE	VOU	2009/07/15	BWOODMAN	2009/07/31	<table border="1"> <thead> <tr> <th>TITLE</th> <th>MOLEX</th> </tr> </thead> <tbody> <tr> <td>ETHERNET CABLE ASSY 8P M/M STD/STD 568B #24/8 SHIELDED CABLE</td> <td>MOLEX INCORPORATED</td> </tr> </tbody> </table>	TITLE	MOLEX	ETHERNET CABLE ASSY 8P M/M STD/STD 568B #24/8 SHIELDED CABLE	MOLEX INCORPORATED
			mm	INCH																										
		4 PLACES	±----	±----																										
3 PLACES	±----	±.005																												
2 PLACES	±----	±.010																												
1 PLACE	±----	±.020																												
IN/MM	DATE																													
VOU	2009/07/15																													
BWOODMAN	2009/07/31																													
TITLE	MOLEX																													
ETHERNET CABLE ASSY 8P M/M STD/STD 568B #24/8 SHIELDED CABLE	MOLEX INCORPORATED																													
	ANGULAR ±1/2°	MATERIAL NO.	DOCUMENT NO.	SHEET NO.																										
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE CHART	SD-130050-009	1 OF 1																										
1	REV	SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																											

6

5

4

3

2

1

E

E

D

D

C

C

B

B

A

A