

—	L G	п	m		0
				_	



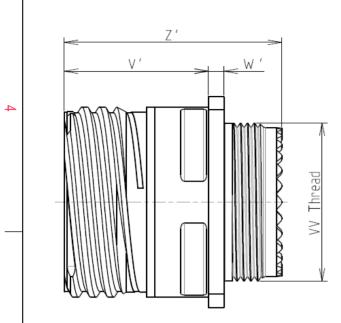

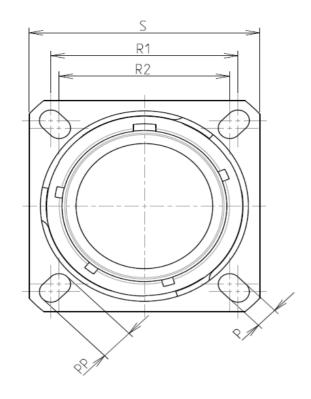

Keying Shown as example

CHARACTERISTICS

BASIC SERIES:

SHELL SIZE : 13

Н


ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

	-Shell Material	: Composite		
	-Shell Plating	: Olive drab Cadmium		
	-Insulator	: Thermoplastic		
	-Contacts	: Copper Alloy		
	-Seals & Grommet	: Silicon Elastomer		
	-Contact Plating	: Gold over copper Alloy 0.8µm minimum		
	-Durability	: 500 Mating cycles		
-Delivered without Souriau contacts				
	-Temperature Range	: -65°C to +175°C		
	-Salt Spray	: 2000 hours		

Dim	Nominal
Р	3.25±0.2
PP	4.93±0.2
R1	23.01
R2	20.62
S	28.6±0.3
V'	19.5+1.4/-0
W'	2.1/3.65
Z'	32 Max
VV THREAD	M18x1-6g

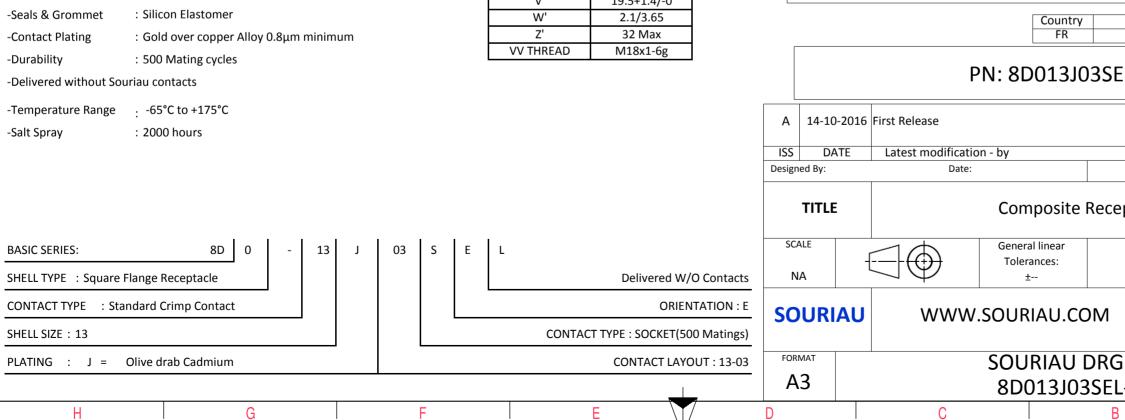

0		Φ	A			
					4	
LAY	YOUT SHOWN AS EXA	MPLE			3	
SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)						
PN: 8D013J03SEL						
First Release Latest modificatio	n - by			MOD N°		
Date:			CUSTOMER DRAWING			
	Composite I	Receptac	e 8D series			
$\exists \bigoplus$	General linear Tolerances: ±		NPRDS / PROJECT 859		1	
WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
			SHEET 1/2			
С		B	A	1	J	

	工	G	п П	m	D	0	
		Contact Layout				Ρ	Panel Cutou
4		03 ())) 3#16			2	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING	
	Ctc A B C	13-03 X Y 2.39 1.47 0 -2.79 -2.39 1.47				ØA Dim	ØT_
ω						ØA ØAA R1 ØT	
	-					SOURIAU shall not be lia due to a use of the Pr the Specifications issued b (professional reco	roducts wh by either of
N							Countr FR
					A 14-10	-2016 First Release	D013J
					ISS DA Designed By:	TE Latest modification - by Date:	
					SCALE	Gene	mposite eral linear erances:
→					NA SOURI		±
					FORMAT A3		JRIAU 0013J0
L	Н	G	F	E	D	С	

