

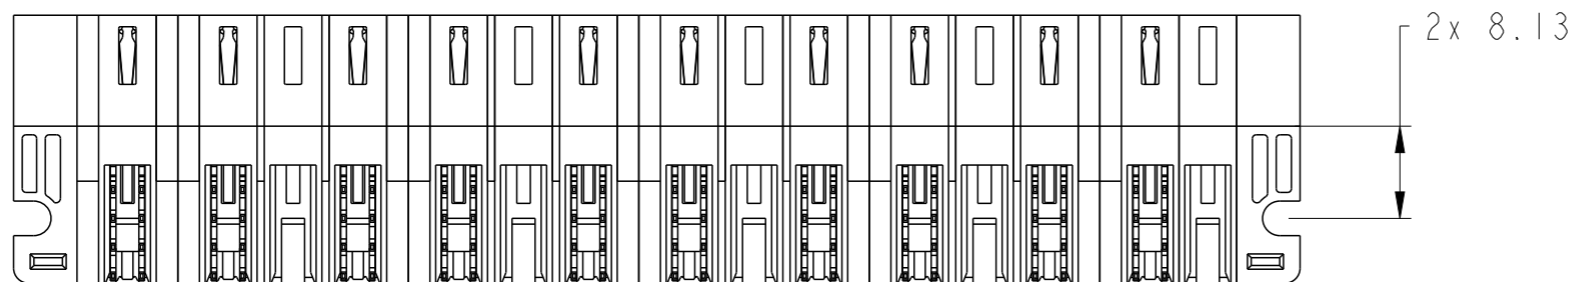
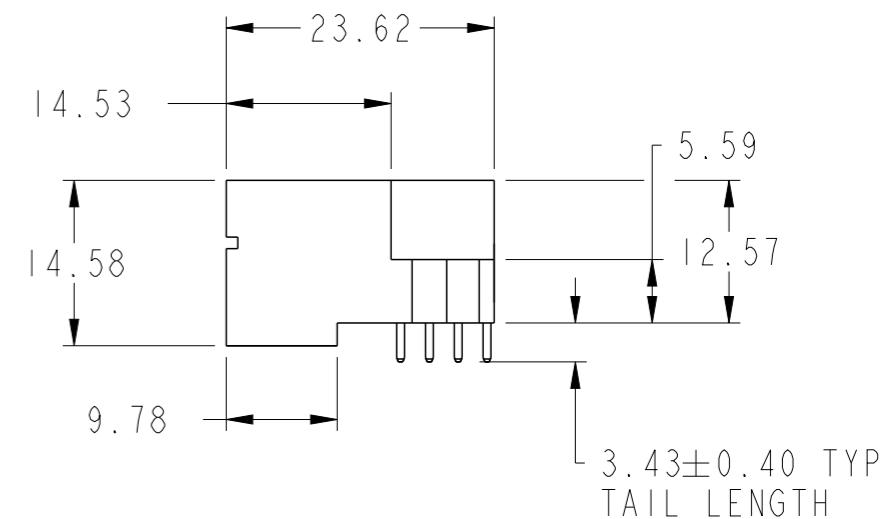
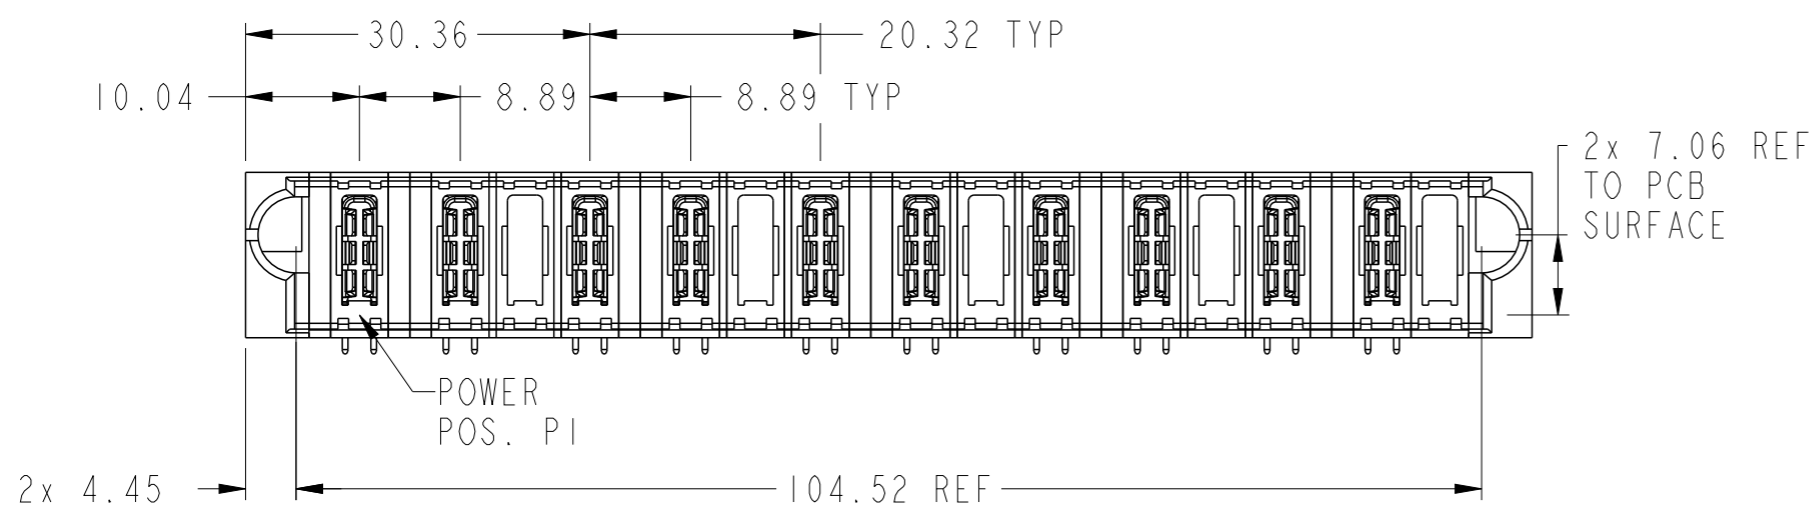


PRODUCT NUMBER SEE SHEET 2

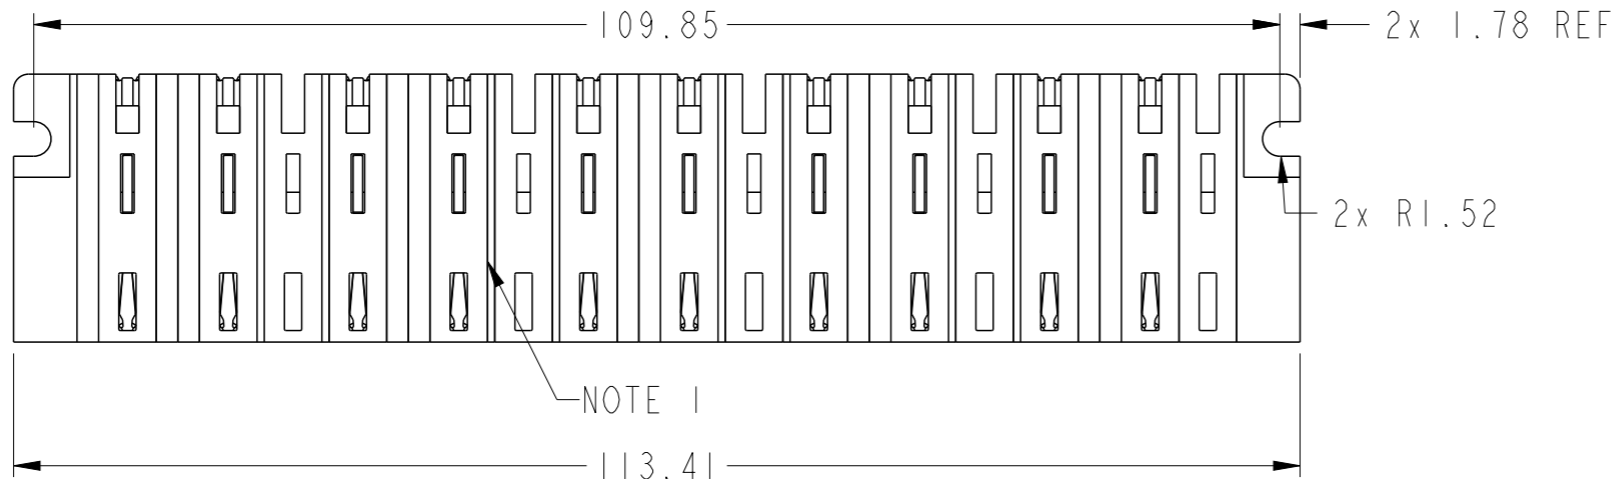

spec ref	*	dr	Zhan Rainbow	2017/09/19	projection	MM	size	A3	scale	3:2	
tolerance std	ISO 406 ISO 1101	eng	Zhan Rainbow	2017/09/27			ecn no	-	rel level	Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Kaka Zhang	2017/09/27							
surface	linear	appr	Pei-Ming Zheng	2017/09/27	product family	PwrBlade+	rel level	Released	dwg no	10106262-F000002	
ISO 1302	angular	0°	±0.5	±0.25	±0.10	www.fci.com	cat. no.	15ACP	RA STB PLUG	rev	A
Product - Customer Drw							sheet 1 of 3				

PRODUCT NO.	ROWS	HIGH POWER															
		E1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
10106262-F000002LF	DCBA																

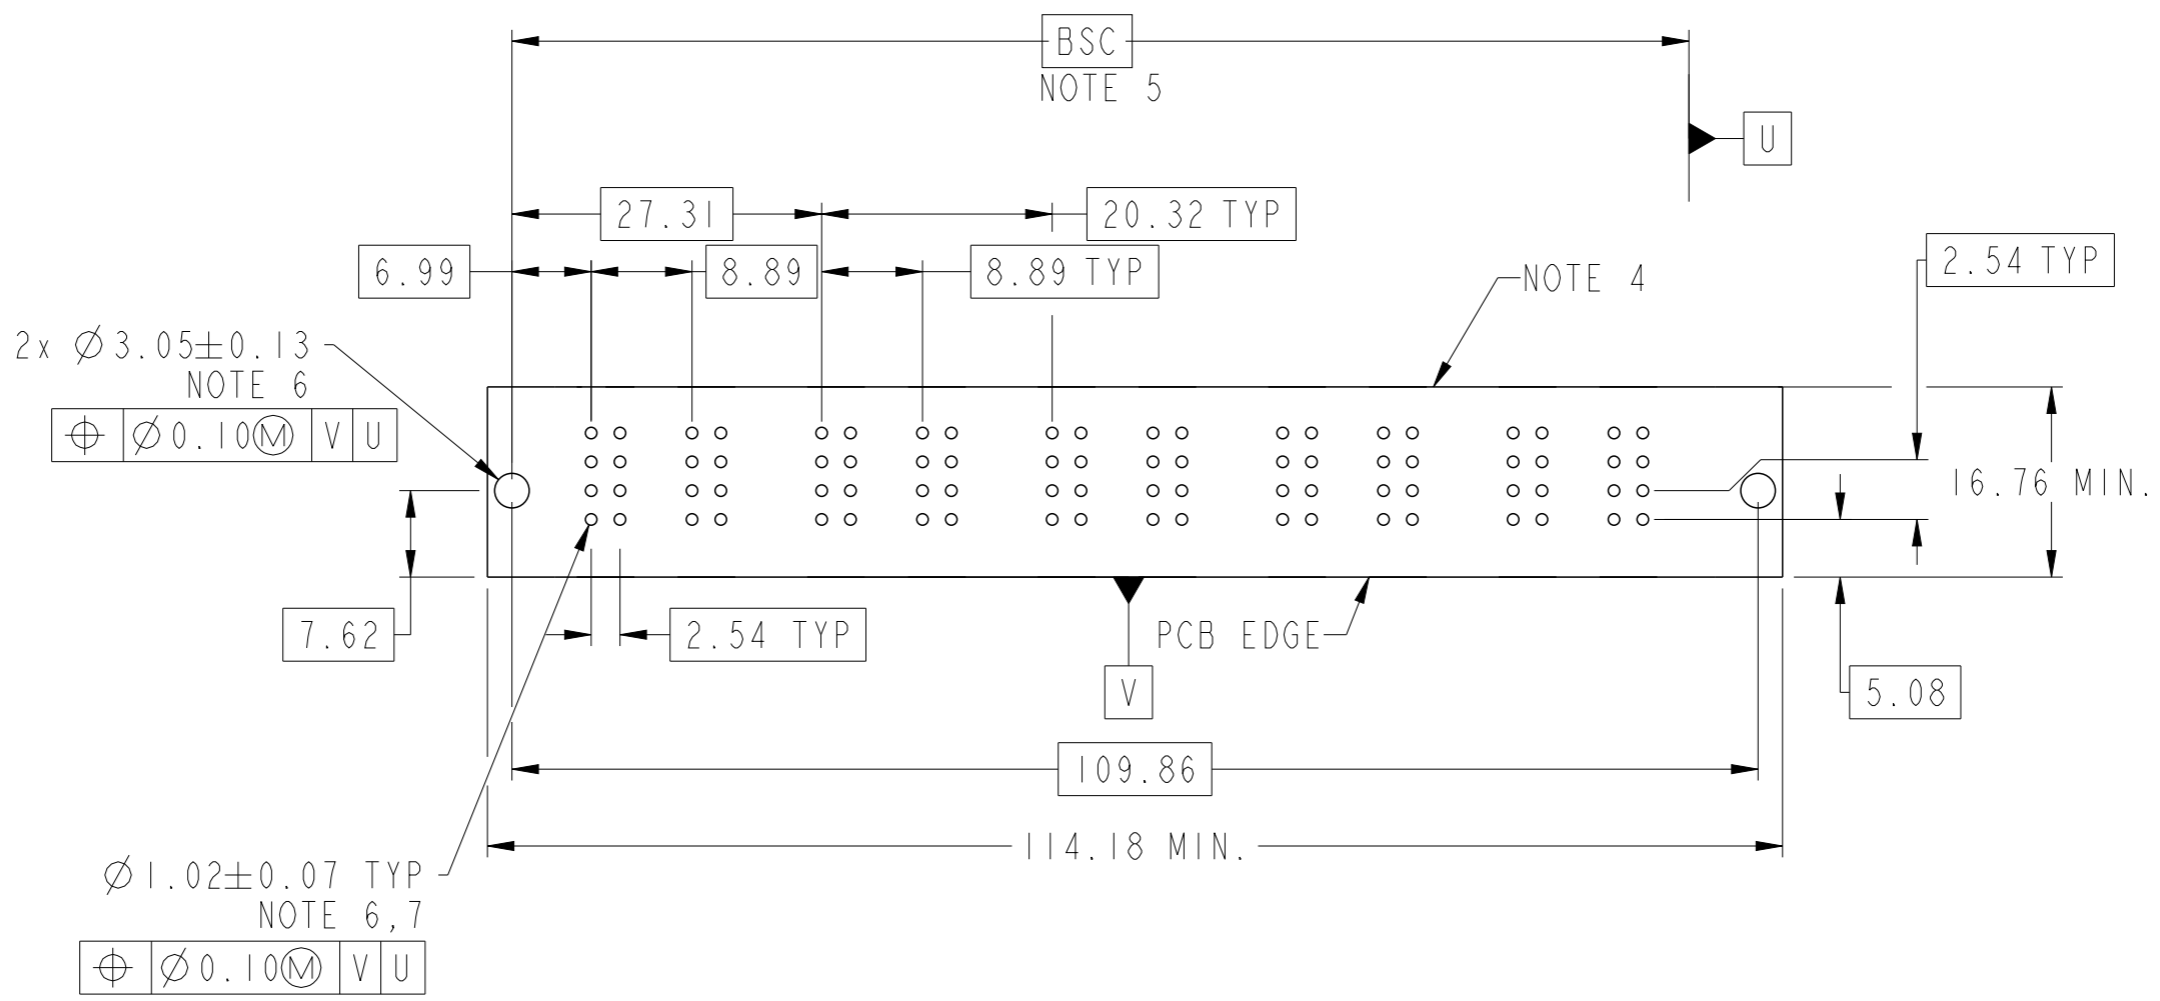

CODE	DESCRIPTION
HI	STD HIGH POWER CONTACT (3.43)
X	OMITTED

spec ref	*	dr	Zhan Rainbow	2017/09/19	projection	MM	size	A3	scale	3:2	
tolerance std	ISO 406 ISO 1101	eng	Zhan Rainbow	2017/09/27		← →	ecn no	-	rel level	Released	
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Kaka Zhang	2017/09/27							
surface	linear	appr	Pei-Ming Zheng	2017/09/27	product family	PwrBlade+					
ISO 1302	angular	Amphenol FCI		15ACP	RA STB PLUG		dwg no	10106262-F000002		rev	A
		www.fci.com		cat. no.	Product - Customer Drw			sheet 2 of 3			

Amphenol FCI

© 2016 AFCI

NOTES:

- 1) PRODUCT MARK:
PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE .
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
-HOUSING : HIGH TEMP THERMOPLASTIC WITH GLASS FIBER, UL94V-0, BLACK.
-POWER CONTACT : HIGH CONDUCTIVITY COPPER ALLOY.
-SIGNAL CONTACT : COPPER ALLOY.
- 3) PLATING SPECIFICATION : 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS ARE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15+/-0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN SN
OVER 0.0254-0.0762MM CU PLATING TO ACHIEVE A 1.02+/-0.07MM HOLE.
- 8) THE HOUSING WILL WITHSTAND EXPOSURE TO 265 °C PEAK TEMPERATURE
FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- 9) THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY
REGULATIONS AS DESCRIBED IN GS-47-0004.
- 10) PRODUCT SPECIFICATION : GS-12-658.
APPLICATION SPECIFICATION : GS-20-141.
PRODUCT PACKAGE SPECIFICATION: GS-14-1502.

Amphenol
FCi

© 2016 AFCI

spec ref *		dr	Zhan Rainbow	2017/09/19	projection 	MM ←→	size	A3	scale	3:2
tolerance std ISO 406 ISO 1101		eng	Zhan Rainbow	2017/09/27			ecn no	-		
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	Kaka Zhang	2017/09/27			rel level	Released		
surface ISO 1302	linear	0.X	±0.5	Amphenol FCi	15ACP	dwg no 10106262-F000002	rev A			
		0.XX	±0.25							
		0.XXX	±0.10							
	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw	sheet 3 of 3			