


SMD Power Inductor CDRH38D16R/LD

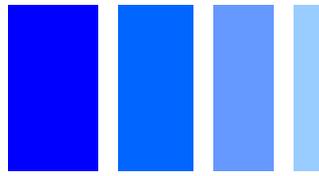

Description

- Ferrite drum core construction.
- Magnetically shielded.
- L × W × H: 4.2 × 3.95 × 1.8 mm Max.
- Product weight: 85mg(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Environmental Data

- Operating temperature range: -40°C ~ +105°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +105°C
- Solder reflow temperature: 260 °C peak.


Packaging

- Carrier tape and reel packaging
- 13.0" diameter reel
- 3000pcs per reel


Applications


- Ideally used in Mobilephone, PDA, MP3, DSC/DVC, HDD, etc as DC-DC converter inductors .

Dimension - [mm]

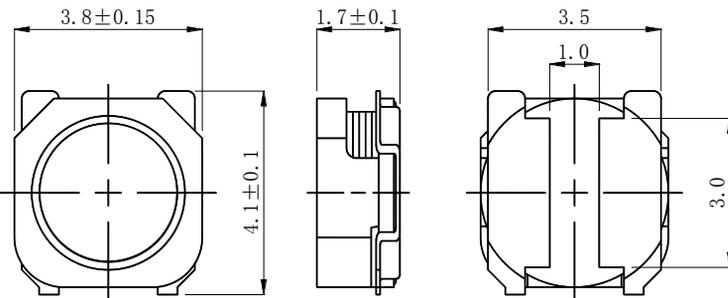

Land pattern and Schematics - [mm]

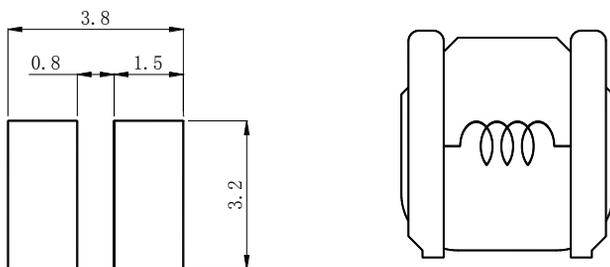

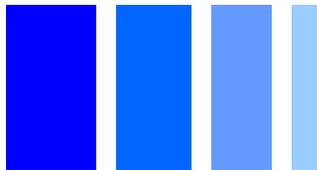

Electrical Characteristics

Part No.	Stamp	Inductance (μH) [Within] ※1	D.C.R. ($\text{m}\Omega$) [Within] (at20°C)	Saturation current (A) ※2		Temperature rise Current (A) ※3
				(at20°C)	(at100°C)	
CDRH38D16RLDNP-R90NC	A	0.90±30%	18±25%	1.54	1.31	3.80
CDRH38D16RLDNP-1R6NC	B	1.6±30%	25±25%	1.14	0.99	3.15
CDRH38D16RLDNP-2R2NC	C	2.2±30%	30±25%	1.01	0.88	3.00
CDRH38D16RLDNP-3R3MC	D	3.3±20%	37±25%	0.81	0.70	2.60
CDRH38D16RLDNP-4R7MC	E	4.7±20%	55±25%	0.69	0.59	2.00
CDRH38D16RLDNP-6R8MC	F	6.8±20%	75±25%	0.56	0.49	1.75
CDRH38D16RLDNP-100MC	G	10±20%	104±20%	0.47	0.40	1.45
CDRH38D16RLDNP-150MC	H	15±20%	163±20%	0.36	0.32	1.13
CDRH38D16RLDNP-220MC	J	22±20%	248±20%	0.32	0.28	0.90
CDRH38D16RLDNP-330MC	K	33±20%	351±20%	0.26	0.23	0.75
CDRH38D16RLDNP-470MC	L	47±20%	490±20%	0.22	0.19	0.65
CDRH38D16RLDNP-680MC	M	68±20%	867±20%	0.18	0.15	0.45
CDRH38D16RLDNP-101MC	N	100±20%	1335±20%	0.15	0.12	0.35

※1. Measuring condition: at 100kHz.

※2. Saturation current: The value of D.C. current when the inductance decreases to 70% of it's nominal value.


※3. Temperature rise current: The value of D.C. current when the temperature rise is $\Delta t=40^\circ\text{C}$ ($T_a=20^\circ\text{C}$).

SMD Power Inductor CDRH38D16R/LD




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

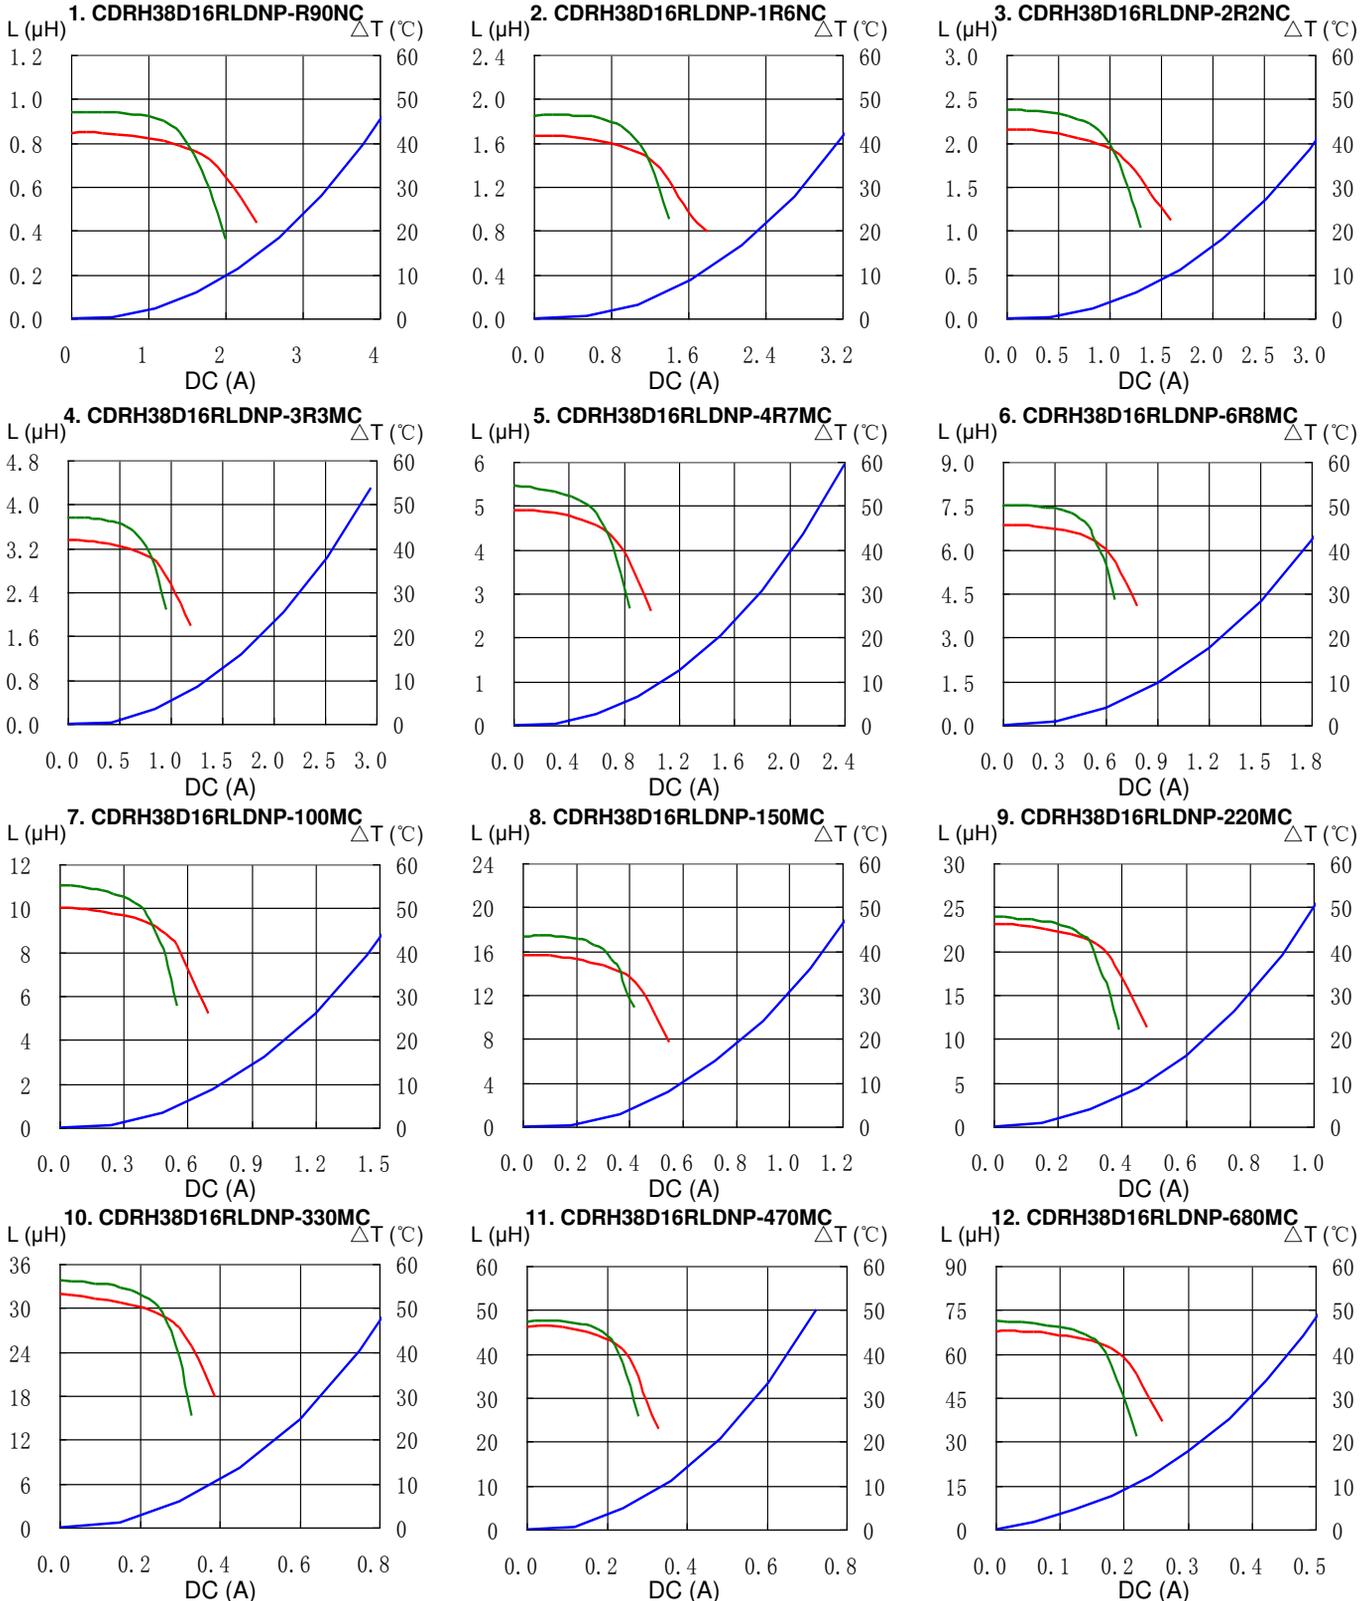


SMD Power Inductor CDRH38D16R/LD

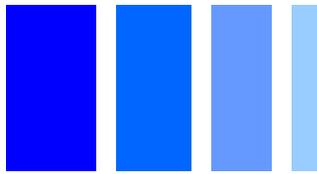


Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

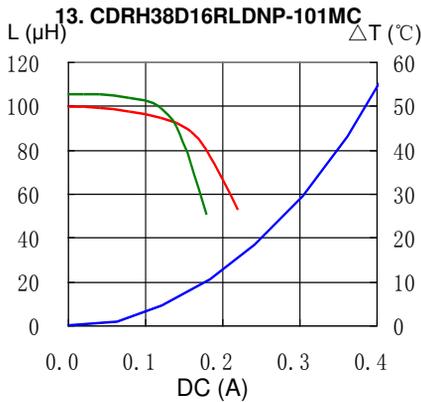


Solder Reflow Condition

Heat Endurance

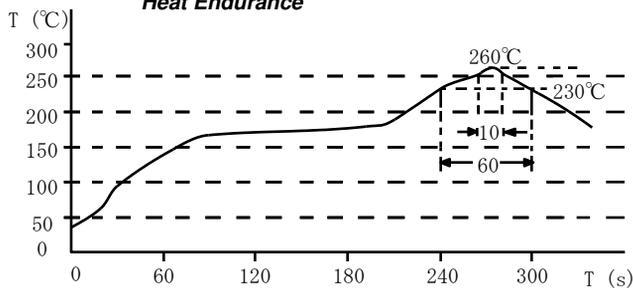

Temperature Chart

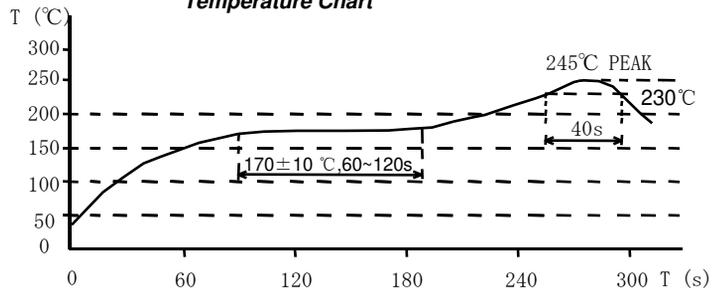

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6781
FAX. +852-2565-9600
sales@hk.sumida.com

Saitama(Japan)

Tel. +81-48-691-7300
FAX. +81-48-691-7340
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-21-5836-3299
FAX. +86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Obernzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6841-4426
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com