

IOLAN STG Secure Terminal Servers

 perle.com/products/iolan-stg-terminal-server.shtml

Serial to Ethernet Terminal Server

- 4 or 8 serial RS232 on RJ45 Ports
- 10/100/1000 Ethernet
- Small compact size
- Wall, desk or DIN Rail mounting
- Advanced security feature set



Engineers and Project Managers that require a cost effective 4 or 8 port serial **RS232-to-Ethernet** solution that maintains serial device protocol integrity across Ethernet must consider the IOLAN STG. Having the highest performance processor available along with the Perle's unique TrueSerial™ technology, the IOLAN STG will provide the most authentic serial connections across Ethernet. IOLAN STG4-P Serial Terminal Servers are also available with support for Power over Ethernet (PoE).

IOLAN STG Secure Serial Terminal Servers are ideal for:

- Engineers and Project Managers requiring a high performance serial to Ethernet interface for up to 4 or 8 serial RS232 based devices. Connect to serial based applications over Ethernet
- Compact size offers the smallest 4 or 8 port serial to Ethernet solution on the market

Why IOLAN STG Secure Terminal Servers are the preferred choice:

- High performance processors for the best throughput available. Ideal for time sensitive applications
- Compact size offers the smallest 4 port serial to Ethernet solution on the market
- Next Generation IP support (IPv6) for investment protection and network compatibility
- TrueSerial™ packet technology – the most authentic serial connections across Ethernet ensures serial protocol integrity
- Primary/Backup host functionality enables automatic connections to alternate hosts should the primary TCP connection go down
- EasyPort Web – Access equipment serial console ports by using your java-enabled Internet browser
- TruePort – Perle's com/tty redirector for serial based applications operates on Windows, Vista, Linux, Solaris, SCO and Unix
- Clustering – Provides a single view of all out of band console ports. Ideal for large data centers
- FIPS 140-2 – Cryptographic modules meet US Government NIST compliancy
- Dynamic DNS – Easy console management access from anywhere on the Internet
- Intelligent Power cycling of equipment with Perle Remote Power Switches
- Java-free browser access to remote serial console ports via Telnet and SSH
- Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear
- Lifetime warranty – best investment protection available

Software Features - IOLAN STG Serial Terminal Servers

Serial Port Access

Connect directly using Telnet / SSH by port and IP address

Connect with EasyPort menu by Telnet / SSH

Use an internet browser to access with HTTP or secure HTTPS via EasyPort Web menu

Java-free browser access to remote serial console ports via Telnet and SSH

Ports can be assigned a specific IP address (. aliasing.)

Multisession capability enables multiple users to access ports simultaneously

Multihost access enables multiple hosts/servers to share serial ports

Accessibility

In-band (Ethernet) and out-of-band (dial-up modem) support

Dynamic DNS enables users to find a console server from anywhere on the Internet

Domain name control through DHCP option 81

IPV6 and IPV4 addressing support

Availability

Primary/Backup host functionality enables automatic connections to alternate host(s)

Security

SSH v1 and v2

PCI DSS Compliance: TLS v1.2, TLS v1.1, TLS v1.0, SSL v3.0, SSL v2.0

SSL Server and SSL client mode capability

SSL Peer authentication

IPSec VPN : NAT Traversal, ESP authentication protocol

SSH ciphers: AES-CTR, AES-GCM and ChaCha20-poly1305

SSL encryption: AES-GCM, key exchange ECDH-ECDSA, HMAC
SHA256, SHA384

Encryption: AES (256/192/128), 3DES, DES, Blowfish, CAST128,
ARCFOUR(RC4), ARCTWO(RC2)

Hashing Algorithms: MD5, SHA-1, RIPEMD160, SHA1-96, and MD5-96

Key exchange: RSA, EDH-RSA, EDH-DSS, ADH

X.509 Certificate verification: RSA, DSA

Certificate authority (CA) list

Local database

RADIUS Authentication, Authorization and Accounting

TACACS+ Authentication, Authorization and Accounting

LDAP, NIS, Kerberos Authentication

RSA SecureID-agent or via RADIUS Authentication

SNMP v3 Authentication and Encryption support

IP Address filtering

Disable unused daemons

Active Directory via LDAP

Terminal Server

Telnet

SSH v1 and v2

Rlogin

Auto session login

LPD, RCP printer

MOTD - Message of the day

Serial machine to Ethernet

Tunnel raw serial data across Ethernet - clear or encrypted

Raw serial data over TCP/IP

Raw serial data over UDP

Serial data control of packetized data

Share serial ports with multiple hosts/servers

Virtual modem simulates a modem connection - assign IP address by AT phone number

Virtual modem data can be sent over the Ethernet link with or without SSL encryption

TruePort com/tty redirector for serial based applications on Windows, Linux, Solaris, SCO, HP UX, NCR UNIX and AIX. For a complete list of all the latest drivers click [here](#)

TrueSerial packet technology provides the most authentic serial connections across Ethernet ensuring serial protocol integrity

RFC 2217 standard for transport of serial data and RS232 control signals

Customizable or fixed serial baud rates

Plug-ins allow customer or Perle provided plug-ins for special applications

Software Development Kit (SDK) available

Serial encapsulation of industrial protocols such as ModBus, DNP3 and IEC-870-5-101

ModBus TCP gateway enables serial Modbus ASCII/RTU device connection to ModBus TCP

Data logging will store serial data received when no active TCP session and forward to network peer once session re-established - 32K bytes circular per port

Console Management

Sun / Oracle Solaris Break Safe

Local port buffer viewing - 256K bytes per port

External port buffering via NFS, encrypted NFS and Syslog

Event notification

Manage AC power of external equipment using Perle RPS power management products

Clustering - central console server enables access ports across multiple console servers

Windows Server 2003/2008 EMS - SAC support GUI access to text-based Special Administrative Console

Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

Remote Access

Dial, direct serial PPP, PAP/CHAP, SLIP

HTTP tunneling enables firewall-safe access to remote serial devices across the internet

Automatic DNS Update Utilize DHCP Opt 81 to set IOLAN domain name for easy name management and with Dynamic DNS support , users on the Internet can access the device server by name without having to know its IP address. See Automatic DNS update support for details

IPSEC VPN client/servers Microsoft L2TP/IPSEC VPN client (native to Windows XP)

Microsoft IPSEC VPN Client (native to Windows Vista)

Cisco routers with IPSEC VPN feature set

Perle IOLAN SDS/STS and SCS models

OA&M (Operations, Administration and Management)

SNMP V3 - read and write, Perle MIB

Syslog

Perle Device Manager - Windows based utility for large scale deployments

Configurable default configuration

Installation Wizard

Set a Personalized Factory Default for your IOLANs

Protocols

IPv6, IPv4, TCP/IP, Reverse SSH, SSH, SSL, IPsec/IPv4, IPsec/IPv6, L2TP/IPsec, CIDR, RIPv2/MD5, ARP, RARP, UDP, UDP Multicast, ICMP, BOOTP, DHCP, TFTP, SFTP, SNMP, Telnet, raw, reverse Telnet, LPD, RCP, DNS, Dynamic DNS, WINS, HTTP, HTTPS, SMTP, SNMPV3, PPP, PAP/CHAP, SLIP, CSLIP, RFC2217, MSCHAP

Hardware Specifications - IOLAN STG Serial Terminal Servers


Processor	600 Mhz ARM processor
Memory	
RAM MB	512
Flash MB	4000
Interface Ports	
Number of Serial Ports	4 or 8
Serial Port Interface	RS232 DTE on RJ45 (10 pin)
Sun / Solaris	Sun / Oracle 'Solaris' Safe - no "break signal" sent during power cycle causing costly server re-boots or downtime
Serial Port Speeds	300bps to 230Kbps with customizable baud rate support
Data Bits	Configurable for 5,6,7 or 8-bit protocol support Use TruePort to transparently pass 9-bit serial data
Parity	Odd, Even, Mark, Space, None
Flow Control	Hardware, Software, Both, None
Serial Port Protection	15Kv Electrostatic Discharge Protection (ESD)
Local Console Port	RS232 on RJ45 with DB9 adapter (provided)
Network	Network Autosensing 1000Base-T / 100Base-TX / 10Base-T Auto-MDIX
	Software selectable Ethernet speed 10/100/1000 Auto
	Software selectable Half/Full/Auto duplex
Ethernet Isolation	1.5Kv Magnetic Isolation
Power	
Power Supply	120 V AC (USA), 230V AC (International) Wall Power Adaptor included
	Power via External power 9-30v DC, 4.8 Watts uses standard 5.5mm x 9.5mm x 2.1mm barrel socket
Power Supply Options	4 & 8 Port: Power IN over serial cable
Nominal Input Voltage	12v DC / 24v DC

Input Voltage Range	9-30v DC
Power IOLAN over Serial	4 Port: 9-30v DC 8 Port: 9-30v DC
Power External Device via Serial Port	N/A
Typical Power Consumption @ 12v DC (Watts)	4 Port: 2.0 8 Port: 2.7
Indicators	
	Power/System Ready
	Network Link activity
LEDs	Serial: Transmit and Receive data per port
Environmental Specifications	
Heat Output (BTU/HR)	4 Port: 16.38 8 Port: 9.20
	4 Port: 259,560 8 Port: 171,852
MTBF (hours)	Calculation model based on MIL-HDBK-217-FN2 @ 30 °C
Operating Temperature	0C to 55C, 32F to 131F
Storage Temperature	-40C to 85C, -40F to 185F
Humidity	5 to 95% (non condensing) for both storage and operation.
Case	SECC Zinc plated sheet metal (1 mm)
Ingress Protection Rating	IP30
	Wall mount - bracket included
Mounting	DIN Rail bracket optional
Product Dimensions	
Weight	4 Port: 0.35 kg (0.77 lbs) 8 Port: 0.55 kg (1.2 lbs)
Dimensions	4 Port: 112 x 82 x 28 (mm), 4.4 x 3.2 x 1.1 (in) 8 Port: 112 x 156 x 28 (mm), 4.4 x 6.1 x 1.1 (in)

Packaging	
Shipping weight	4 Port: .66 kg (1.46 lbs) 8 Port: 1.3 kg (2.9 lbs)
Shipping Dimensions	260 x 170 x 70 (mm), 10.2 x 6.7 x 2.8 (in)
Regulatory Approvals	
	CFR47 FCC Part 15 Subpart B:2015
	ICES-003:2016 Issue 6:2016
	CISPR 32:2015/EN 55032:2015 (Class A)
	EN55011 (CISPR11)
	CISPR 16-2-3:2010/A2:2014
	EN61000-3-2:2014, Limited for Harmonic Current Emissions
Emissions	EN61000-3-3:2013, Limits of Voltage Fluctuations and Flicker
	CISPR 24:2010/EN 55024:2010
	EN61000-4-2: 2009 Electrostatic Discharge
	EN61000-4-3: 2006/A2:2010: RF Electromagnetic Field Modulated
	EN61000-4-4: 2004 Fast Transients
	EN61000-4-5: 2006 Surge
	EN61000-4-6: 2009 RF Continuous Conducted
	EN61000-4-8: Power-Frequency Magnetic Field
Immunity	EN61000-4-11: Voltage Dips and Voltage Interruptions
Safety	UL/EN/IEC 62368-1 (previously 60950-1) CAN/CSA C22.2 No. 62368-1
	<u>Reach, RoHS and WEEE Compliant</u>
	ECCN - 5A992
	HTSUS Number: 8517.62.0020
Other	Perle Limited Lifetime Warranty

IOLAN RJ45 Serial Connector Pinout

RJ45 Socket



Pinout	Direction	EIA-232
1		Power In (9-30V DC)
2	in	DCD
3	out	RTS
4	in	DSR
5	out	TxD
6	in	RxD
7		GND
8	in	CTS
9	out	DTR
10		Power Out


Optional Perle adapters for use with straight thru CAT5 cabling

Find IOLAN STS4-D or STS8-D

TCP

Using RAW TCP Sockets


A raw TCP socket connection which can be initiated from the serial-Ethernet device or from the remote host/server. This can either be on a point to point or shared basis where a serial device can be shared amongst multiple devices. TCP sessions can be initiated either from the TCP server application or from the Perle IOLAN **serial-Ethernet** adapter.

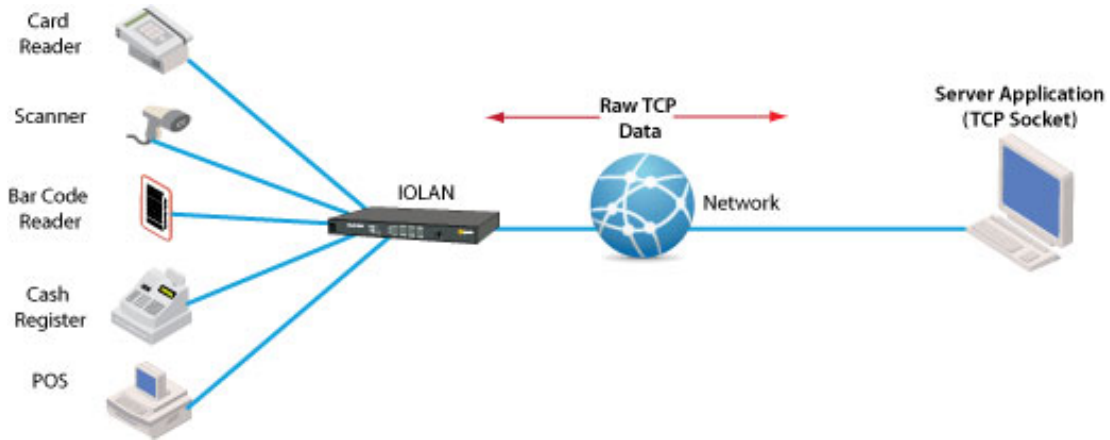

UDP

Using Raw UDP Sockets


For use with UDP based applications, Perle IOLANs can convert serial equipment data for transport across UDP packets either on a point to point basis or shared across multiple devices.

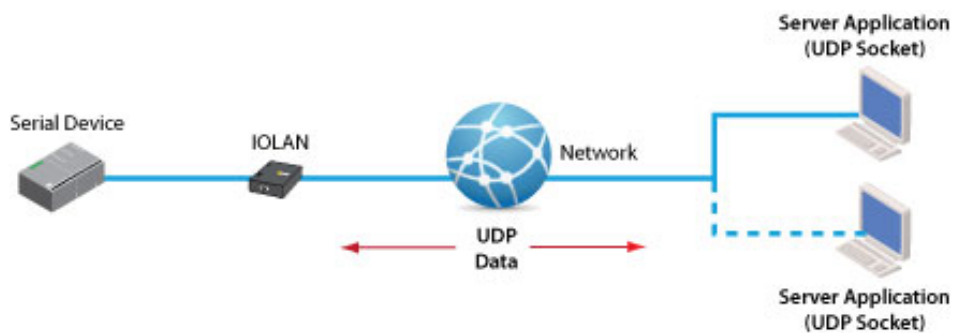

Console Server

Console Management


For access to remote console ports on routers, switches, etc, Perle IOLAN's enable administrators secure access to these RS232 ports via inband Reverse Telnet / SSH or out of band with dial-up modems. Perle IOLAN models with integrated modems are available.

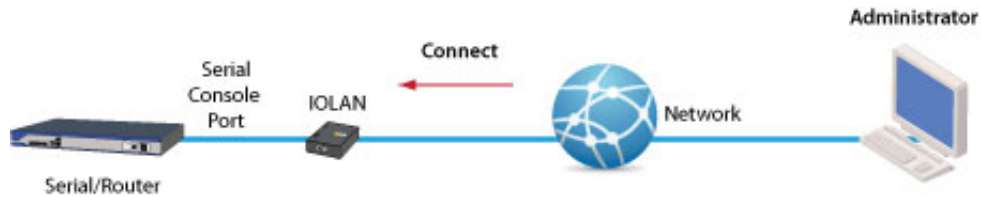

COM/TTY

Connect Serial-based Applications with a COM/TTY Port Driver

Serial ports can be connected to network servers or workstations running Perle's TruePort software operating as a virtual COM port. Sessions can be initiated either from the Perle IOLAN or from TruePort.

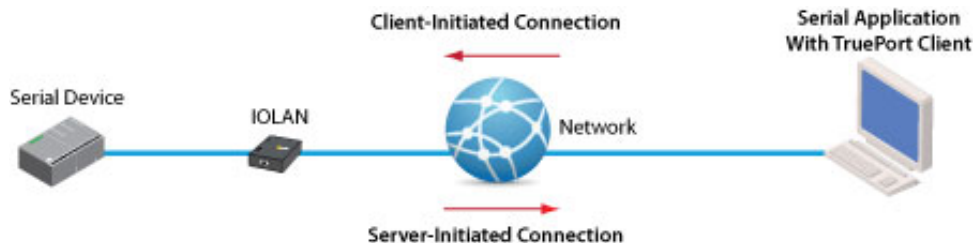

Tunneling

Serial Tunneling between two Serial Devices


Serial Tunneling enables you to establish a link across Ethernet to a serial port on another IOLAN. Both IOLAN serial ports must be configured for Serial Tunneling (typically one serial port is configured as a Tunnel Server and the other serial port as a Tunnel Client).



Virtual Modem

Virtual Modem

Enables the serial-Ethernet adapter to simulate a modem connection. When connected to the IOLAN and initiates a modem connection, the IOLAN starts up a TCP connection to another IOLAN serial-Ethernet adapter configured with a Virtual Modem serial port or to a host running a TCP application.

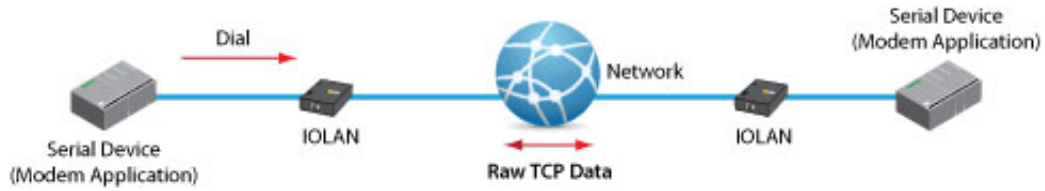

Copyright © 1996 - 2021 Perle. All Rights Reserved