
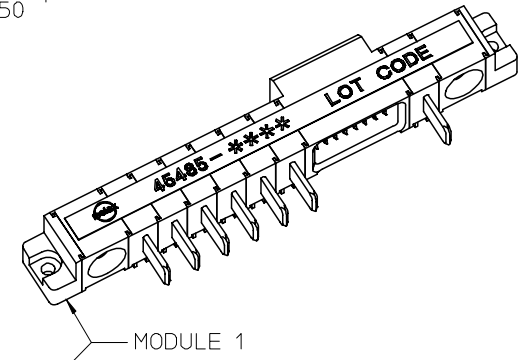
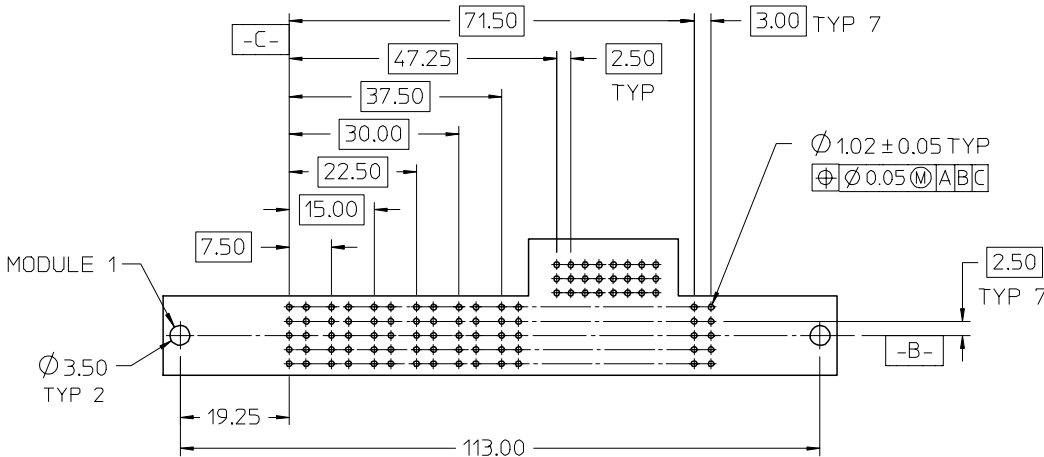
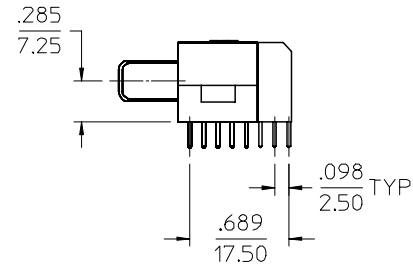
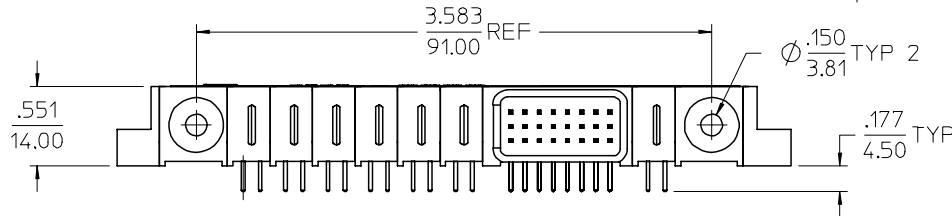


NOTES:

1. MATERIAL: LCP, GLASS FILLED, UL94V-0, BLACK.
CONTACTS: COPPER ALLOY
2. FINISH: SELECT GOLD: 30 MI MIN.
SELECT TIN: 100 MI MIN.
BOTH OVER NICKEL
3. PRODUCT SPECIFICATION: PS-45424-001.
4. PACKAGING SPECIFICATION: PK-45485-001.

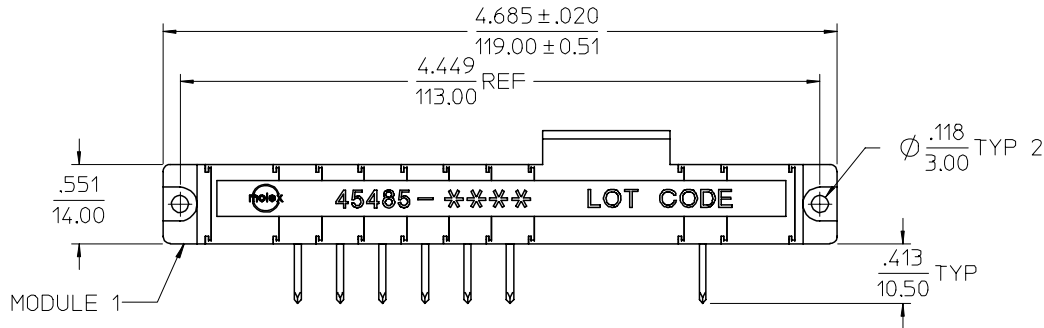

PCB LAYOUT: COMPONENT SIDE
PCB THICKNESS: .125/3.18
PCB TOLERANCE: ±.002/0.05

GEOM TOL PCB
EC NO: UCP2005-2625
DRWN:ADRATND2005/07/07
CHKD:KSAMEC 2005/07/08
APPR:APATEL 2005/07/13
A1

QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm	INCH
	4 PLACES ± ---	± ---
	3 PLACES ± ---	± .010
	2 PLACES ± 0.25	± .015
	1 PLACE ± 0.38	± ---
	ANGULAR ± 1/2°	
	DRAFT WHERE APPLICABLE	
	MUST REMAIN WITHIN DIMENSIONS	

SCALE	DESIGN UNITS
1:1.33	METRIC
DIMENSION STYLE	
IN/MM	
DRAWN BY	DATE
SAMIEC	2003/11/11
CHECKED BY	DATE
MARGULIS	2003/11/11
APPROVED BY	DATE
MARGULIS	2003/11/11

PD 500	PD 506	PD 105	PD 105	PD 105	PD 105	PD 105	PD 105	PD 302	PD 105	PD 506	PD 501
--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------	--------

THIRD ANGLE PROJECTION	REVISE ON CAD ONLY
TITLE	
POWER DOCK ASSEMBLY POWER RIGHT ANGLE SOLDER TAIL	
molex MOLEX INCORPORATED	
MATERIAL NO.	DOCUMENT NO.
45485-0052	SD-45485-052
SHEET NO.	1 OF 1