




UNIT:mm

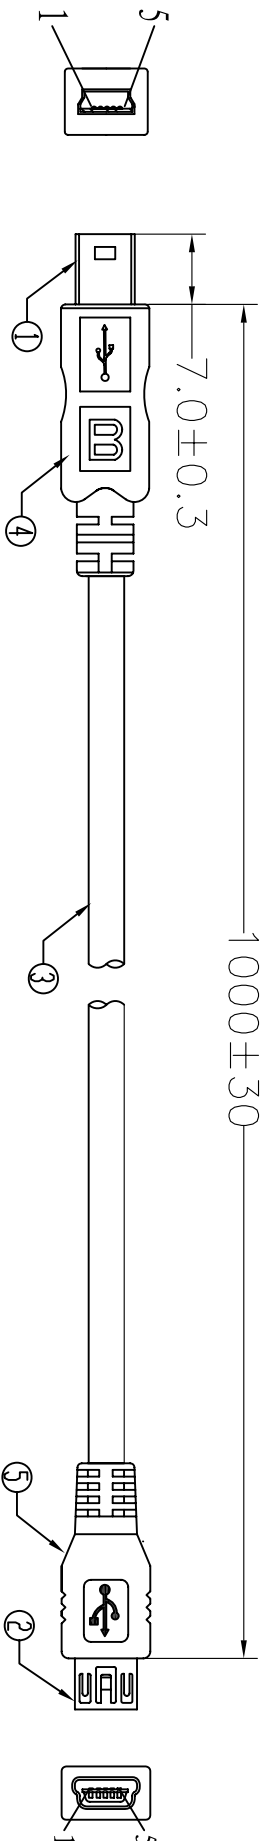

P1
CABLE WHITE PRINT
USB CABLE E189529 AWG 2725 VW-1 30V 80°C
28AWG/1PR AND 28AWG/2C

P2

PIN ASSIGNMENT:

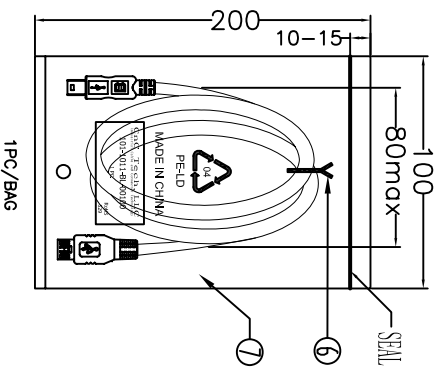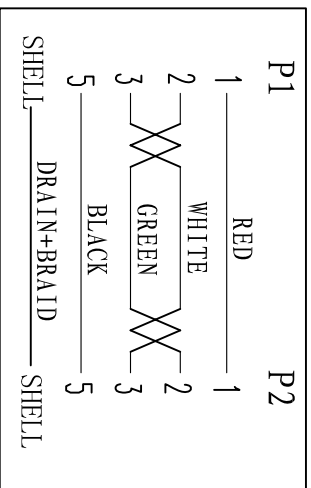

Electrical test:
1. 100% short, open, miswire test
2. Conduct resistance: 2 Ohm(max)
3. Insulation resistance: 5Mohm(min)
4. dielectric test: DC 300V

⑧	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm PRINT BLACK"MADE IN CHINA"+"10PCS"
⑦	PE BAG	1	CLEAR SIZE: 100*200*0.05mm PRINT BLACK"MADE IN CHINA"+"1PC"
⑥	TIE	1	BLACK L=80mm
⑤	IN JACKET	1.5g	CLEAR LD-PE (Mould NO.:NM-101)
④	OUT JACKET	4.8g	BLACK PVC-40P (MOULD NO: WM-196)
③	OUT JACKET	6g	BLACK PVC-40P (MOULD NO: WM-88)
②	CABLE	1	BLACK USB1.1 UE2725 28#/1P+28#/2C+ABB OD:3.8mm L=1000±10
①	CONN	1	USB MINI 5P FEMALE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK
①	CONN	1set	USB MINI 5P MALE SHELL:NICKEL PIN:G/F 3PCS INSULATOR COLOR:BLACK
NO.	NAME	Q'TY	SPECIFICATION

CNC Tech, LLC

Industrial Cable and Connector Technology

DRAWN ZHONGHS DRAWING NO

CHECKED CUSTOMER

APPROVAL ITEM NO. 101-1011-BL-00100

DECIDED DATE 2012-02-17

VERSIONS/EDITEDN A/0 PROJECTION



4

3

2

1