





## Analog Devices Welcomes Hittite Microwave Corporation

NO CONTENT ON THE ATTACHED DOCUMENT HAS CHANGED

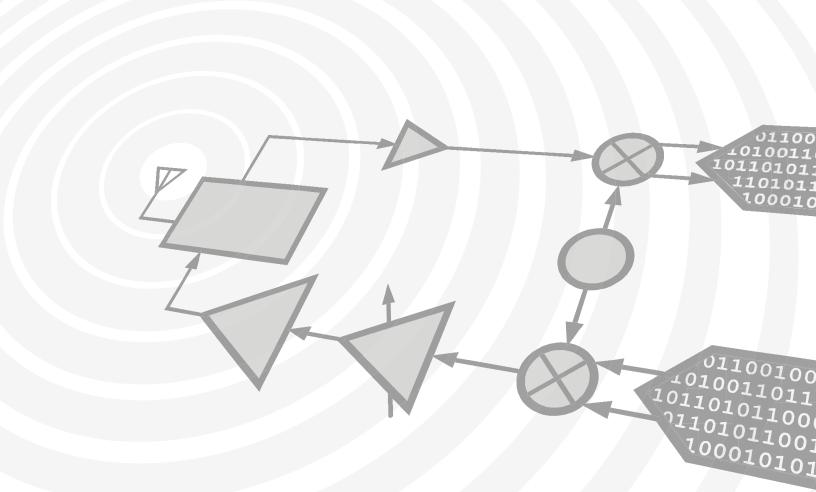





This Gain Block Designer's Kit HMC-DK001 includes samples of 12 of Hittite's most popular gain block SiGe & GaAs HBT MMIC Amplifiers. The table below summarizes the features of each of the products included in this kit. Also included are three evaluation boards, one for each different package style, which enables the designer to test each enclosed sample (Note 1).

Hittite's complete line of Gain Block MMIC amplifiers are offered in industry standard SOT26, MP86 (a.k.a. "Micro-X"), and SOT89 packages, and are targeted to Cellular/3G, Fixed Wireless, CATV, MMDS, WiMAX, WiBro, Microwave Radio and Test Equipment applications from DC to 6 GHz. These Gain Blocks are ideal for use as driver amplifiers, IF gain blocks, high IP3 receive chain amplifiers, and LO buffer amplifiers.

## HMC-DK001 - GAIN BLOCKS, DC - 6 GHZ

| Part<br>Number | Frequency<br>(GHz) | Function        | Gain<br>(dB) | OIP3<br>(dBm) | NF<br>(dB) | P1dB<br>(dBm) | Bias<br>Supply | Package | Quantity |
|----------------|--------------------|-----------------|--------------|---------------|------------|---------------|----------------|---------|----------|
| HMC474MP86E    | DC - 6             | SiGe Gain Block | 15.5         | 22            | 3          | 8             | +5V @ 25mA     | MP86    | 10       |
| HMC476MP86E    | DC - 6             | SiGe Gain Block | 20           | 25            | 2.5        | 12            | +5V @ 35mA     | MP86    | 10       |
| HMC313E        | DC - 6             | HBT Gain Block  | 17           | 27            | 6.5        | 14            | +5V @ 50mA     | SOT26   | 10       |
| HMC311ST89E    | DC - 6             | HBT Gain Block  | 16           | 31.5          | 4.5        | 15.5          | +5V @ 54mA     | ST89    | 10       |
| HMC478MP86E    | DC - 4             | SiGe Gain Block | 22           | 32            | 2          | 18            | +5V @ 62mA     | MP86    | 10       |
| HMC478ST89E    | DC - 4             | SiGe Gain Block | 22           | 33            | 3          | 18            | +5V @ 62mA     | ST89    | 10       |
| HMC479MP86E    | DC - 5             | SiGe Gain Block | 15           | 34            | 4          | 18            | +8V @ 72mA     | MP86    | 10       |
| HMC479ST89E    | DC - 5             | SiGe Gain Block | 15           | 34            | 4          | 18            | +8V @ 75mA     | ST89    | 10       |
| HMC481ST89E    | DC - 5             | SiGe Gain Block | 20           | 33            | 3.5        | 19            | +8V @ 79mA     | ST89    | 10       |
| HMC480ST89E    | DC - 5             | SiGe Gain Block | 19           | 34            | 2.9        | 20            | +8V @ 82mA     | ST89    | 10       |
| HMC481MP86E    | DC - 5             | SiGe Gain Block | 20           | 33            | 3.5        | 20            | +8V @ 74mA     | MP86    | 10       |
| HMC482ST89E    | DC - 5             | SiGe Gain Block | 19           | 36            | 4          | 22.5          | +8V @ 110mA    | ST89    | 10       |

| Part Number         | Description                             | Quantity |
|---------------------|---|----------|
| 104217 - HMC313     | Evaluation Board – Gain Block Amplifier | 1        |
| 110161 - HMC478ST89 | Evaluation Board – Gain Block Amplifier | 1        |
| 107490 - HMC481MP86 | Evaluation Board – Gain Block Amplifier | 1        |

(Note 1) The three evaluation boards included in this kit are fully assembled and tested. In order to test a different amplifier from the kit, the designer must refer to the Application Circuit section of the product data sheet, and assure that the component values for Rbias, L1, C1 and C2 are suited to the intended frequency band and power supply voltage to be used. Data sheets for each of the enclosed samples are available from the enclosed CD, or on-line at www.hittite.com.

