
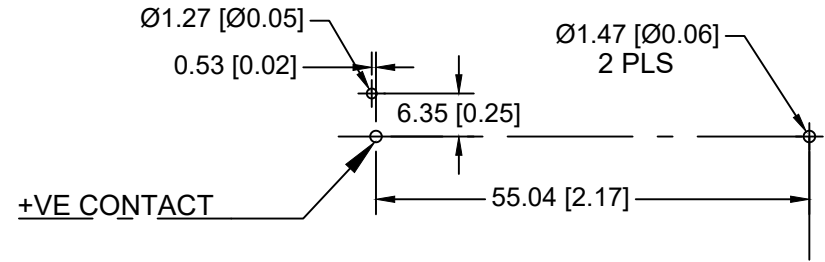
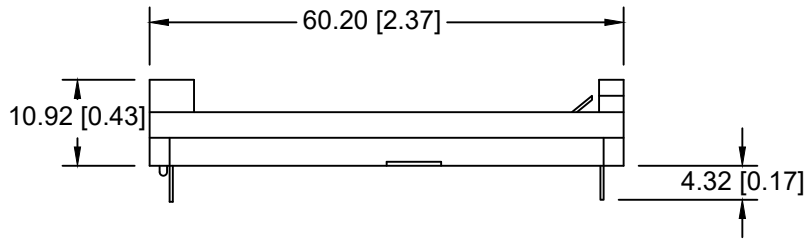



Date	SYM	REVISION RECORD	AUTH	DR.	CK.
10/30/18	A	Dim. 6.35 was 5.46	T.B.	B.S.	
02/27/19	B	Updated note to "ROHS COMPLIANT"	T.B.	B.S.	

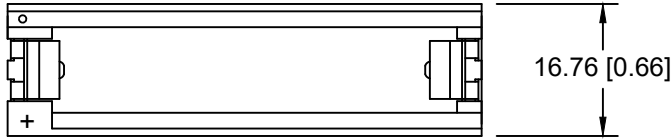

PCB LAYOUT

**SPECIFICATION:**

HOUSING : BLACK POLYPROPYLENE  
 FLAMMABILITY RATING -UL94-HB, UL FILE NO. E216959  
 TEMPERATURE RANGE: -10°C to +100°C  
 CONTACTS: NICKEL PLATED STAINLESS STEEL, TYPE 301, SPRING TEMPER  
 CONTACT RESISTANCE: UNDER 50mΩ FOR +/- CONTACTS PER EIA-540J000  
 ROHS COMPLIANT

Tolerance (Except as noted)	 <b>Memory Protection Devices, Inc</b> 200 Broad Hollow Road, Farmingdale, New York 11735	Scale	Drawn By B.S.
		Approved By T.B.	
decimal ±.5 (.020)	Title ONE "AA" CELL SPRINGLESS HOLDER		
Fractional ± .8 (.030)	Date 02/27/19	Drawing Number BA1AAPC	
Angular ± 3°			