

| т | ۵ | н т | m | 0 |
|---|---|------------|---|---|
| | | | | |







Keying Shown as example

CHARACTERISTICS

-Salt Spray

BASIC SERIES:

SHELL SIZE : 11

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

| -Shell Material | : Composite | | | |
|--------------------------------------------------|----------------------------------------|--|--|--|
| -Shell Plating | : Olive drab Cadmium | | | |
| -Insulator | : Thermoplastic | | | |
| -Contacts | : Copper Alloy | | | |
| -Seals & Grommet | : Silicon Elastomer | | | |
| -Contact Plating | : Gold over copper Alloy 0.8µm minimum | | | |
| -Durability | : 500 Mating cycles | | | |
| -Delivered with Souriau contacts and Accessories | | | | |
| -Temperature Range | _∶ -65°C to +175°C | | | |

: 2000 hours

8D 0

G

11


J

01

F

| Connector dimension | | | |
|---------------------|-------------|--|--|
| Dim | Nominal | | |
| Р | 3.25±0.2 | | |
| РР | 4.93±0.2 | | |
| R1 | 20.62 | | |
| R2 | 18.26 | | |
| S | 26.2±0.3 | | |
| V' | 19.5+1.4/-0 | | |
| W' | 2.1/3.65 | | |
| Ζ' | 32 Max | | |
| VV THREAD | M15x1-6g | | |

Е

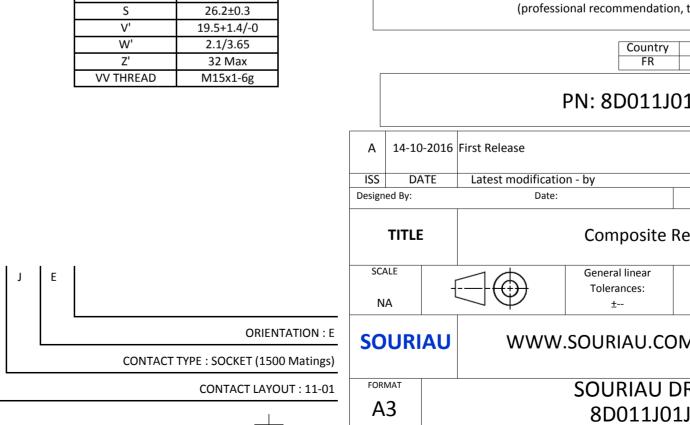

D

| 0 | | Φ | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|------|-------------------------------|--------|---|
| | | | | | 4 |
| LAY | YOUT SHOWN AS EXA | MPLE | | | 3 |
| SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.) Country Jurisdiction & Control List FR Not Listed | | | | | |
| PN: 8D011J01JE | | | | | |
| First Release Latest modificatio Date: | n - by | | CUSTOMER DRAWING | MOD N° | |
| Composite Receptacle 8D series | | | | | |
| $ \Rightarrow $ | General linear Tolerances: ± | | NPRDS / PROJECT 859 | | 1 |
| WWW.SOURIAU.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission | | | | | |
| SOURIAU DRG N° SHEET 8D011J01JE-C 1/2 | | | | | |
| С | | В | A | 1 | J |
| | | | | | |

| | | G | г П | m | D | 0 |
|----|----------|----------------|-----|---|-----------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| | | Contact Layout | | | | Panel Cutout |
| 4 | | 01 | | | Â | SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING |
| | | 1#12 11-01 |] | | * - - - - | |
| ω | Ctc A | X Y 0 0 | | | | Dim ØA ØAA R1 ØT |
| | | | | | | SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of |
| 22 | | | | | | (professional recommendati Country FR PN: 8D011J |
| | | | | | A 14-10-202 ISS DATE Designed By: | 16 First Release Latest modification - by Date: |
| - | | | | | SCALE NA | General linear Tolerances: ± |
| | | | | | FORMAT A3 | J WWW.SOURIAU.CO SOURIAU 8D011J0 |
| | Н | G | F | E | D | C |

