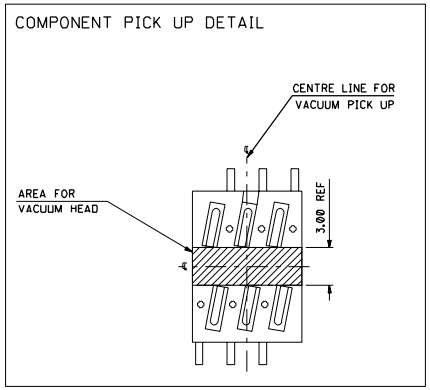





A - A

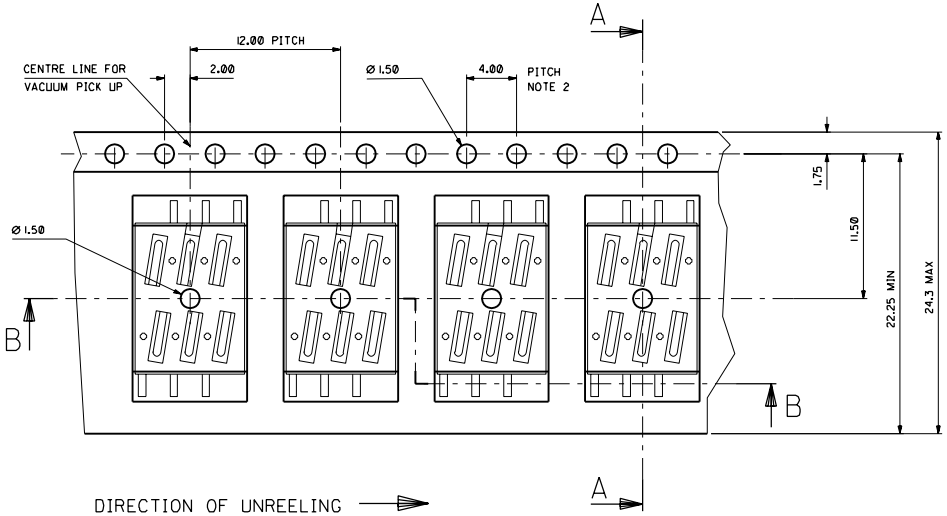

B - B

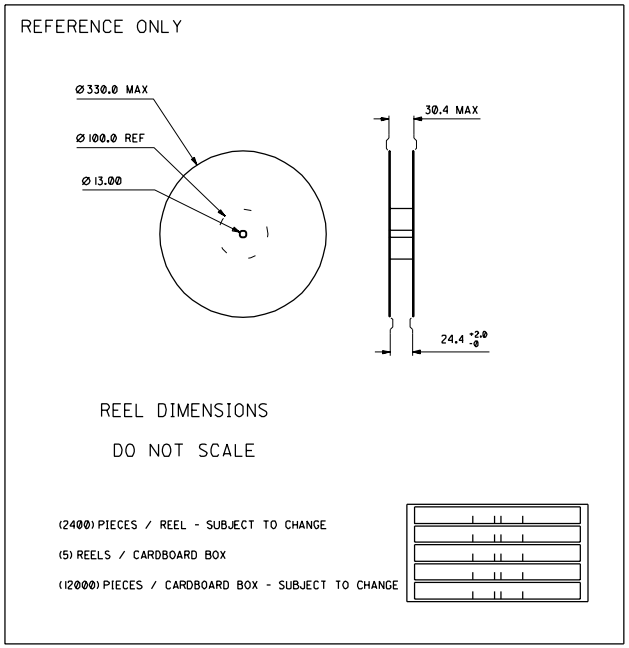


## NOTES:

1) MATERIAL :
   CARRIER TAPE : VOLUME CONDUCTIVE POLYSTYRENE , 0.40 REF THICK , BLACK
   COVER TAPE : COLD SEAL POLYESTER , 0.06 REF THICK , TRANSPARENT
2) PITCH TOLERANCE OVER ANY 10 PITCHES ±0.20
3) PEEL FORCE OF THE COVER TAPE IS 0.2N TO 1.0N
   AT A MAXIMUM PEEL SPEED OF 300/min. ±10%
4) REFERENCE TO EIA-481-2




MOLEX REEL

| | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|
| CARRIER TAPE MOD. | DESCRIPTION | QUALITY SYMBOLS | GENERAL TOLERANCES: (UNLESS SPECIFIED) | | | SCALE 5 : 1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION | DIMENSIONS: ☐ mm/INCH ☐ INCH/mm ☒ mm ONLY | SHT | REV |
| EC NO. E2001-1278 | | MAJOR ▼ = | | mm | INCH | DRAWN BY & DATE DBRENNAN 99/03/15 | | TITLE: PKG FOR SIM CONN | | REVISE ON CAD ONLY | |
| DRWN: B MURPHY 01/05/29 | | CRITICAL (C) = | 4 PLACES | ±0. | ±. | CHECKED BY & DATE EFOLAN 99/03/15 | | | | | |
| CH'K: / / | | | 3 PLACES | ±0. | ±. | | | | | | |
| APPR: / / | | | 2 PLACES | ±0.10 | ±. | APPROVED BY & DATE MWILHITE 99/03/15 | | molex MOLEX INCORPORATED | | | |
| | | | 1 PLACE | ±0.20 | ±. | | | | | | |
| | | | ANGULAR: ± 1/2° | | | CAD FILENAME . | | MATERIAL NO. 91362-0001 | DRAWING NO. SD-91362-005 | SHEET NO. 1 OF 1 | |
| C | REV | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | | | | | | | SIZE D | |

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.