

SPECIFICATIONS:

MATERIAL:-

- △ HOUSING: PBT, UL94V-0
- TERMINAL: PHOSPHOR BRONZE

FINISH:-

- △ PIN 1: Au PLATED
- △ PIN 2~7: SILVER PLATED

ELECTRICAL:-

- CURRENT RATING: 1 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE: 500V AC RMS FOR 60 SECS


CONTACT RESISTANCE: 30 m Ω MAX.

INSULATION RESISTANCE: 100 M Ω MIN AT 500V DC


ENVIRONMENTAL:-

- △ OPERATING TEMPERATURE: -25°C ~ +70°C

NOTES: ALL DIMENSIONS AND NOTES MARKED \times ARE CRITICAL AND MUST BE CHECKED IN ACCORDANCE WITH QUALITY DOC. QI-02A

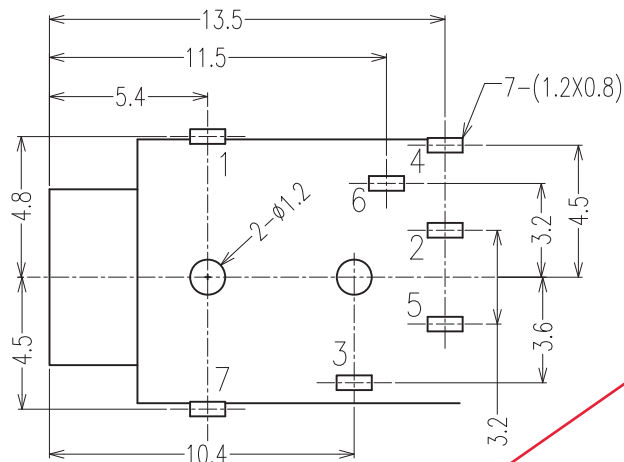

PCB LAYOUT (TOP VIEW)

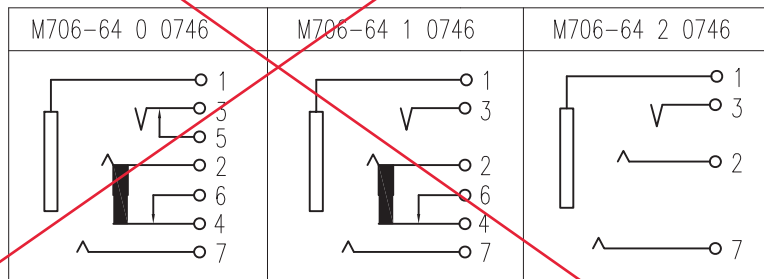

Allan	3	06.10.10	A328
Allan	2	05.10.09	A241
Allan	1	01.08.06	-

NAME	ISS.	DATE	C/NOTE
------	------	------	--------

APPROVED: *[Signature]*

CHECKED: *[Signature]*

DRAWN: Allan

CUSTOMER REF.:

ASSEMBLY DRG:

ORDER CODE M706-64 X 0746	REFER SCHEMATIC

OBSOLETE

TOLERANCES
 X.X = ± 0.20 mm
 X.XX = ± 0.10 mm

HARWIN

HARWIN USA
 TEL: 603 893 5376
 FAX: 603 893 5396
 mis@harwin.com

HARWIN Europe (UK)
 TEL: 023 9231 4545
 FAX: 023 9231 4590
 mis@harwin.co.uk

HARWIN Asia
 TEL: +65 6 779 4909
 FAX: +65 6 779 3868
 mis@harwin.com.sg

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
 X. = ± 1 mm
 X.X = ± 0.25 mm
 X.XX = ± 0.10 mm
 X.XXX = ± 0.01 mm
 ANGLES = $\pm 5^\circ$
 UNLESS STATED

MATERIAL: SEE NOTES
 FINISH: SEE NOTES
 S/AREA: mm²

TITLE:
 3.5mm EARPHONE JACK, PCB MOUNT
 PLASTIC HOUSING WITHOUT BUSHING
 DRAWING NUMBER:
M706-64 X 0746
 SHT 1 OF 1