

NESTED
PLUG
CONTACT

NOTE:

MATERIAL

INSULATOR LCP UL94V-0, BLACK
CONTACT BRASS, 15u" GOLD PLATING
SHELL ZINC ALLOY, NICKEL 60u"-100u"

ELECTRICAL

RATED CURRENT 2A
VOLTAGE 60VDC
INSULATOR RESISTANCE 1000 MOhms MIN.
CONTACT RESISTANCE 30 mOhms MAX.
WIRE AWG 26 AWG MAX


ENVIRONMENT

OPERATION TEMPERATURE -40°C TO +125°C
PROCESS TEMPERATURE 260°C

*NOT DESIGNED TO MATE WITH NORCOMP 380 // 381 // 960 SERIES & NORCOMP MICRO-D CABLE ASSEMBLIES USING THE 960 SERIES CONNECTORS.

**DESIGNED TO MATE WITHIN NORCOMP 58Y-M SERIES MICRO-D CONNECTORS

DIMENSIONS(mm)					
SIZE	A	B	C	D	E
9	19.55	14.35	5.08	3.81	8.20
15	23.36	18.20	8.89	7.62	12.00
25	29.70	24.55	15.24	13.97	18.35

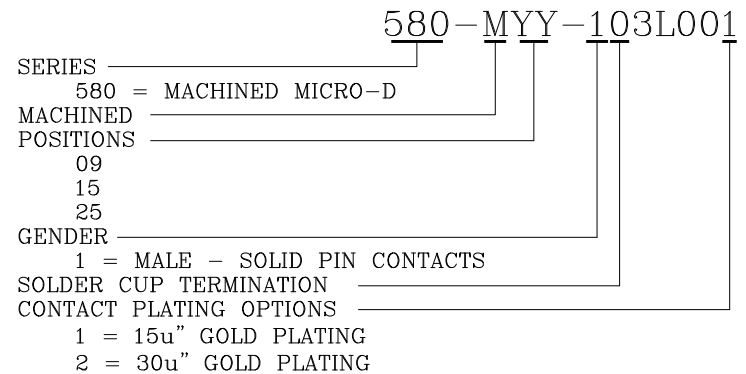

RoHS COMPLIANT



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN:

J. KADEL

DATE:

05/12/2020

TOLERANCES

.x ±0.20
.xx ±0.10
.xxx ±0.05
.xxxx ±0.03
ANGULAR ±1°

UNITS = mm

DO NOT SCALE FROM DRAWING

NorComp

SCALE:

NTS

SHEET

OF

1 1

REV

4

DWG NO.

580-MYY-103L001