


COIL: @ +25 °C	
RESISTANCE	160 OHMS ± 10%
NOMINAL VOLTAGE	12.0 VDC
MUST OPERATE	6.4 VDC
MUST RELEASE	4.0 VDC MAX, 0.7 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	100 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE TIME 4 MS MAX
CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

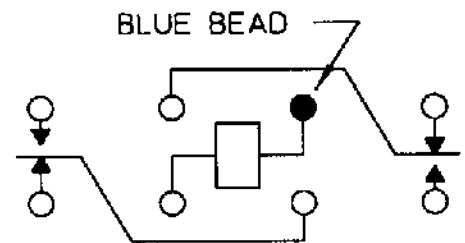

CONTACT RATING: LOW LEVEL TO 2 AMPS
28 VDC RESISTIVE 100,000 OPERATIONS

DR. R.B. 11/13/95 CK. 113/25/B

**COMMUNICATIONS
INSTRUMENTS, INC.**

CUST. QPL
CUST. NO. M39016/6-130L

TYPE "HFW" RELAY

HFW1101G01