


FACE VIEW-FEMALE INSERT		FACE VIEW-MALE INSERT	
1 GREEN 2 BLACK 3 WHITE	1 BLACK 2 WHITE 3 RED 4 GREEN	1 GREEN 2 BLACK 3 WHITE	1 BLACK 2 WHITE 3 RED 4 GREEN

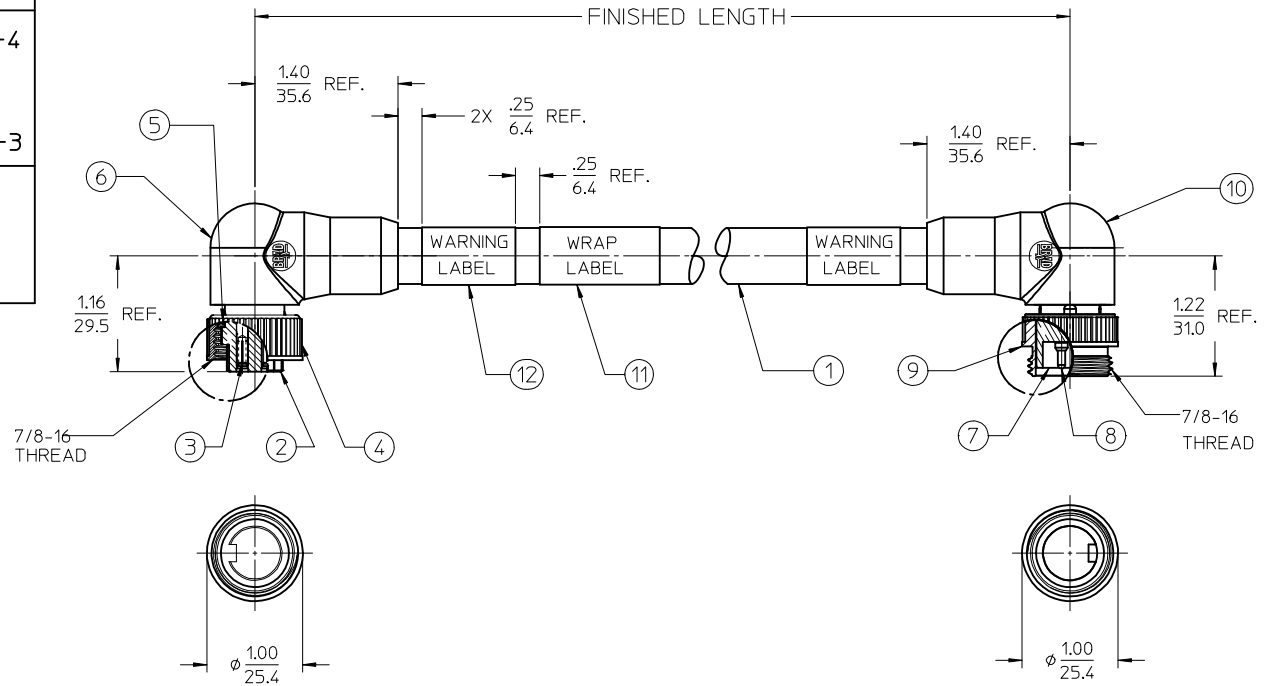

NOTES:

- MATERIAL: SEE TABLE
- FINISHES: SEE TABLE
- WRAP LABEL IS MARKED WITH P/N, DATE CODE VOLTAGE & AMPERAGE
- MATES WITH: MINI CHANGE 3 POLE RECEPTACLE
- ELECTRICAL DATA:  
14AWG UL TYPE: TC-ER STRANDED CABLE  
MAX VOLTAGE: 600V  
MAX CURRENT: 15A  
PROTECTION IP67 (WHEN MATED)  
TEMPERATURE RANGE: -20°C TO 90°C
- PACKAGING:  
CABLE ASSEMBLIES ARE BAGGED SEPERATLY IN POLY BAGS WITH BAR CODE LABEL ATTACHED TO OUTSIDE OF BAG.
- ASSEMBLY IS RoHS COMPLIANT

PART NUMBER LEGEND

11X033A46MXXX

- DOUBLE END
- POLE COUNT (3 OR 4)
- MC FEMALE 90D TO MALE 90 DEG (EXT THD)
- CABLE TYPE: 14 AWG TC ER, PVC GRAY
- FINISHED LENGTH:  
M001= .1M  
M010= 1.0M  
M100= 10.0M

12	2	WARNING LABEL	VINYL	ORANGE/BLACK
11	1	WRAP LABEL	VINYL	BLACK/YELLOW
10	1	90 DEG OVERMOLD	PVC	GRAY
9	1	MALE COUPLING NUT	ZINC ALLOY	BLACK
8	XX	CONTACT PIN	Cu ALLOY	GOLD PLATE
7	1	MALE INSERT	PVC	BLACK
6	1	90 DEG OVERMOLD	PVC	GRAY
5	1	FRICITION RING	NYLON	WHITE
4	1	FEMALE COUPLING NUT	ZINC ALLOY	BLACK
3	XX	CONTACT SOCKET	Cu ALLOY	GOLD PLATE
2	1	FEMALE INSERT	PVC	BLACK
1	SEE NOTE 5	CABLE	PVC	GRAY
ITEM	QTY	DESCRIPTION	MATERIAL	FINISH

RELEASED EC NO: IPGZ016-0750 DRWNRSTONE 2015/11/23 CHKD:BARDEN 2015/12/08 APPR:BWODMAN 2016/02/29	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
		4 PLACES ± --- ± ---	3 PLACES ± --- ± ---	2 PLACES ± --- ± .01	1 PLACE ± 0.3 ± ---	0 PLACE ± --- ± ---	ANGULAR ± 1 °	DRAWN BY DATE RSTONE 2015/11/23	
A	REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		CHECKED BY DATE BARDEN 2015/12/08		APPROVED BY DATE BWODMAN 2016/02/29		MATERIAL NO.	
		SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		DOCUMENT NO. SD-130062-032		SHEET NO. 1 OF 1	