



PFCL25-24														
Type Of Winding	Unipolar							Bipolar						
Steps Per Revolution*	24													
Thread Pitch	mm	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	
Travel/Step	mm	0.02	0.04	0.05	0.02	0.04	0.05	0.02	0.04	0.05	0.02	0.04	0.05	
Stroke	mm	30 or 60												
Force @ 200pps	N	11	9.5	8	11	9.5	8	16	14	11	16	14	11	
Rated Voltage	V	12			5				12			5		
Rated Current	A/Ø	0.10			0.31				0.10			0.30		
Resistance	Ω	120			16				122			15		
Inductance	mH/Ø	27			3.7				59			7.1		
Operating Temp. Range	°C	-10 to +50												
Temperature Rise*	°K	70												
Weight	g	60												

PFCL25-48														
Type Of Winding	Unipolar							Bipolar						
Steps Per Revolution	48													
Thread Pitch	mm	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	0.48	0.96	1.2	
Travel/Step	mm	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025	0.01	0.02	0.025	
Stroke	mm	30 or 60												
Force @ 200 pps	N	22	17.5	15	22	17.5	15	31	22.5	20.5	31	22.5	20.5	
Rated Voltage	V	12			5				12			5		
Rated Current	A/Ø	0.10			0.31				0.10			0.33		
Resistance	Ω	120			16				122			15		
Inductance	mH/Ø	33			4.5				73			8.7		
Operating Temp. Range	°C	-10 to +50												
Temperature Rise	°K	70												
Weight	g	60												


Unipolar Constant Voltage 24C4 Torque Curve




Unipolar Constant Voltage 48C4 Torque Curve

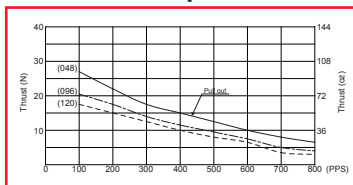

Bipolar Constant Voltage 24P4 Torque Curve

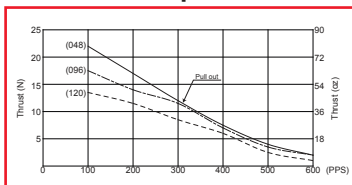

Bipolar Constant Voltage 48P4 Torque Curve

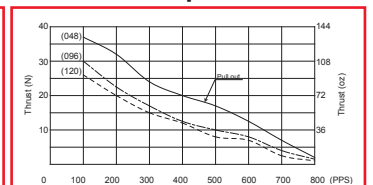

All tin-can motor specifications are based on full-step constant voltage operation
Magnet type: Neodymium
Torque curves are for reference only and are not guaranteed.