


COIL: @ +25 °C  
 RESISTANCE 47 OHMS ± 10%  
 NOMINAL VOLTAGE 5.0 VDC  
 MUST OPERATE 2.2 VDC  
 MUST RELEASE 1.32 VDC MAX, 0.21 VDC MIN

ENVIRONMENT:  
 VIBRATION 10 CPS TO 2500 CPS @ 20 g's  
 SHOCK 50 g's 11 MS. DURATION  
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 6 MS MAX  
RELEASE 5 MS MAX  
CONTACT STABILIZATION 2.5 MS MAX

CUSTOMER DATA SHEET

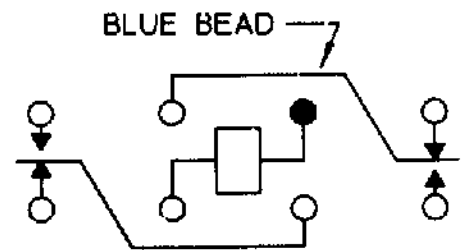

CONTACT RATING: 2 AMPS 28 VDC  
0.1 AMP 115 VAC RESISTIVE 0.5 AMPS  
28 VDC INDUCTIVE 100,000 OPERATIONS

DR. R.B. 11/7/94 CK. *V7/09/98*

 COMMUNICATIONS INSTRUMENTS, INC.

CUST. OPL  
 CUST. NO. M39016/44-008M

TYPE "HMS" RELAY

HMS1201S108M