

# CENB1080

Universal Input 80 Watt Series



ITE Switch-Mode Power Supply

3 Year Warranty

- 100-240VAC Universal Input
- Meets EISA2007, CEC Efficiency Level V, EU (EC) No 278/2009 Phase II
- Desktop Style
- 12V to 48V Single Output Models, up to 80W
- Modified and Custom Designs Available
- Regulated Output with Low Ripple
- Impact-Resistant Polycarbonate Enclosure
- No Load Power Consumption <0.5W
- Certified to UL/EN/IEC60950-1, 2<sup>nd</sup> Edition



## Specifications

All Specifications are typical at nominal input, full load at 25°C unless otherwise stated.

<b>AC Input</b>	100-240Vac, +/-10%, 47-63 Hz, 1Ø	<b>MTBF</b>	>100,000 hours calculated
<b>Input Current</b>	100Vac: 1.5A	<b>Hold-up Time</b>	18 ms min. @ 115Vac, 60 ms min. @ 230 Vac
<b>Inrush Current</b>	60A peak @ 264Vac, cold start	<b>Overload Protection</b>	Hiccup Mode
<b>Input Fuse</b>	3.15A, 250V Internal Primary Current Fuse provided	<b>Short Circuit Protection</b>	Hiccup Mode
<b>Efficiency</b>	Meets International Efficiency Level V	<b>Topology</b>	Switching – Fixed Frequency Flyback
<b>Output Voltage</b>	See chart	<b>Safety and EMC Approvals</b>	EN/IEC/CSA/UL60950-1, 2 <sup>nd</sup> Edition EMC: See chart
<b>Output Power</b>	See chart	<b>Dielectric Withstand</b>	Input-Output: 4,242Vdc Input-GND: 1,500 Vac, Output-GND: 500Vdc
<b>Ripple and Noise</b>	1% pk-pk max., 20MHz BW	<b>Operating Temperature</b>	0° to 40°C, no derating
<b>Line/Load Regulation</b>	Line: +/- 1 to 2%, Load: +/-5% at end of cable	<b>Storage Temperature</b>	-30 to +85°C
<b>Transient Response</b>	500µs max., 50% load step, typical	<b>Relative Humidity</b>	5% to 95%, non-condensing
<b>Minimum Load</b>	Not required	<b>Altitude</b>	0 to 10,000 ft
<b>Case Material</b>	Black 94V0 Polycarbonate	<b>Output Connections</b>	Cable: See outline drawing Connector: Ault #3, 2.5mm barrel or #51, 6-pin Molex (12V model)
<b>Case Dimensions</b>	131 x 72 x 43mm. See outline drawing	<b>Weight</b>	500g

## EMI/EMC Compliance

<b>Conducted Emissions</b>	FCC Part 15, Class B, EN55022 Class B, EN55024
<b>Radiated Emissions</b>	FCC Part 15, Class B, EN55022 Class B, EN55024
<b>Voltage Fluctuations</b>	EN61000-3-3, Line Flicker
<b>Static Discharge Immunity</b>	EN61000-4-2, 6kV Contact Discharge, 8kV air discharge
<b>Radiated RF Immunity</b>	EN61000-4-3, 3V/m.
<b>EFT/Burst Immunity</b>	EN61000-4-4, 2kV/5kHz..
<b>Line Surge Immunity</b>	EN61000-4-5, 1kV differential, 2kV common-mode
<b>Conducted RF Immunity</b>	EN61000-4-6, 3Vrms
<b>Power Frequency Magnetic Field Immunity</b>	EN61000-4-8, 3A/m
<b>Voltage Dip Immunity</b>	EN61000-4-11 crit. A, 100Vac 60Hz, 40%/5 cycles with 70% full load.
<b>Line Frequency Harmonics</b>	EN61000-3-2, Class A

# CENB1080

Universal Input 80 Watt Series

ITE Switch-Mode Power Supply


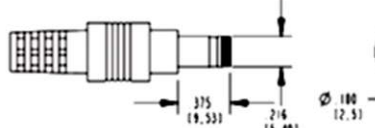
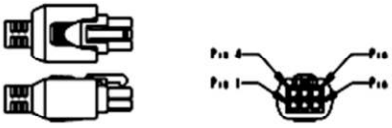
3 Year Warranty

Model Number	Volts (V)	Output Current (max)	Max Watts	Ripple (Vp-p max)
CENB1080A1251F01	12 V	6.5 A	78.0 W	120mV
CENB1080A1503F01	15 V	5.2 A	78.0 W	150mV
CENB1080A1803F01	18 V	4.33 A	78.0 W	180mV
CENB1080A2403F01	24 V	3.25 A	78.0 W	240mV
CENB1080A4803F01	48 V	1.65 A	79.2 W	480mV


## Model Number Key

**CENB 1 080 A VV 03 F 01**


- Model:** "01" = Standard. "02" and higher indicates a modified model.
- Input Connector:** "F" = IEC320 C14 grounded, Other options available, see next page.
- Output Connector:** "03" = Ault #3, 2.5mm barrel connector or #51, 6-pin Molex. Other options available,
- Output Voltage:** "12" = 12Vdc, "15" = 15Vdc, "18" = 18Vdc, "24" = 24V dc, "48" = 48Vdc
- Model:** "A" = Original Configuration
- Output Power:** "080" = 80 Watts
- # of Outputs:** "1" = Single Output
- Product Family:** "C" = Commercial/ITE/Industrial, "E" = External, "NB" = Model Series Designator

Input Receptacle	Output Connector	Output Connector (12V Model)
 <p>IEC320 C14 - Class I Grounded (F)</p>	<p>3</p>  <p>"#3" Connector is 2.5mm barrel type, center (+)</p>	<p>51</p>  <p>"#51" Connector is Molex 39-01-2060 or equivalent.</p>

## 12V Model Outline Drawing

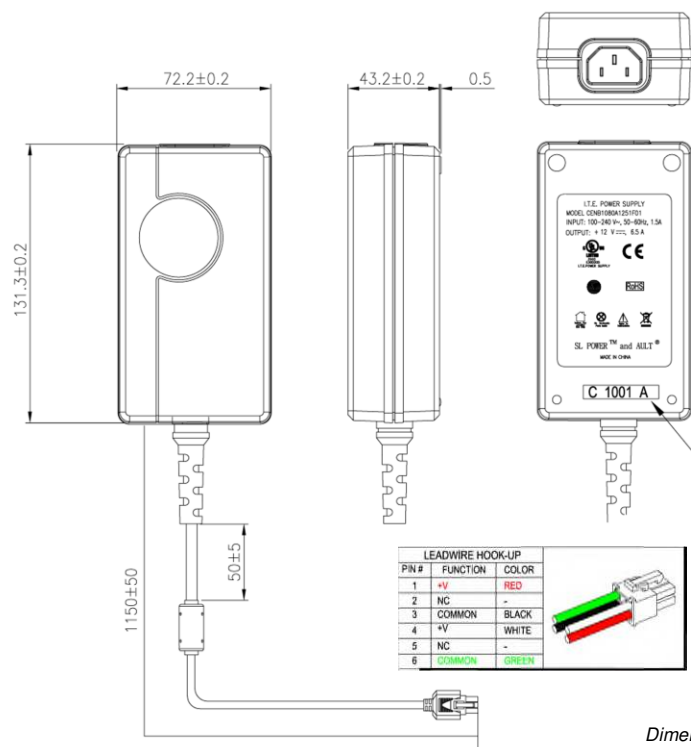

## 15V-48V Model Outline Drawing

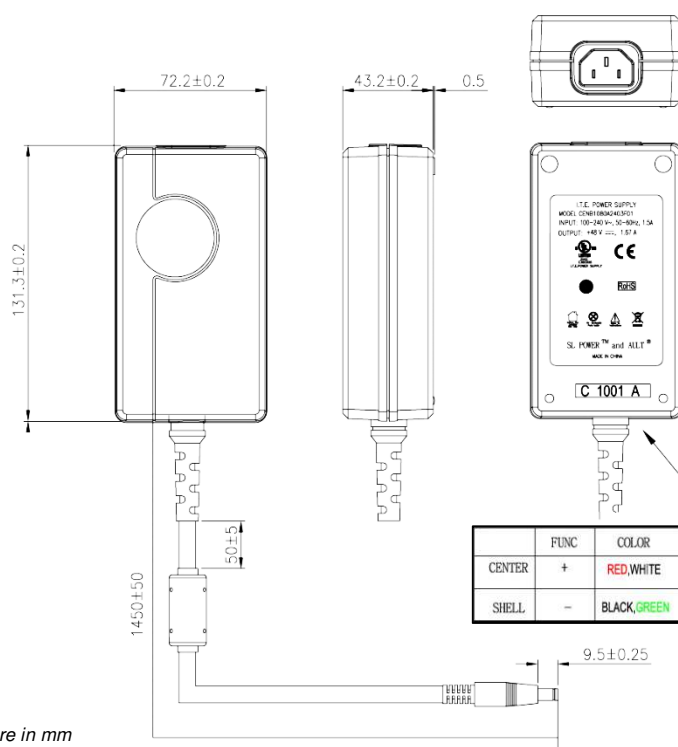

Data Sheet © 2015 SL Power Electronics Corp. The information and specifications contained herein are believed to be correct at the time of publication. Rev. 8-10-2015  
 However, SL Power accepts no responsibility for consequences arising from reproduction errors or inaccuracies. Specifications are subject to change without notice.