


Materials

Shell: brass, nickel plated
 Cable: stranded steel

Environmental requirements

Waterproof: IP67 when mating with corresponding (IP67) socket connector

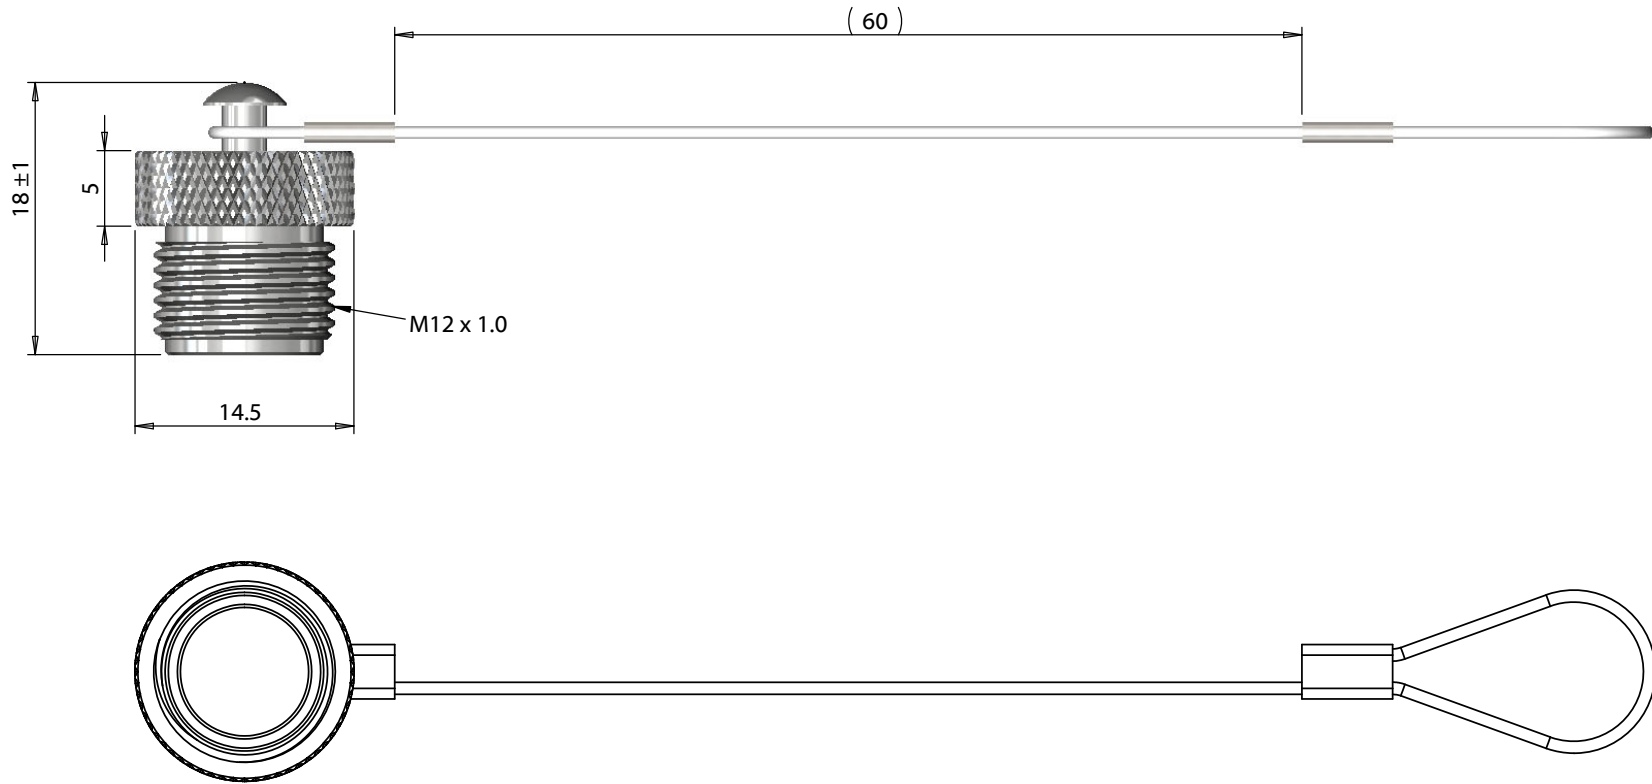

| | | | | | |
|-----------|------------|-----------------|--|--|---|
| Revision: | Date: | Description: | Prepared: | Notes: | <h1>TENSILITY</h1> <p>tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com</p> |
| A | 11/11/2020 | Initial release | AG <small>Digitally signed by AG Date: 2020.11.11 13:29:57 -08'00'</small> | RoHS compliant | |
| | | | Verified: | Function test: no open, no short circuit, no intermittent | Size: |
| | | | AW <small>Digitally signed by AW Date: 2020.11.11 13:34:44 -08'00'</small> | Description: | A |
| | | | Dimensions are in millimeters. Tolerances: X: ± 0.3 mm X.X: ± 0.1 mm X.XX: ± 0.05 mm | Cap, M12 socket with leash, Ø14.5xL18 mm, brass, nickel plated | Part number: 55-00153 |
| | | | | | Scale: 2:1 |
| | | | | | |
| | | | | | Sheet 1 of 1 |