



### Electrical specifications

**Frequency range:** 2.3 GHz to 2.4 GHz  
**Frequency Bandwidth:** 20 MHz  
**Insertion loss:** 1.7 dB  
**Return loss:** -19 dB  
**Rejection:** 94 dB@ CF+/- 43 MHz


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 5.25" X 1.40" X 0.90" in

### Environmental

**Operating Temperature:** -45 to +85° C  
**Storage Temperature:** -55 to +95° C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5 to 200 MHz

### Outline Drawing:

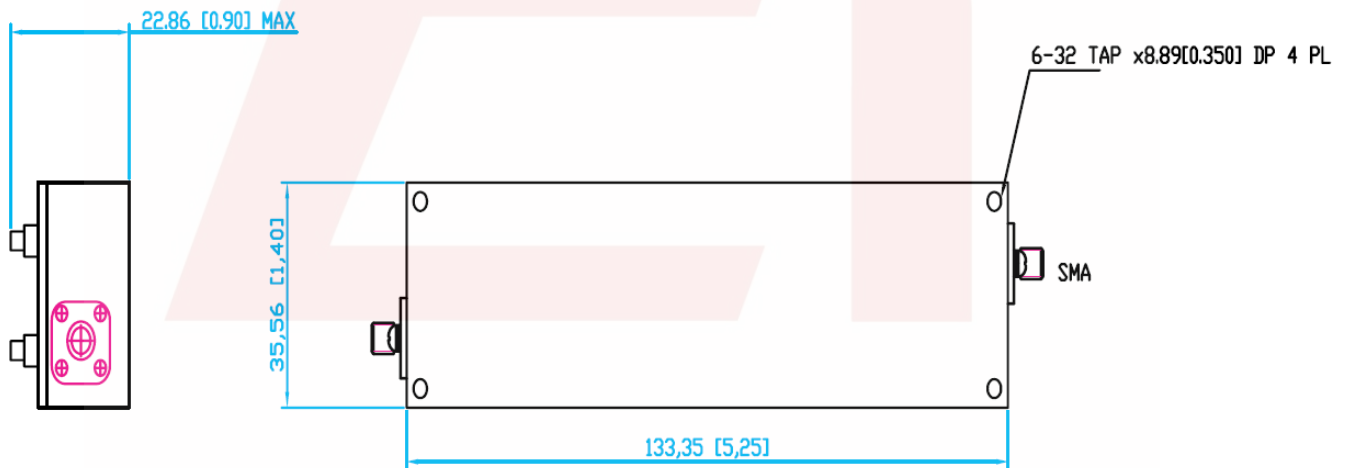

Finish: Black Paint



Plot:

