

Ŧ	۵	н <b>п</b>	m	0



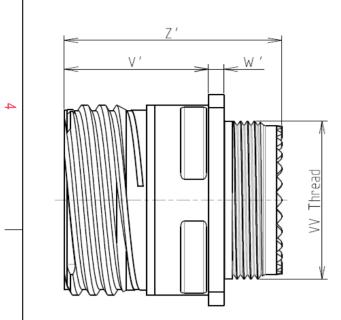



LAYOUT SHOWN AS

Keying Shown as example

## CHARACTERISTICS

ယ

 $\sim$ 

-Mass

BASIC SERIES:

SHELL SIZE : 13

Н

SHELL TYPE : Square Flange Receptacle

CONTACT TYPE : Standard Crimp Contact

PLATING : J = Olive drab Cadmium

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Composite			
-Shell Plating	: Olive drab Cadmium			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	: -65°C to +175°C			
-Salt Spray	: 2000 hours			

: 14.1 g ± 10%

8D 0

G

13

J

08

Ρ


F

В

Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	23.01		
R2	20.62		
S	28.6±0.3		
V'	19.5+1.4/-0		
W'	2.1/3.65		
Z'	32 Max		
VV THREAD	M18x1-6g		
R2 S V' W' Z'	20.62 28.6±0.3 19.5+1.4/-0 2.1/3.65 32 Max		

Е

SOURIAU shall not be liable for due to a use of the Products the Specifications issued by either (professional recommend

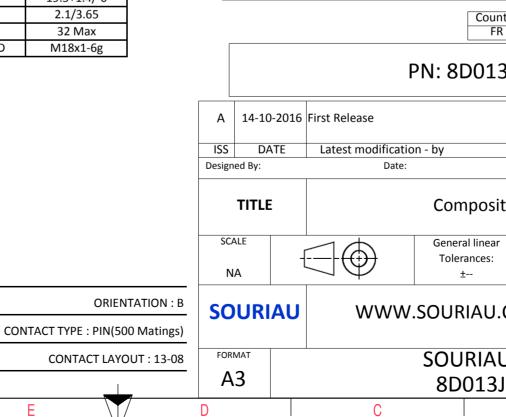

	Φ		A			
					3	
	AMPLE					
s whic er of t	non-conformit h does not co he Parties or t n, technical n	mply with by a third part	ty			
untry FR	Jurisd	liction & Cont Not Listed	rol List		2	
.3J08PB						
	1			MOD N°		
		CUSTOME	R DRAWING			
	ite Receptacle 8D series					
ar :	NPRDS / PROJECT 859					
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission						
UDRG N° SHEET						
8109	BPB-C		A	1/2	J	

		۵	<del>ار</del> (	m		0
		Contact Layout				Panel Cutout
4	-×	$ \begin{array}{c} & & & \\ & & & \\ & & & \\ & & & \\ & & & \\ $			ħ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Con posi IL A B C C C D E F G G H	Mon (mm)         X-axis (mm)         Y-axis (mm)           +.065 (1.65)         +.157 (3.99)           +.170 (4.32)         +.000 (0.00)           +.120 (3.05)        120 (3.05)          120 (3.05)        120 (3.05)          120 (3.05)        120 (3.05)          120 (3.05)        120 (3.05)          120 (3.05)        120 (3.05)          170 (4.32)         +.000 (0.00)          065 (1.65)         +.157 (3.99)			2	
ى		mber of Size Service Contact Supersedes ntacts contacts rating location 8 8 20 I All MS20051-8				Dim ØA ØAA R1 ØT
	-					SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of
N						(professional recommendation Country FR
					ISS DATE	
					Designed By: TITLE SCALE	Date: Composite
					NA SOURIA	
			_	T	FORMAT A3	SOURIAU 8D013J0
	Н	G	F	E	D	C

