

# SPECIFICATION CONTROL DRAWING


55A1131

TITLE THREE CONDUCTOR CABLE, MODIFIED ETFE  
INSULATED, SHIELDED, JACKETED, LIGHTWEIGHT, 600 VOLT

Date 25APR11

Revision P

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

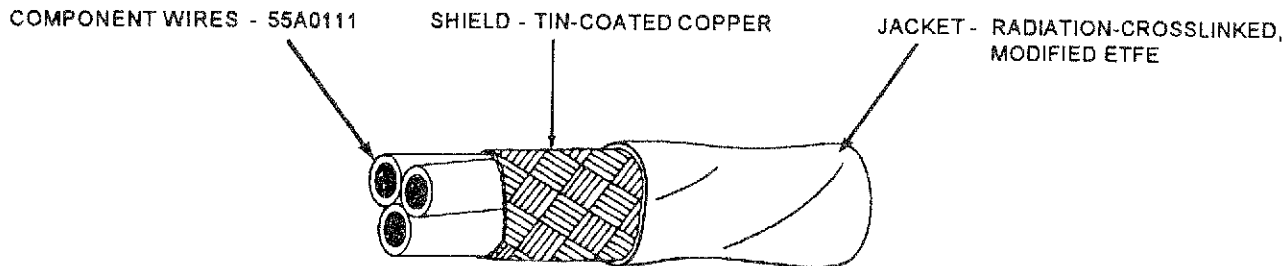

### CABLE CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (inch)		OUTSIDE DIAMETER (inch)		MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A1131-30-*	30	38	.006	.008	.085	.090	6.4
55A1131-28-*	28	38	.006	.008	.091	.096	7.6
55A1131-26-*	26	38	.006	.008	.102	.108	9.7
55A1131-24-*	24	38	.006	.008	.113	.119	12.3
55A1131-22-*	22	38	.006	.008	.126	.132	15.9
55A1131-20-*	20	38	.006	.008	.143	.149	21.7
55A1131-18-*	18	38	.006	.008	.165	.172	30.4
55A1131-16-*	16	38	.006	.008	.182	.189	37.4
55A1131-14-*	14	38	.007	.009	.221	.229	54.0
55A1131-12-*	12	38	.007	.009	.260	.270	77.5
55A1131-10-*	10	38	.007	.009	.311	.327	118.

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms)  
 ACCELERATED AGING: 300 ± 3°C for 7 hours  
 BLOCKING: 200 ± 3°C for 8 hours  
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz  
 FLAMMABILITY: Procedure 1, 3 seconds (maximum);  
 3 in. (maximum); no flaming of facial tissue  
 JACKET COLOR: White preferred  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)  
 JACKET FLAWS:  
 Spark Test, 1000 volts (rms), 60 Hz, 100% test  
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours  
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours  
 SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):  
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color.  
 Example: AWG 20, white, black and red component wires; white jacket: 55A1131-20-9/0/2-9

NOTE: Nominal values are for information only.  
 Nominal values are not requirements.

COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL.