


DWG. NO.  
SD-52602-001

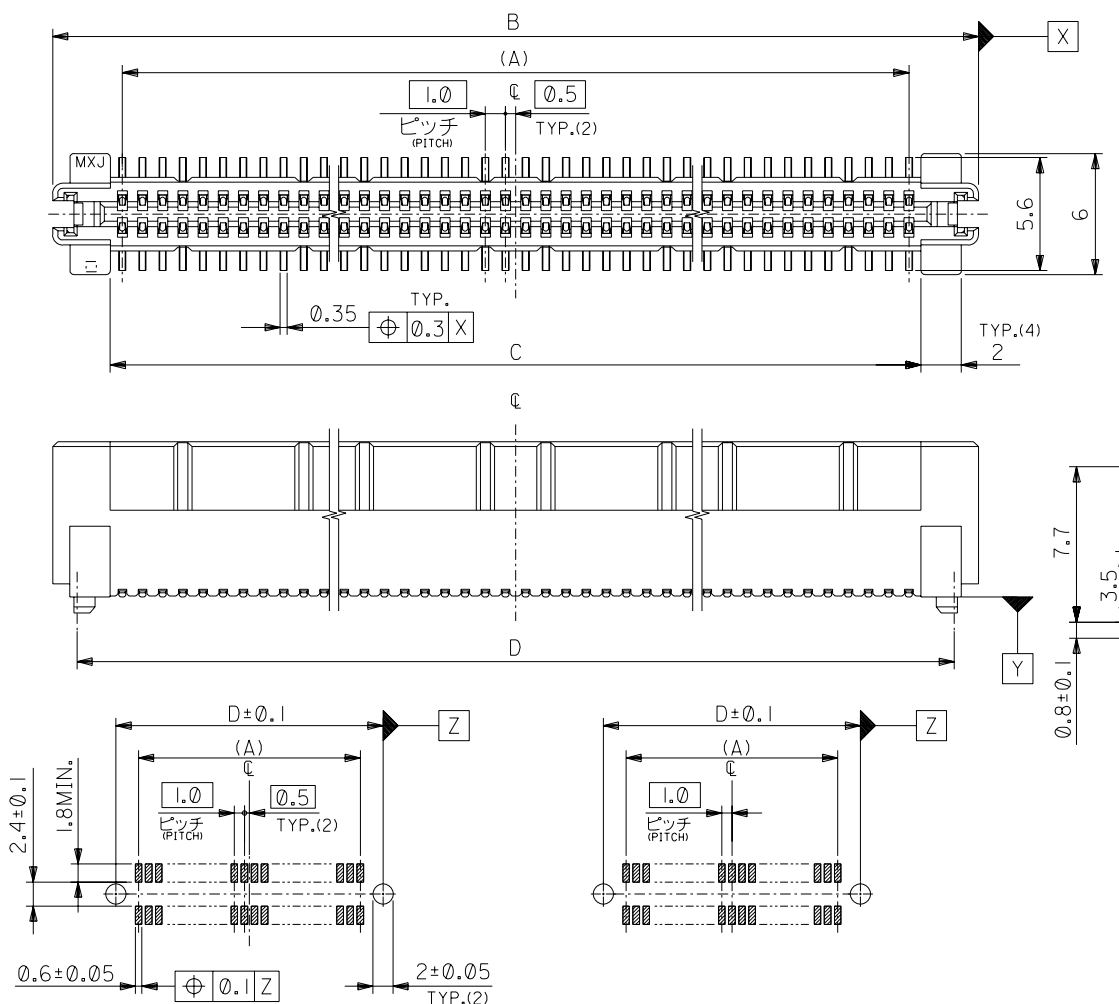

- 注) NOTES
1. 材質 MATERIAL  
ハウジング: ガラス入りLCP、白色、UL94V-0  
HOUSING: G.F.LCP, WHITE, UL94V-0  
ターミナル: 燐青銅 (t = 0.2)  
TERMINAL: PHOSPHOR BRONZE
  2. メッキ仕様 PLATING  
接点部: 金メッキ 0.25 μm以上  
CONTACT AREA: GOLD 0.25 μm MIN.  
半田付け部: 錫メッキ 1.0 μm以上  
SOLDER TAIL AREA: TIN 1.0 μm MIN.  
下地メッキ: ニッケルメッキ 2.0 μm以上  
UNDER-PLATING: NICKEL 2.0 μm MIN.
  3. 推奨基板厚 RECOMMENDED PCB THICKNESS  
1.0 ± 0.1 mm MIN.
  4. テールのバラツキ寸法 TAIL COPLANARITY  
テールは、Y面を基準とし、上へ0.02 下へ0.15の範囲にのみ、且つテール平坦度は0.15とする。  
TAILS TO BE WITHIN 0.02 UPWARD AND 0.15 DOWNWARD FROM Y-DATUM PLANE, AND TAIL COPLANARITY TO BE 0.15.
  5. ロックは、24, 50極に設置する。 LOCK TO BE ADDED TO 24 AND 50 CKTS.
  6. 梱包 PACKAGING  
本製品はスティック梱包とし梱包後の MATERIAL NO. は 52602-\*\*\*79とする。  
THIS PRODUCT IS TO BE PACKED IN TUBE. MATERIAL NO. 52602-\*\*\*79
  7. 同一基板内に複数個 (2ヶ以上) の使用は避けてください。  
MXJ DOSE NOT RECOMMEND THE USAGE OF TWO OR MORE OF THESE CONNECTORS BETWEEN A SINGLE PAIR OF P.C.B. BOARD.
  8. 本製品は、52602-\*\*\*0の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52602-\*\*\*0.

推奨基板寸法 (24, 60, 120, 140極)  
RECOMMENDED PCB PATTERN LAYOUT (24, 60, 120, 140 CKTS.)

推奨基板寸法 (50極)  
RECOMMENDED PCB PATTERN LAYOUT (50 CKTS.)

73.5	70.2	75.9	69	52602-1470	140
63.5	60.2	65.9	59	52602-1270	120
33.5	30.2	35.9	29	52602-0670	60
28.5	25.2	30.9	24	52602-0570	50
15.5	12.2	17.9	11	52602-2470	24
D	C	B	(A)	MATERIAL NO.	極数 NO. OF CIRCUITS

DO NOT SCALE DRAWING

EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		RELEASED '04/03/10 EC NO. J2004-2974 DRWN: Y.SAKIYAMA CH'K: M.SASAO APPR: M.SASAO		MATERIAL 材料 SEE NOTES		GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差		SCALE 1:1 DESIGN UNITS mm INCH		MODEL NO. 52602-***70		DIMENSIONS: SHT REV	
EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		FINISH 仕上げ SEE NOTES		10 UNDER 未満 ±0.2		10 OVER 30 UNDER 未満 ±0.25		30 OVER 以上 ±0.3		DRAWN BY & DATE Y. Sakayama '04/03/10		TITLE: 1.0 B/B S/T REC. HS'G ASS'Y -LEAD FREE-	
EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		WIRE RANGE 適用電線範囲 //		ANGLE 角度 ±3°		CAD FILENAME SD-52602-001.S01		MATERIAL NO. SEE CHART		DRAWING NO. SD-52602-001		SHEET NO. 1 OF 1	
EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		EC NO. DRAWN: CH'K: APPR:		INS. RANGE 被覆外径 //		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		SIZE B		EN-02J(097) MXJ-54					

7

6

5

4

3

2

1

E

E

D

D

C


C

B

B

A

A

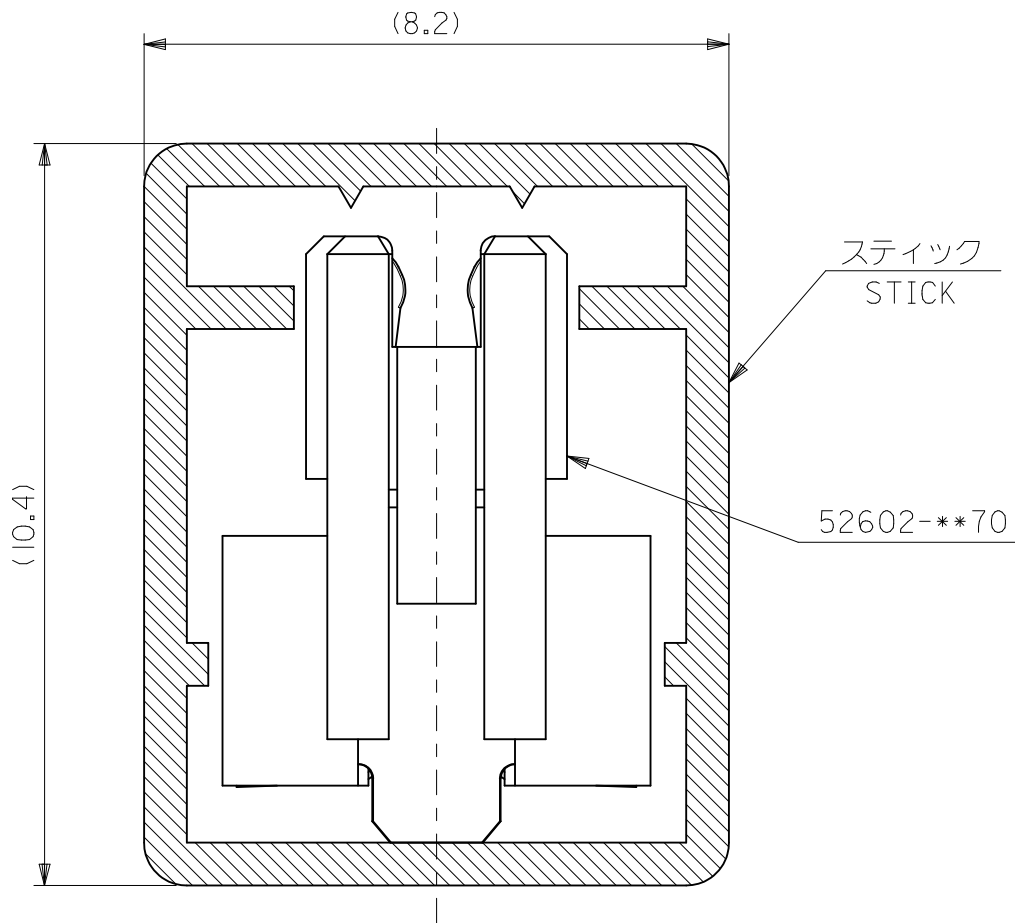

注記  
NOTES

1. スティック両端はキャップ止め。  
BOTH ENDS WITH CAPS.
2. 全 長: 600±2  
TOTAL LENGTH
3. 肉 厚: 0.6±0.2  
THICKNESS
4. 本製品は、52602-\*\*\*9 の鉛フリー品である。  
THIS PRODUCT IS LEAD FREE OF 52602-\*\*\*9.

8	52602-1279	120
15	52602-0679	60
18	52602-0579	50
31	52602-2479	24

52602-***79	MODEL NO.	梱包数 QUANTITY	MATERIAL NO.	極数 NO. OF CIRCUITS
-------------	-----------	-----------------	--------------	-----------------------

REVISED EC NO: J2011-1534 DRWN:TKAKIMOTO 2012/04/20 CHKD:THARUYAMA 2012/04/23 APPR:HIRATA 2012/06/07	GENERAL TOLERANCES (UNLESS SPECIFIED)	
	10 UNDER	±---
	10 OVER 30 UNDER	±---
	30 OVER	±---
DESCRIPTION	ANGULAR ±--- °	
REV	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE MM ONLY	SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION
DRAWN BY YSAKIYAMA	DATE 2004/03/10	TITLE STICK PACKAGE FOR 52602-***70 -LEAD FREE-	
CHECKED BY MSASAO	DATE 2004/03/10	<b>molex</b>	
APPROVED BY	DATE		
MATERIAL NO.	DOCUMENT NO. SD-52602-002	SHEET NO. 1 OF 1	
SIZE A4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

材料  
MATERIAL  
スティック : ポリ塩化ビニル  
STICK : P.V.C

6

5

4

3

2