


COIL: @ +25 °C
 RESISTANCE 700 OHMS ± 10%
 NOMINAL VOLTAGE 26.5 VDC
 MUST OPERATE 13.5 VDC
 MUST RELEASE 1.5 VDC

ENVIRONMENT:
 VIBRATION 10 CPS TO 2000 CPS @ 20 g's
 SHOCK 100 g's 6 MS. DURATION
 TEMPERATURE -65 °C TO +125 °C

NOTES: OPERATE 4 MS MAX.
 RELEASE 2 MS MAX.
 BOUNCE 3 MS MAX.

CUSTOMER DATA SHEET

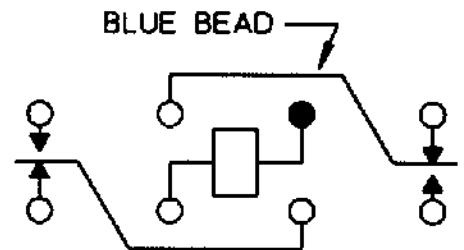

CONTACT RATING: LOW LEVEL TO 2A
30 VDC RESISTIVE 100,000 OPERATIONS
 MIN.

DR. R.B. 5/19/92 CK. 5/20/92 JRB



CUST. HI-G
 CUST. NO. ZK-2C-126

TYPE "HFV" RELAY

HFV1240S01