


TABLE 1	
MODEL NUMBER	LENGTH
415-0532-MM200	200mm ±6
415-0532-MM250	250mm ±6

REV	ECO	DATE
1	INITIAL RELEASE	6/24/2021

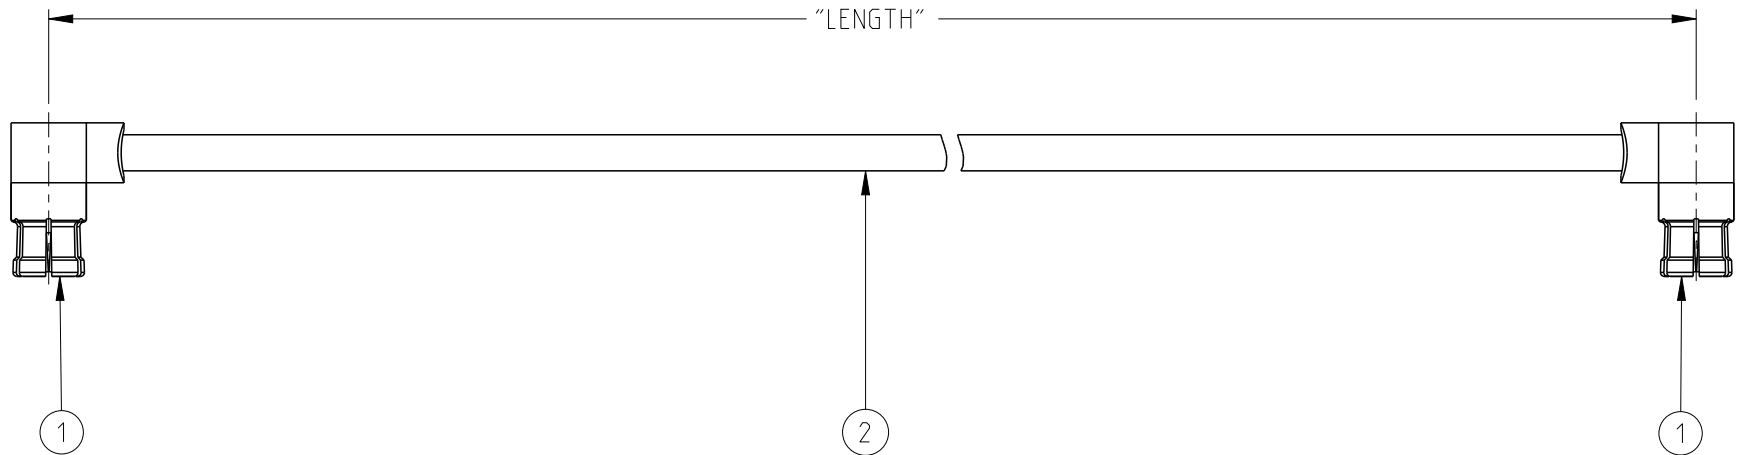

NOTES: UNLESS OTHERWISE SPECIFIED.

1. CABLE ASSEMBLY DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS FOR A PERIOD OF ONE MINUTE.
2. CABLE ASSEMBLIES TO BE 100% TESTED FOR VOLTAGE AND CONTINUITY.
3. VSWR: 1.50 MAX DC-26.5GHz

PART LIST		
ITEM	QTY	DESCRIPTION
1	2	SMPM RA FEMALE
2	AR	CABLE

<p>This PROPRIETARY Document is property of Cinch Connectivity Solutions. It is confidential in nature, non-transferable, and issued with the clear understanding that it is not traced or copied without permission and is returnable upon demand.</p> <p>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</p>	Model No: 415-0532-MXXXX	JOHNSON		
	RoHS <input checked="" type="checkbox"/> (EU)/2015/863 COMPLIANT	Cage Code 	Title: CABLE ASSY, METRIC. SMPM RA FEMALE TO SMPM RA FEMALE, .047" SEMI-RIGID	
	UNLESS OTHERWISE SPECIFIED UNITS: INCH .XX ± .01 .XXX ± .003 .XXXX ± .0010 ANGLE ± 2°	3RD ANGLE PROJECTION 	Drawing No. 415-0532-MXXXX	REV. 1
	Drawn by: ROMAN YAO Date: 6/24/2021	Size A	DO NOT SCALE DRAWING	Workmanship Std/Sheet NONE 1 OF 1