

CTLV2510SF Series

From 0.47µH to 22µH



CHARACTERISTICS

- Description:** SMD power inductors sealed with magnetic resin.
- Applications:** Smart phones, DSC, Tablet PC's, DC/DC converters, etc.
- Operating Temperature:** -55°C to +125°C (including self - temperature rise)
- Inductance Tolerance:** ±20%, ±30%
- Testing:** Inductance is tested on an HP4284A at 1.0MHz, 200mV
- Packaging:** Tape & Reel.
- Marking:** Parts are marked with letter code.
- Miscellaneous:** **RoHS Compliant.**
- Additional Information:** Additional electrical & physical information available upon request.
- Samples available. See website for ordering information.**


SPECIFICATIONS

Please specify inductance tolerance code when ordering.
 CTLV2510SF-R47_ ← M = ±20%, N = ±30%
 *Isat: For inductance drop 30% from its value without current.
 **Irms: For a 40°C rise above 25°C ambient.

Part Number	Inductance (µH)	L Test Freq. (MHz)	DCR ±30% (Ω)	*Isat Typ.(Max.) (A)	**Irms Typ.(Max.) (A)
CTLV2510SF-R47_	0.47	1.0	0.045	2.80(2.52)	2.30(2.07)
CTLV2510SF-1R0_	1.0	1.0	0.066	1.98(1.78)	2.05(1.84)
CTLV2510SF-1R5_	1.5	1.0	0.095	1.70(1.53)	1.85(1.66)
CTLV2510SF-4R7_	4.7	1.0	0.285	0.92(0.82)	0.95(0.85)
CTLV2510SF-100_	10	1.0	0.535	0.60(0.54)	0.70(0.63)
CTLV2510SF-150_	15	1.0	0.810	0.50(0.45)	0.55(0.49)
CTLV2510SF-220_	22	1.0	1.200	0.40(0.36)	0.44(0.39)

PHYSICAL DIMENSIONS

Size	A	B	C	D
mm	2.5±0.25	2.0±0.25	1.02	0.8
inches	0.098±0.010	0.079±0.010	0.040	0.031

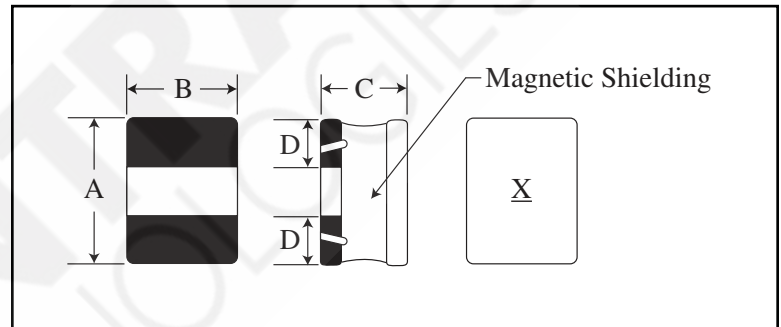

PAD LAYOUT

