




UNIT: mm

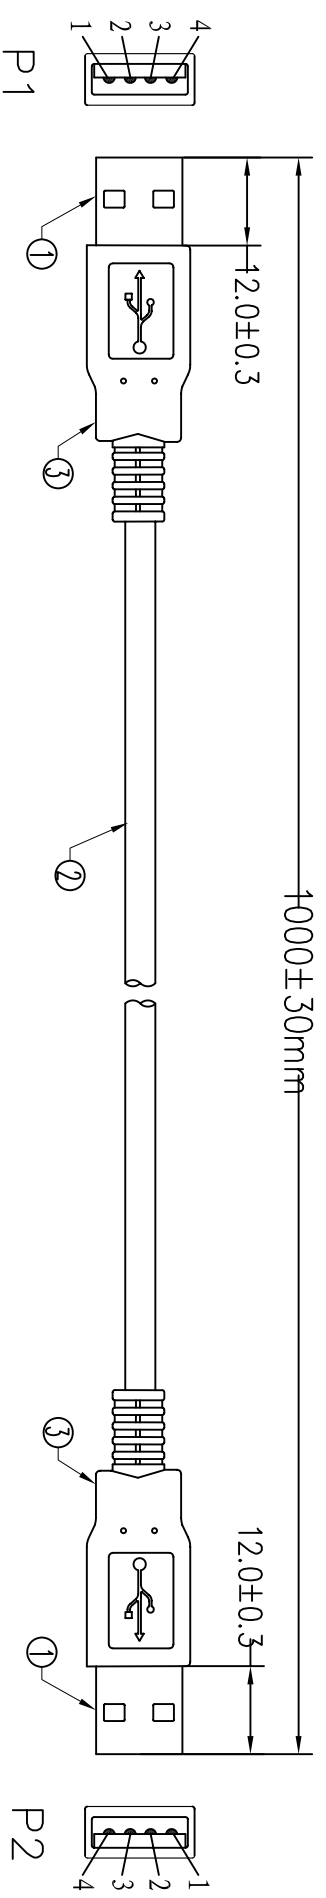

CABLE BLACK PRINT  
 USB CABLE E189529 **PA** AWM 2725 28AWG/1PR AND  
 24AWG/2C 80°C 30V VW-1

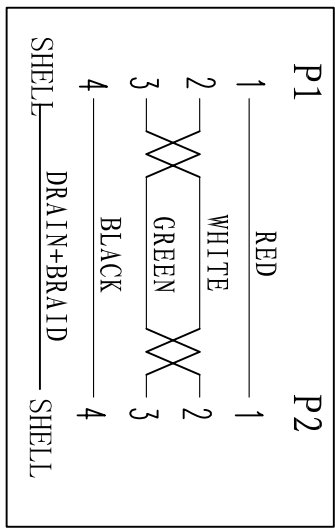

**Electrical test:**  
 1. 100% short open miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 5Mohm(min)  
 4. dielectric test: DC 300V

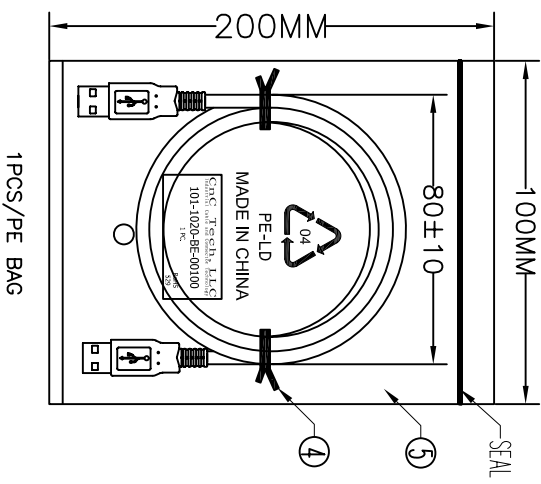

⑥	PE BAG	1/10	CLEAR SIZE: 230*300*0.05mm	PRINT BLACK	"MADE IN CHINA" + "10PCS"
⑤	PE BAG	1	CLEAR SIZE: 100*200*0.05mm	PRINT BLACK	"MADE IN CHINA" + "1PC"
④	TIE	2	WHITE	L=80mm	
③	OUT JACKET	12g	BELGE (1V-29#)	PVC-40P (MOULD NO: NM-40)	
②	CABLE	1	BELGE (1V-29#)	USB1.1 UL2725 28#/1P+24#/2C+4EB OD: 4.7mm L=1000+10/-0MM	
①	CONN	2set	USB A MALE SHELL-NICKEL	PIN G/F INSULATION COLOR WHITE	3PCS TYPE
NO.	NAME	Q'TY	SPECIFICATION		

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	Andy	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	101-1020-BE-00100
DECIDED		DATE	2013-8-23
VERSIONS/EDITION	A/0	PROJECTION	

4 3 2 1

1