

5

4



3

2

1


SPECIFICATION



| | |
|-----------------------|------------|
| Performance level | PL2 |
| Capacitance | 1000pf±20% |
| Working Voltage | 100v |
| Current Rating | 7.5A |
| Insulation Resistance | >1GΩ |

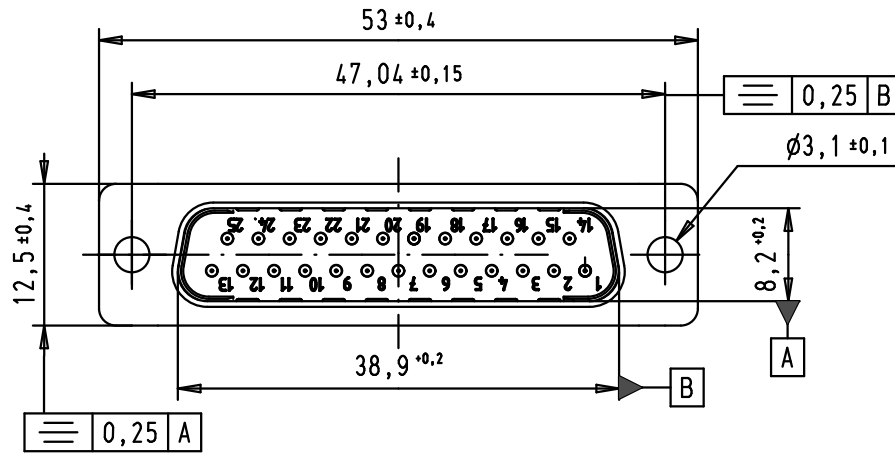

Solder buckets for AWG 20

| FREQUENCY (MHz) | ATTENUATION dB |
|-----------------|----------------|
| 5 | 1dB |
| 10 | 3dB |
| 50 | 12dB |
| 100 | 20dB |
| 500 | 34dB |
| 1000 | 30dB |

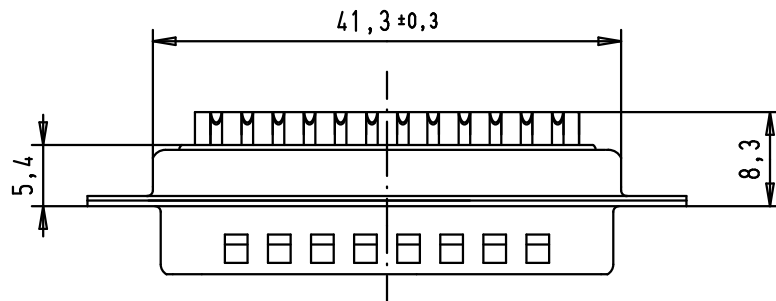

| | | | | | | | | |
|-------|----------|------|-------------------------------|----------|------|---|--|-----------------------------|
| | | | | Dat. | Name |  All Dim. in mm Orig. Size DIN A 4 | D-Sub, male, Straight 25 Poles, turned solder buckets, with dimples and holes | No?Mstab/ Scale 1.5:1 |
| | | | Detail. | 8-JUL-02 | CV | | | |
| | | | Insp. | 12/01/12 | JB | | | |
| | | | Stand. | | | | | |
| 36283 | 12/01/12 | SD | | | |  | TB 09643217230 | Blatt/ Page 1 / 1 |
| 33423 | 06/02/06 | JMDR | | | | | | |
| 31058 | 8-JUL-02 | CV | | | | | | |
| Mod. | Dat. | Name | HARTING EURL F-95972 Paris | | | Sub. | | |

D

C

B

A