

## Device connector, front mounting - SM-5EPWN8AAD00 - 1605798

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Device connector, front mounting, angled rotatable, Screw locking, M40, Number of positions: 2+3+PE, Type of contact: Male connector, Crimp connection, Axial O-ring, 4xØ4,4, Shielded: Yes, Flange dimensions: 40 mm x 40 mm, Cable cross section: 0 mm...0 mm

The illustration shows the 8-position version of the product



### Key commercial data

|                                      |            |
|--------------------------------------|------------|
| Packing unit                         | 1 PCE      |
| Weight per Piece (excluding packing) | 118.56 GRM |
| Custom tariff number                 | 85366990   |
| Country of origin                    | Germany    |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 272607xx |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260708 |
| eCl@ss 7.0 | 27440312 |
| eCl@ss 8.0 | 27440312 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001121 |
| ETIM 4.0 | EC001121 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 43172015 |
| UNSPSC 7.0901 | 43201404 |

# Device connector, front mounting - SM-5EPWN8AAD00 - 1605798


## Classifications

### UNSPSC

|              |          |
|--------------|----------|
| UNSPSC 11    | 43172015 |
| UNSPSC 12.01 | 43201404 |
| UNSPSC 13.2  | 43201404 |


## Drawings

Dimensioned drawing

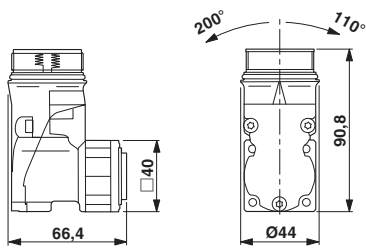

SM-...PWN8AAD00

Dimensioned drawing

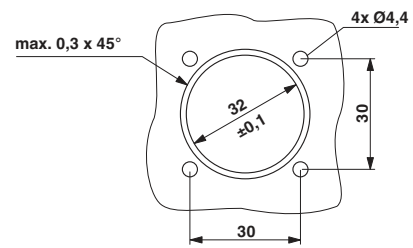

Installation dimensions SM-...PWN8AAD00