

NOTES:


1. METALSHELLS: STEEL; min. 315µin TIN over 40-80µin NICKEL
2. INSULATORS: PBT GF UL 94 V-0; BLACK
3. CONTACTS: COPPER ALLOY; PLATING (SEE PART NO.):
 PLEASE ADD A for GOLD FLASH over NICKEL (PREFERRED TYPE)
 PLEASE ADD B for 20µin HARD GOLD over min. 50µin NICKEL
 PLEASE ADD C for 30µin HARD GOLD over min. 50µin NICKEL
4. METAL BRACKETS: STEEL;
min. 320µin TIN over 80µin NICKEL
5. THREADED LOCKS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
6. PCB-SNAPS: COPPER ALLOY; min. 200µin TIN over 80µin NICKEL
7. FIXING-PLATE: PBT GF UL 94 V-0; BLACK
8. P.C.B. HOLE DRILLINGS ON SHEET 2
9. MAXIMUM TORQUE VALUE FOR THREAD: 6 in.LB
10. CONNECTOR IS PART MARKED: '164□18659X CONEC ABC' (see note 3)


Directive 2002/95/EC RoHS compliant

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND	tolerance		dim. in mm		scale: 2:1(5:1)	
					material: SEE NOTES	
	drawn	07.04.14	Lehmenkühler		title: D-SUB HD FEMALE 90° 78pos. SOLDER PIN ANGLED 0.350inch with threaded lock,metal bracket,fixing-plate and snap	
	appd.	08.04.14	Schmidt			
	norm					
	d-old					
	a	Original	CONEC ®		dwg no: 16K1A3422	
	rev.	description			part no: 164□18659X (see note 3)	
					DIN-A3	
					sh: 1	

P.C.B. HOLE DRILLINGS

(P.C.B. TOP SIDE)

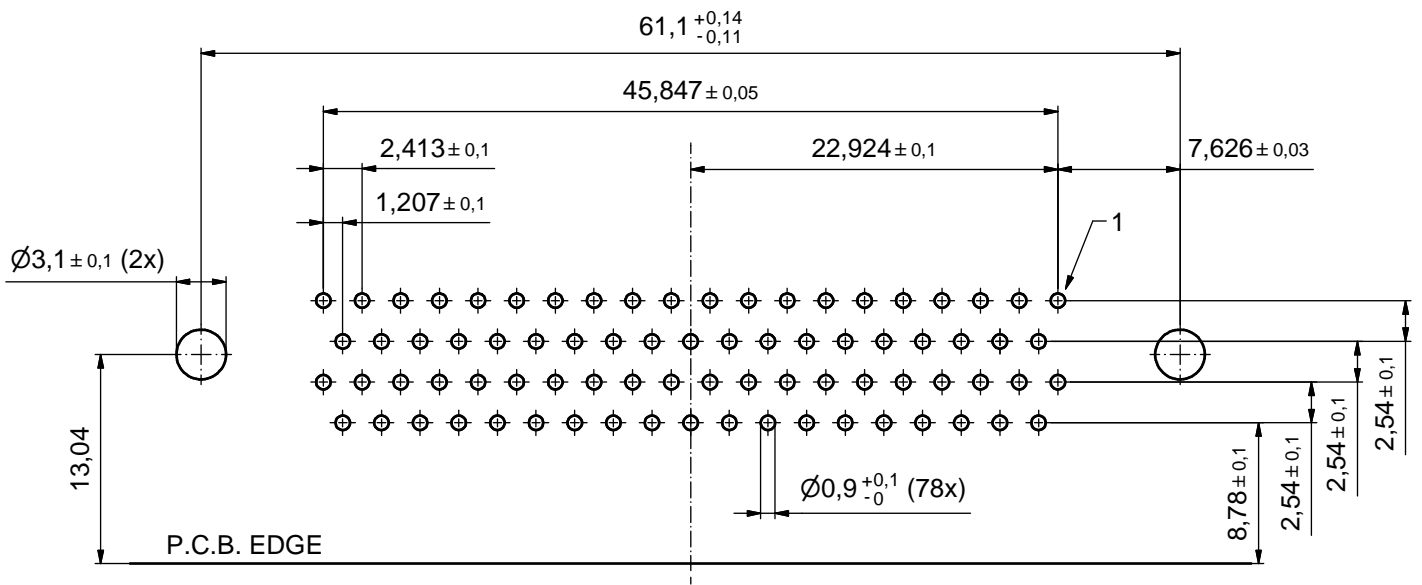

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH DO NOT ALTER CAD DRAWING BY HAND					tolerance		 dim. in mm	scale: 3:1	
					date			material: SEE SHEET 1	
					name		title:		
					drawn		P.C.B. HOLE DRILLINGS		
					appd.		D-SUB HD FEMALE 90° 78pos. ANGLED 0.350inch with threaded lock, metal bracket, fixing-plate and snap		
					norm		dwg no:		
					d-old		16K1A3422		
				a		Original		DIN-A3	
				rev.		description		sh: 2	
				date		name		part no: SEE SHEET 1	
						CONEC ®			