


# 11U8G (DC ~ 8GHz)

## Construction

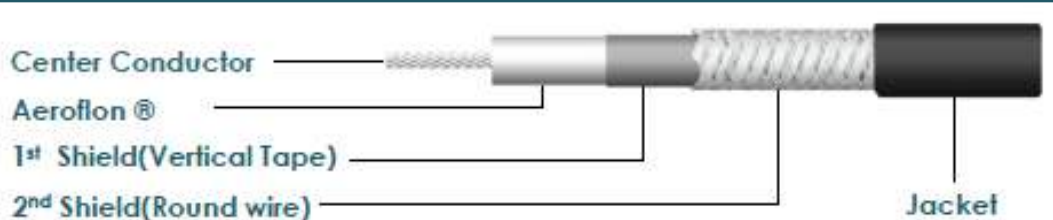

Part	Material	Diameter	
1	Center Conductor	Silver Plated Copper [Stranded]	$\Phi$ 19 / 0.225 [mm] $\Phi$ 19 / 0.0088 [inch]
2	Dielectric	Aeroflon ® [Extruded]	
3	1 <sup>st</sup> / 2 <sup>nd</sup> Shield	Mylar tape & Copper wire	
4	Jacket	PUR	$\Phi$ 5.20 ± 0.1 [mm] $\Phi$ 0.204 ± 0.003 [inch]

## Electrical & Mechanical specification

Characteristic Impedance	50 ± 1 Ω
Operating Frequency	DC to 8 GHz
Temperature	-50 °C ~ +85 °C
Velocity of Propagation	77% nominal
Minimum Bend Radius	25 mm / 0.98 inch
Weight [g/m]	53.3
Shielding Effectiveness	<-100 dB
Phase Stability vs. Flexure	2° max. @8GHz
Loss Stability vs. Flexure	Δ 0.05dB to 8GHz
Available Connector	SMA / N

Connector 1	SMAMST
Connector 2	SMAMST
Insertion Loss Typ. (@ Max Freq.)	1.27 dB/m
Insertion Loss Guarantee (@ Max Freq.)	1.38 dB/m

Microwave Cable

DC ~ 8GHz phase stable cable