







REVISIONS					
REV	ECO	DESCRIPTION	DATE	BY	APPR
A	-	RELEASED FOR PRODUCTION	12DEC14	JAH	

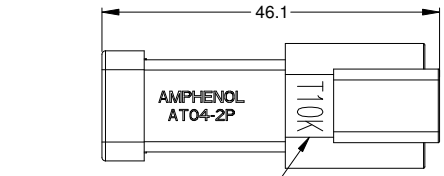

LASER MARK "T10K"
THERMISTOR RESISTANCE

CONTACT: AT60-202-16141
2X


SOLID REAR SEAL

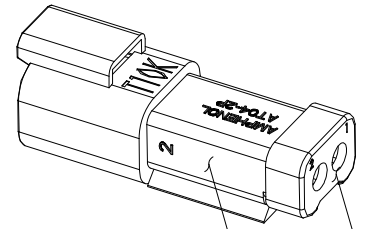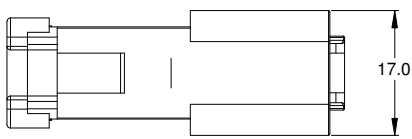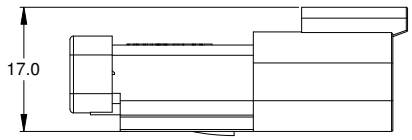

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:
HOUSING: THERMOPLASTIC
SEAL: SILICONE RUBBER
- MODIFICATIONS: END CAP, COLOR, SOLID SEAL, CONTACTS, THERMISTOR, WEDGE AW2P, LASER MARKING.
- SPECIFICATIONS:
3.1 CURRENT RATING: 13 AMPS
3.2 OPERATING TEMPERATURE: -55°C TO +125°C
3.3 CONTACT SIZE: 16
3.4 MOISTURE RESISTANCE: IP67 (MATED CONDITION)
3.5 MATING CYCLE DURABILITY: 100 CYCLES
3.6 RoHS COMPLIANT
- MATING PART: AT06-2S* PLUG
(* = MODIFICATIONS AND COLORS)
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

WIRING DIAGRAM



QUANTITY	PART NUMBER	DESCRIPTION	ITEM
MATERIALS LIST			
UNLESS OTHERWISE SPECIFIED		SIGNATURES	DATE
1) All dimensions are in metric(mm).		J.HEAD	22JUL14
2) Tolerances are as follows:		CHECKED:	
1 PL DEC ±0.30 Fractions ±1/64		ENGINEER:	
2 PL DEC ±0.15 Angles ±1°		APPROVAL:	
3 PL DEC ±0.08		CUSTOMER:	
3) Note reference =		THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS.	
MATERIAL SPECIFICATIONS:		RECEIPT, 2 WAY "AT", 10K NTC B=3892K, RED	
PROCESS SPECIFICATIONS:		SIZE	REVISION
NEXT ASSY:		B C-	A
		DWG NO:	AT04-2P-THM10K
		SCALE:	NONE
		SHEET	1 OF 1

TITLE: RECEIPT 2 WAY "AT", 10K NTC B=3892K, RED
DWG NO: AT04-2P-THM10K
REV: A
SH: 1
OF: 1