


MATERIALS AND FINISHES

N PLUG :  
SEE SD-73276-067

CABLE : LMR240 OR EQUIVALENT

SHRINK TUBE : RAYCHEM ATUM OR EQUIVALENT

CAP VINYL

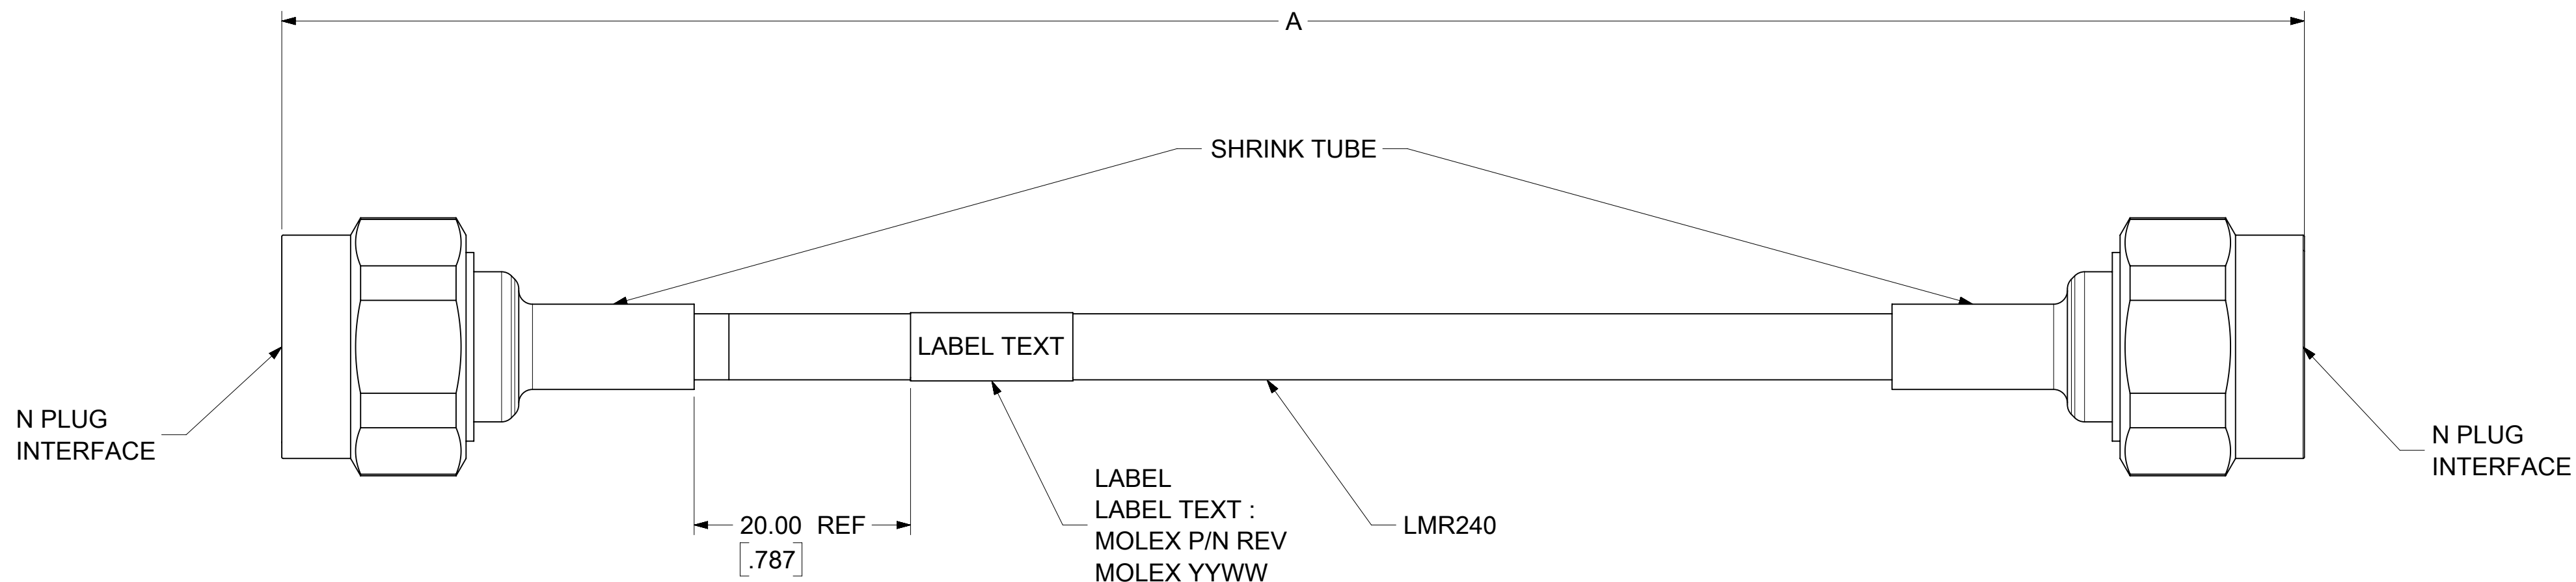

100% HI-POT AND CONTINUITY TESTED  
TYPICAL RETURN LOSS : 16 dB AT 6GHz

RoHS COMPLIANT

73230-5402	36.00±.5	914.40±12.7
73230-5401	24.00±.5	609.60±12.7
73230-5400	12.00±.5	304.80±12.7
PART NO.	IN	MM
	A	

MIL-STD-348A. FIG. 304.1	INTERFACE
SPECIFICATION	DESCRIPTION

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_C = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	CURRENT REV DESC:			
	DIMENSION UNITS: <b>MM/INCH</b> SCALE: <b>11:5</b>	EC NO: 676515 DRWN: MYLU07 2021/06/22 CHK'D: YHUANG11 2021/09/07 APPR: LCHEN03 2021/09/07			N PLUG STR TO N PLUG R/A LMR240 TO N PLUG R/A LMR240 CA-N/N, EWR14556
	GENERAL TOLERANCES (UNLESS SPECIFIED) ANGULAR TOL ± 2.0° 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± 0 PLACES ±	INITIAL REVISION: DRWN: MYLU07 2021/06/22 APPR: LCHEN03 2021/09/07			PRODUCT CUSTOMER DRAWING
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION 	DRAWING: <b>C-SIZE</b> SERIES: <b>73230</b>		DOCUMENT NUMBER: <b>732305400</b> DOC TYPE: <b>PSD</b> DOC PART: <b>000</b> REVISION: <b>A</b>
DOCUMENT STATUS: <b>P1</b> RELEASE DATE: <b>2021/09/07 09:32:56</b>	MATERIAL NUMBER: <b>73230</b> CUSTOMER: <b>GENERAL MARKET</b>	SHEET NUMBER: <b>1 OF 1</b>			