


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
	E	REV PER ECO-12-013186	18JUL12	PY	DE		

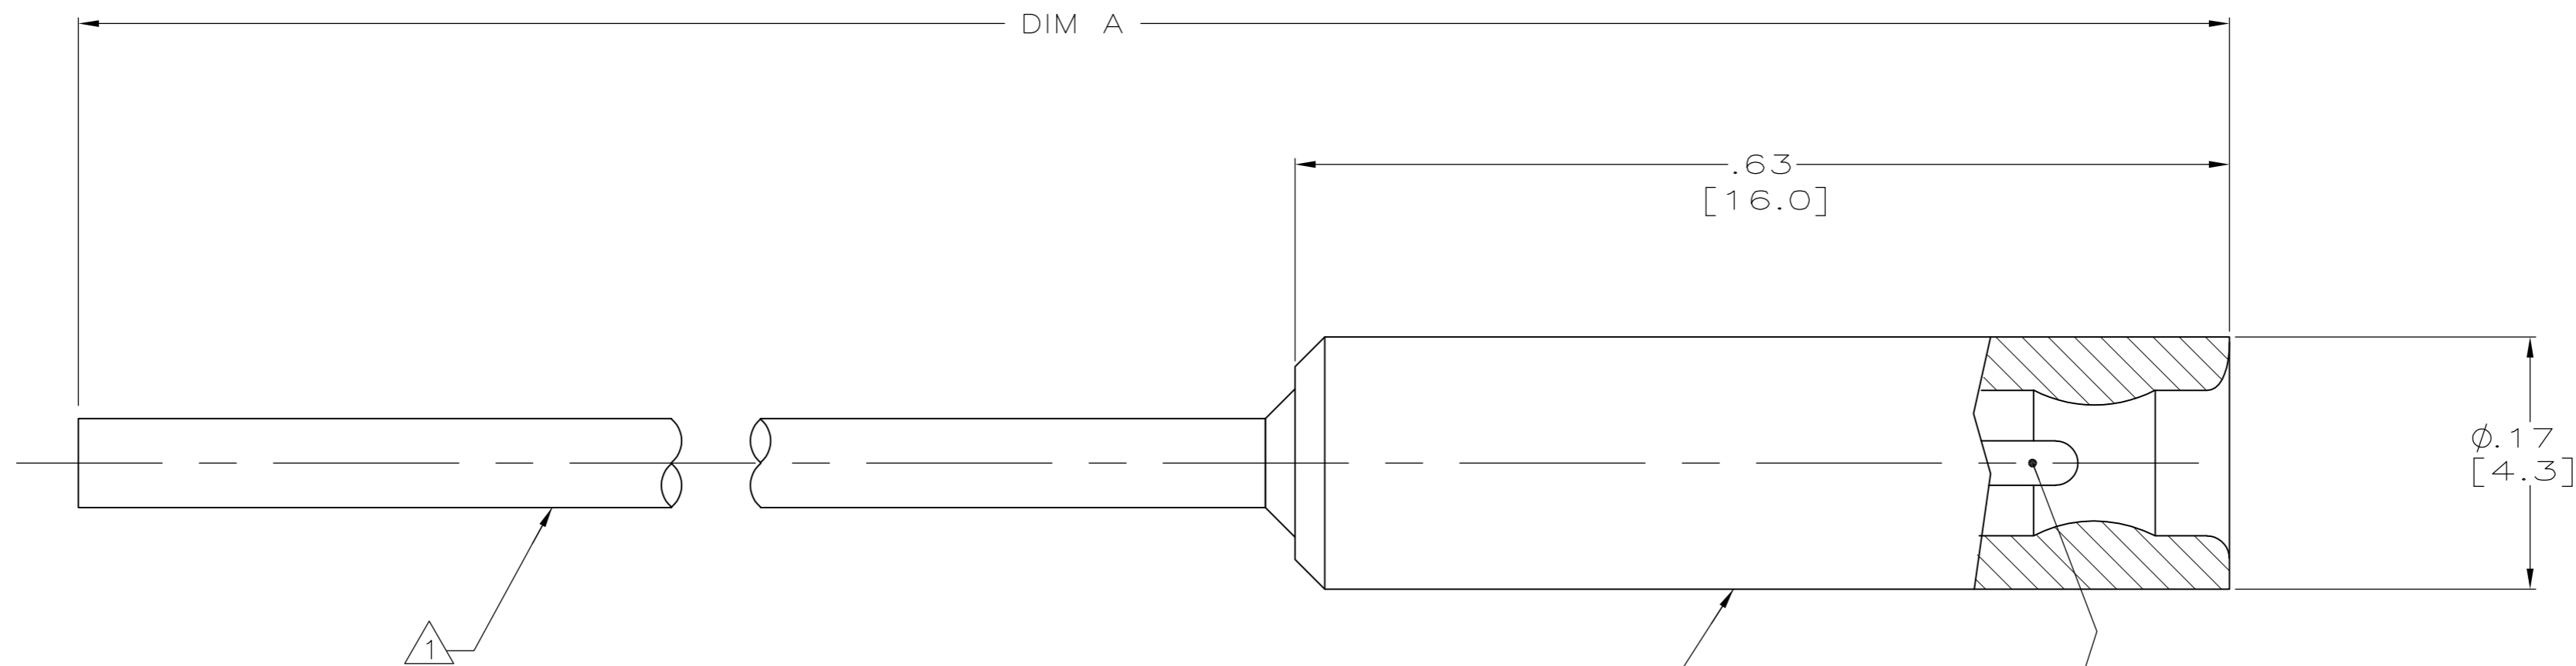

SILICONE RUBBER PER ZZ-R-765

SIZE 22 PIN CONTACT  
 MAT'L: BRONZE PER ASTM-B-140  
 FINISH: GOLD OVER NICKEL

REMARKS	DIM A	WIRE DESCRIPTION	PART NUMBER
OBSOLETE	15.00±12 [381.0±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-5
	12.50±12 [317.5±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-4
	72.00±72 [1828.8±18.3]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-3
	48.00±48 [1219.2±12.2]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-2
	12.50±12 [317.5±3.0]	#24 GA SILICONE COATED FEP .060 O.D. COLOR: RED	1218148-1

- 1. OPERATING VOLTAGE: 6 KVDC  
 TEMPERATURE RANGE: -55° C TO +125° C  
 ALTITUDE: SEA LEVEL TO 70,000 FEET
- 2. THIS RECEPTACLE WILL MATE WITH AMP PART NO. 1218147.
- 3. 100% TESTING FOR DWV AND PARTIAL DISCHARGE PER RAYTHEON SPEC. G718649, GROUP A.
- 4. 100% TESTING FOR DWV AND PARTIAL DISCHARGE PER RAYTHEON SPEC. G719581, GROUP A.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.C.THOMAS	2-11-98	<b>STE</b> TE Connectivity
CHK	D.EABY	2-11-98	
APVD	D.EABY	2-11-98	
PRODUCT SPEC			
APPLICATION SPEC			NAME RECEPTACLE, MICRO-MIN, LGH
WEIGHT	-		SIZE A2 CAGE CODE 00779 DRAWING NO. 1218148 RESTRICTED TO -
CUSTOMER DRAWING	SCALE 10:1	SHEET 1 OF 1	REV E