




1. Mechanical Dimensions:




TOP VIEW



SIDE VIEW



BOTTOM VIEW

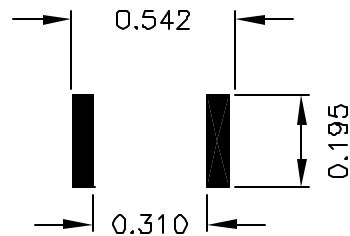


Typical Pad Layout

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen Index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 2

DOC. REV: A/3

2. Schematic:



3. Electrical Specifications: @25°C

OCL: 0.82µH±20% @100KHz, 0.25V OADC

DCR: 2.3 mOhms Max

Irated: 31.0A (Based on 40°C Temp Rise)

I_{sat}: 53.0A (Based on 20% drop in OCL)

PROPRIETARY Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.

XFMRS Inc	Title: XFHCL4 SERIES INDUCTORS		
	UNLESS OTHERWISE SPECIFIED	P/N: XFHCL4-R82M	REV. A
TOLERANCES: N/A	DWN.	刘鹏	Aug-16-04
Dimensions in Inch	CHK.	李小锋	Aug-16-04
SHEET 1 OF 1	APP.	J Ng	Aug-16-04