


REVISIONS				
P	LR	DESCRIPTION	DATE	BY
B	REV:	40033535MCO	28SEP2016	CG TE

- 1 MAXIMUM CONNECTOR INSERTION LOSS IS 0.5 DB PLUS CABLE ATTENUATION OF 1.5dB/km AT 1300nm (SEE TABLE)
- 2. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702

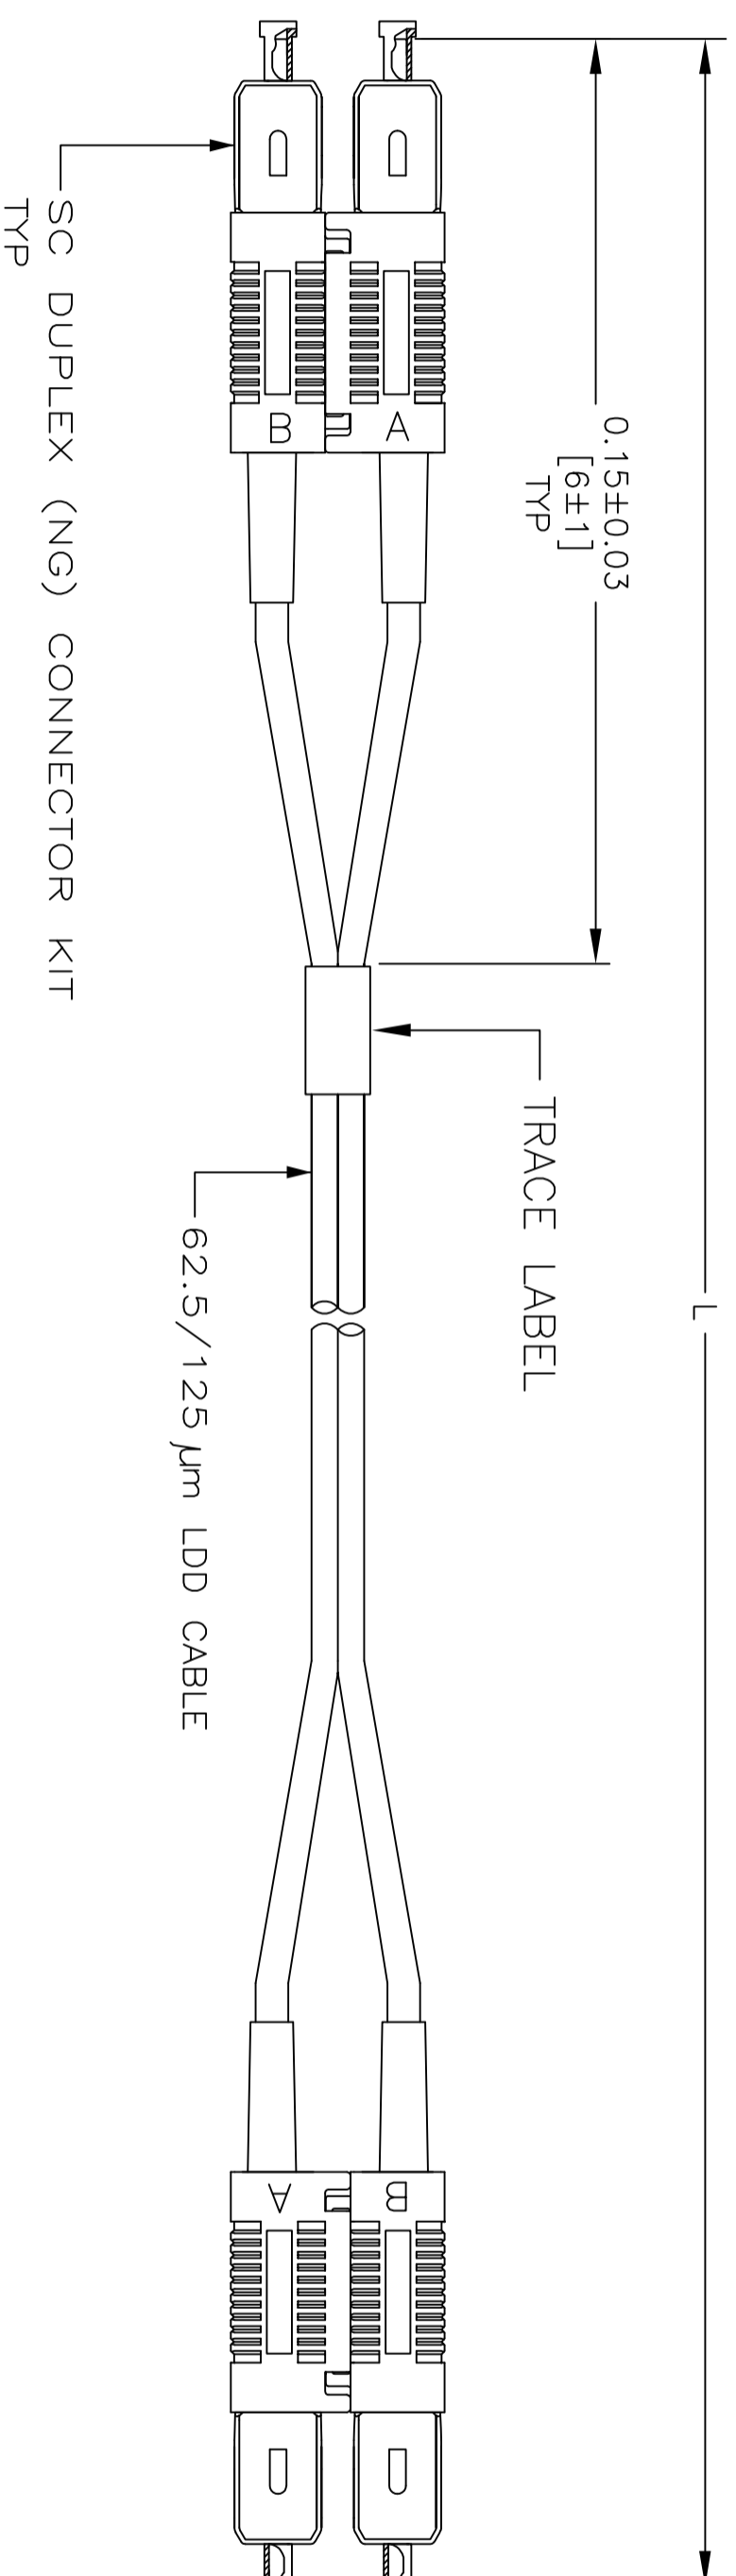

0.95	300.00±3.00 [11811.02±118.11]	9-5492249-9
0.65	100.00±1.00 [3937.01±39.37]	9-5492249-8
0.55	35.00±0.35 [1377.95±14.00]	3-5492249-5
0.55	30.00±0.30 [1181.10±11.81]	3-5492249-0
0.54	25.00±0.30 [984.25±11.81]	2-5492249-5
0.53	20.00±0.30 [787.40±11.81]	2-5492249-0
0.52	15.00±0.15 [590.60±6.00]	1-5492249-5
0.52	10.00±0.15 [393.70±5.91]	1-5492249-0
0.51	8.00±0.15 [315.00±6.00]	5492249-8
0.51	6.00±0.08 [236.20±3.00]	5492249-6
0.51	5.00±0.08 [196.85±3.15]	5492249-5
0.50	3.00±0.05 [118.11±1.97]	5492249-3
0.50	2.00±0.05 [78.74±1.97]	5492249-2
0.50	1.00±0.05 [39.37±1.97]	5492249-1
MAX IL (DB)	L	PART NUMBER

5492249

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN C.S. VASU 25 OCT 05

CHK J. DUNCAN 25 OCT 05

APRD J. DUNCAN 25 OCT 05

NAME CABLE ASSEMBLY, 62.5/125 LDD, AMP SC DUPLEX (NG), OPTIMATE

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SIZE A2

QAGE CODE 00779

DRAWING NO. 5492249

SCALE NTS

SHEET 1 OF 1

REV B

COMMSCOPE, INC.

RESTRICTED TO

5492249