




# Shielded High Current Power Choke

# PCXLR402

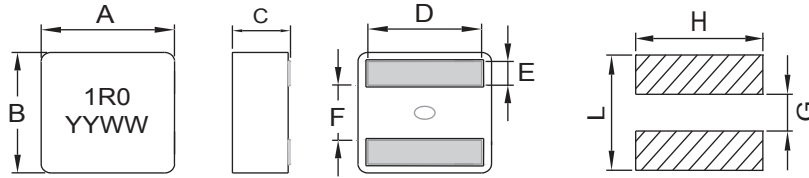

Dimensions: Inches (mm)

A	B	C	D	E	F
.161±.008 (4.1±0.2)	.161±.008 (4.1±0.2)	.075±.008 (1.9±0.2)	.134±.012 (3.4±0.3)	.035±.008 (0.88±0.2)	.063±.010 (1.6±0.25)

Recommend PCB Layout

L	G	H
.134 (3.4) Ref	.055 (1.4) Ref	.150 (3.8) Ref



Allied Part Number	Inductance (μH) ±20% @ 0A	DCR (mΩ) Typ.@25°C	DCR (mΩ) Max@25°C	Irms (A) Typ.		Isat (A)			
				20°C Rise	40°C Rise	Typ @			Max
						10%	20%	30%	
PCXLR402-R47M	0.47	6.0	6.8	9.8	13.2	7.0	10.0	14.0	12.5
PCXLR402-R68M	0.68	7.3	8.2	9.2	12.0	5.2	8.0	11.6	10.0
PCXLR402-R82M	0.82	8.6	9.5	8.5	11.5	4.8	6.5	10.2	9.0
PCXLR402-1R0M	1.00	10.6	11.7	8.0	11.0	4.5	5.4	9.2	8.0
PCXLR402-1R2M	1.20	12.2	13.4	7.2	9.5	4.3	5.0	8.6	7.5
PCXLR402-1R5M	1.50	14.4	15.8	6.7	9.1	4.1	4.5	7.5	6.7
PCXLR402-2R0M	2.00	21.15	23.3	6.2	8.2	3.2	4.0	6.2	5.0
PCXLR402-2R2M	2.20	21.35	23.5	6.0	8.0	3.1	3.8	6.0	4.8
PCXLR402-3R3M	3.30	34.2	38.3	4.4	5.5	2.7	3.4	5.3	4.4

All specifications subject to change without notice.


### Features

- High Operating Temperature Range
- High Efficiency
- High Current with Soft Saturation
- Low DCR
- Suitable for pick and place
- Very low acoustic noise and very low leakage flux noise.

### Electrical

**Inductance Range:** 0.47μH to 3.3μH  
**Tolerance:** ±20% Across entire series  
**Test Frequency:** 100KHz, 0.1V  
**Operating Temp:** -40°C to +125°C  
**MSL:** Level 1  
**Irms:** Current at which ΔT=20°C & ΔT=40°C temp rise without core loss.  
**Isat:** Current at which Inductance drop is approximately 10%, 20%, and 30%. The part temperature (ambient + temp rise) should not exceed 125°C under worst case operating conditions.

### Reflow Soldering

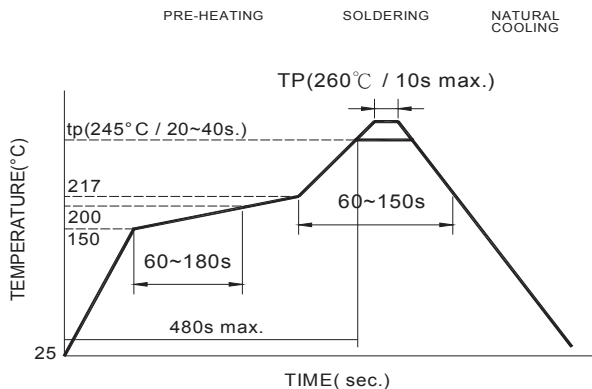

Reflow times: 3 times max.

### Resistance to Soldering Heat

**Pre-Heat:** 150°C, 1 minute.  
**Solder Composition:** Sn96.5% Ag3% Cu0.5%  
**Solder Temp:** 245°C ± 5°C  
**Immersion Time:** 4 sec. ± 1 sec.  
**Depth:** Completely cover the termination

### Test Equipment


(L): HP4284A LCR meter or equivalent  
**DCR:** CH16502, Agilent 33420A Mirco-Ohmmeter

### Physical

**Packaging:** 3000 pieces per 13 inch reel.  
**Marking:** EIA Inductance Code/ Date Code




Typical Performance Curves

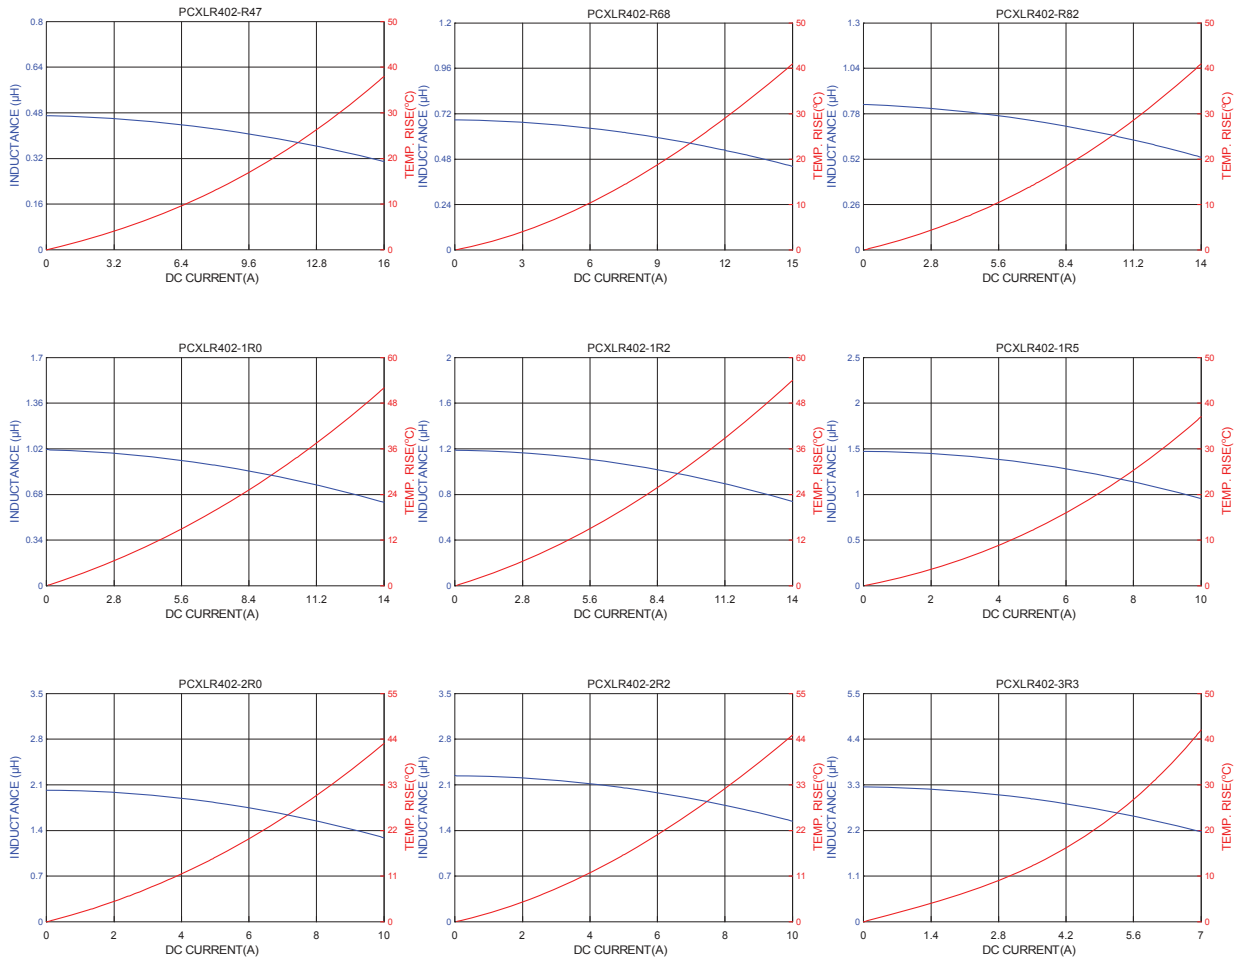




Packaging Information

Reel Dimension

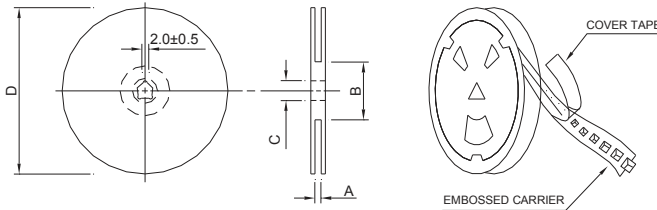


Type	A(mm)	B(mm)	C(mm)	D(mm)
330x12mm	12.4+2/-0	100±2	13+0.5/-0.2	330

Tape Dimension

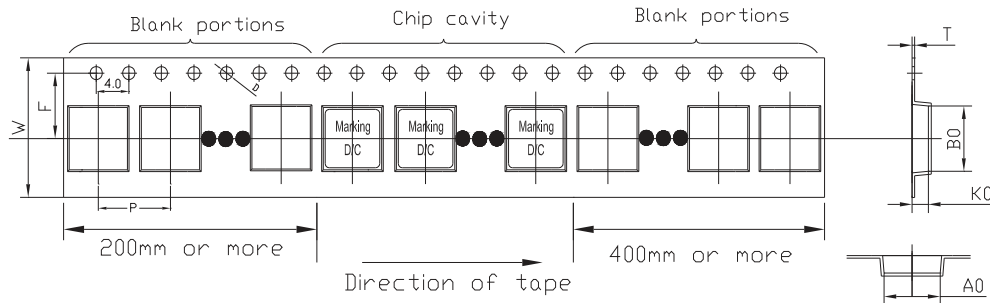

Bo(mm)	Ao(mm)	Ko(mm)	P(mm)	W(mm)	F(mm)	T(mm)	D(mm)
4.4±0.1	4.4±0.1	2.3±0.1	8.0±0.1	12±0.3	5.5±0.1	0.35±0.1	1.5±0.1

Tearing Off Force

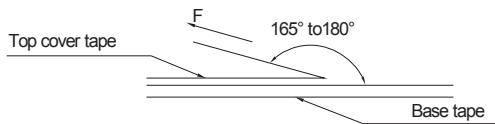

The force for tearing off cover tape is 10 to 130 grams in the arrow direction under the following conditions(referenced ANSI/EIA-481-D-2008 of 4.11 standard).

Room Temp. (°C)	Room Humidity (%)	Room atm (hPa)	Tearing Speed mm/min
5~35	45~85	860~1060	300

Application Notice

- Storage Conditions
  - To maintain the solderability of terminal electrodes:
  - 1. PCXLR402 Series meets IPC/JEDEC J-STD-020D standard-MSL, level 1.
  - 2. Temperature and humidity conditions: Less than 40°C and 60% RH.
  - 3. Recommended products should be used within 12 months from the time of delivery.
  - 4. The packaging material should be kept where no chlorine or sulfur exists in the air.
- Transportation
  - 1. Products should be handled with care to avoid damage or contamination from perspiration and skin oils.
  - 2. The use of tweezers or vacuum pick up is strongly recommended for individual components.
  - 3. Bulk handling should ensure that abrasion and mechanical shock are minimized.